

# **CE EMC TEST REPORT**

for

**AC DC Power Module**

**Model : TPM 10103; TPM 10105; TPM 10112;  
TPM 10115; TPM 10124**

**Brand : TRACO<sup>®</sup>  
POWER**

Test Report Number:  
90525402-01-E

Issued for

**TRACO ELECTRONIC AG**

P.O. Box Jenatschstrasse 1 CH-8002 Zurich Switzerland

Issued by

Compliance Certification Services Inc.

Tainan Laboratory

No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua

Township, Tainan Hsien 712, Taiwan R.O.C.

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Issued Date: August 5, 2009



***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, NIST or any government agencies. The test results in the report only apply to the tested sample.*



**REVISION HISTORY**

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		August 5, 2009		Initial Issue	ALL	Leah Peng

**TABLE OF CONTENTS**

<b>1</b>	<b>TEST CERTIFICATION.....</b>	<b>4</b>
<b>2</b>	<b>TEST RESULT SUMMARY .....</b>	<b>5</b>
<b>3</b>	<b>EUT DESCRIPTION.....</b>	<b>6</b>
<b>4</b>	<b>TEST METHODOLOGY .....</b>	<b>7</b>
4.1.	DECISION OF FINAL TEST MODE.....	7
4.2.	EUT SYSTEM OPERATION .....	7
<b>5</b>	<b>SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1.	DESCRIPTION OF SUPPORT UNITS .....	8
5.2.	CONFIGURATION OF SYSTEM UNDER TEST.....	8
<b>6</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>9</b>
6.1.	FACILITIES .....	9
6.2.	ACCREDITATIONS .....	9
6.3.	MEASUREMENT UNCERTAINTY .....	9
<b>7</b>	<b>EMISSION TEST .....</b>	<b>10</b>
7.1.	CONDUCTED EMISSION MEASUREMENT.....	10
7.2.	RADIATED EMISSION MEASUREMENT .....	23
7.3.	HARMONICS CURRENT MEASUREMENT .....	37
7.4.	VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT .....	40
<b>8</b>	<b>IMMUNITY TEST .....</b>	<b>43</b>
8.1.	GENERAL DESCRIPTION .....	43
8.2.	GENERAL PERFORMANCE CRITERIA DESCRIPTION.....	44
8.3.	ELECTROSTATIC DISCHARGE (ESD).....	45
8.4.	RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS) .....	50
8.5.	ELECTRICAL FAST TRANSIENT (EFT) .....	54
8.6.	SURGE IMMUNITY TEST .....	57
8.7.	CONDUCTED RADIO FREQUENCY DISTURBANCES (CS) .....	61
8.8.	POWER FREQUENCY MAGNETIC FIELD .....	65
8.9.	VOLTAGE DIP & VOLTAGE INTERRUPTIONS .....	68
<b>9</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>71</b>

**1 TEST CERTIFICATION****Product:** AC DC Power Module**Model:** TPM 10103; TPM 10105; TPM 10112; TPM 10115; TPM 10124**Brand:** **TRACO<sup>®</sup>**  
**POWER****Applicant:** TRACO ELECTRONIC AG

P.O. Box Jenatschstrasse 1 CH-8002 Zurich Switzerland

**Tested:** July 29, 2009 ~ August 3, 2009**Applicable Standards:****EN 61000-6-4 : 2007****EN 55011:2007**

EN 61000-3-3: 1995+A1: 2001+A2: 2005

**EN 61000-6-2 : 2005**

IEC 61000-4-2:1995+A1:1998+A2:2000

IEC 61000-4-3:2006

IEC 61000-4-4:2004

IEC 61000-4-5:2005

IEC 61000-4-6:2007

IEC 61000-4-8:1993+A1:2000

IEC 61000-4-11:2004

**Deviation from Applicable Standard**

None

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

*Approved by:***Jeter Wu**

Section Manager

*Reviewed by:***Eric Huang**

Assistant Section Manager



## 2 TEST RESULT SUMMARY

EMISSION			
Standard	Item	Result	Remarks
EN 61000-6-4 : 2007 EN 55011:2007	Conducted (Main Port)	PASS	Meets the requirements
	Radiated	PASS	Meets the requirements
EN 61000-3-2: 2006	Harmonic current emissions	PASS	Meets the requirements
EN 61000-3-3: 1995+A1: 2001+A2: 2005	Voltage fluctuations & flicker	PASS	Meets the requirements

Standard	Item	Result	Remarks
IEC 61000-4-2: 1995 + A1: 1998 + A2: 2000	ESD	PASS	Meets the requirements of Performance Criterion B
IEC 61000-4-3: 2006	RS	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 2004	EFT	PASS	Meets the requirements of Performance Criterion B
IEC 61000-4-5: 2005	Surge	PASS	Meets the requirements of Performance Criterion B
IEC 61000-4-6: 2007	CS	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-8: 1993 + A1: 2000	PFMF	PASS	Meets the requirements of Performance Criterion A
IEC 61000-4-11: 2004	Voltage dips & voltage variations	PASS	Meets the requirements of <b>Voltage Dips:</b> 1) >95% reduction Performance Criterion B 2) 60% reduction Performance Criterion C 3) 30% reduction Performance Criterion C <b>Voltage Interruptions:</b> 1) >95% reduction Performance Criterion C.

**NOTE:** 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.  
2. The information of measurement uncertainty is available upon the customer's request.

**3 EUT DESCRIPTION**

<b>Product</b>	AC DC Power Module
<b>Model</b>	TMPM 10103; TMPM 10105; TMPM 10112; TMPM 10115; TMPM 10124
<b>Brand</b>	<b>TRACO<sup>®</sup> POWER</b>
<b>Applicant</b>	TRACO ELECTRONIC AG
<b>Housing material</b>	PBT + 10% ~ 15% FRP
<b>EUT Type</b>	<input checked="" type="checkbox"/> Engineering Sample <input type="checkbox"/> Product Sample <input type="checkbox"/> Mass Product Sample
<b>Serial Number</b>	90525402
<b>Received Date</b>	May 25, 2009
<b>Power Source</b>	TMPM 10103: 3.3Vdc, 2500mA Max., 250mA Min. TMPM 10105: 5Vdc, 2000mA Max., 200mA Min. TMPM 10112: 12Vdc, 833mA Max., 83mA Min. TMPM 10115: 15Vdc, 667mA Max., 67mA Min. TMPM 10124: 24Vdc, 417mA Max., 42mA Min.

**NOTE:** 1. Client consigns 5 model samples to test (Model Number: **TMPM 10103; TMPM 10105; TMPM 10112; TMPM 10115; TMPM 10124**).  
Therefore, the testing Lab. just guarantees the units, which has been tested.  
2. For more details, please refer to the User's manual of the EUT.

## **4 TEST METHODOLOGY**

### **4.1. DECISION OF FINAL TEST MODE**

The EUT was tested together with the above additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The test configuration/ mode is as the following:

#### **Emission Test Mode:**

1. Full load (TMPM 10103).
2. Full load (TMPM 10105).
3. Full load (TMPM 10112).
4. Full load (TMPM 10115).
5. Full load (TMPM 10124).

#### **Immunity Test Mode:**

1. Normal operation (TMPM 10103).

### **4.2. EUT SYSTEM OPERATION**

1. Setup whole system for test as shown on setup diagram.
2. Turn on power and check E.U.T. function.
3. Start to test.



## 5 SETUP OF EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Manufacturer	Model No.	FCC ID	Signal Cable
1	N/A	N/A	N/A	N/A	N/A

No.	Signal cable description	
A	AC Power Input cable	Unshielded, 1.2m, 1pcs.
B	DC Power Output cable	Unshielded, 0.2m, 2pcs.

**Note:**

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 5.2. CONFIGURATION OF SYSTEM UNDER TEST





## 6 FACILITIES AND ACCREDITATIONS

### 6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua Township, Tainan Hsien 712, Taiwan R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC
<b>Japan</b>	VCCI
<b>Canada</b>	INDUSTRY CANADA
<b>Taiwan</b>	TAF, BSMI
<b>Europe</b>	TÜV NORD

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsemc.com.tw>

### 6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	± 2.05 dB
Radiated emissions	200MHz ~1000MHz	± 2.39 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 7 EMISSION TEST

### 7.1. CONDUCTED EMISSION MEASUREMENT

#### 7.1.1. LIMITS

Frequency band MHz	Class A equipment limits dB(μV)					
	Group 1		Group 2		Group 2 <sup>a</sup>	
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0,15 – 0,50	79	66	100	90	130	120
0,50 – 5	73	60	86	76	125	115
5 – 30	73	60	90 Decreasing linearly with logarithm of frequency to 70	80 60	115	105
NOTE Care should be taken to comply with leakage current requirements.						
<sup>a</sup> Mains supply currents in excess of 100 A per phase when using the CISPR voltage probe or a suitable V-network (LISN or AMN).						

Class B equipment limits dB(μV)		
Frequency band MHz	Groups 1 and 2	
	Quasi-peak	Average
0,15 – 0,50	66 Decreasing linearly with logarithm of frequency to 56	56 Decreasing linearly with logarithm of frequency to 46
0,50 – 5	56	46
5 – 30	60	50
NOTE Care should be taken to comply with leakage current requirements.		

#### 7.1.2. TEST INSTRUMENTS

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8121	8121-446	NOV. 19, 2009 For Insertion loss
	Rohde & Schwarz	ESH 3-Z5	840062/021	OCT. 05, 2009
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	JUL. 02, 2010
TYPE N COAXIAL CABLE	SUHNER	BELDEN9913	2981	JAN. 14, 2010
Test S/W	e-3 (5.04211c) R&S (2.27)			

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### **7.1.3. TEST PROCEDURES**


#### **Procedure of Preliminary Test**

- The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55011(see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per EN 55011.
- The test equipment EUT installed received main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment power received from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

#### **Procedure of Final Test**

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

### 7.1.4. TEST SETUP

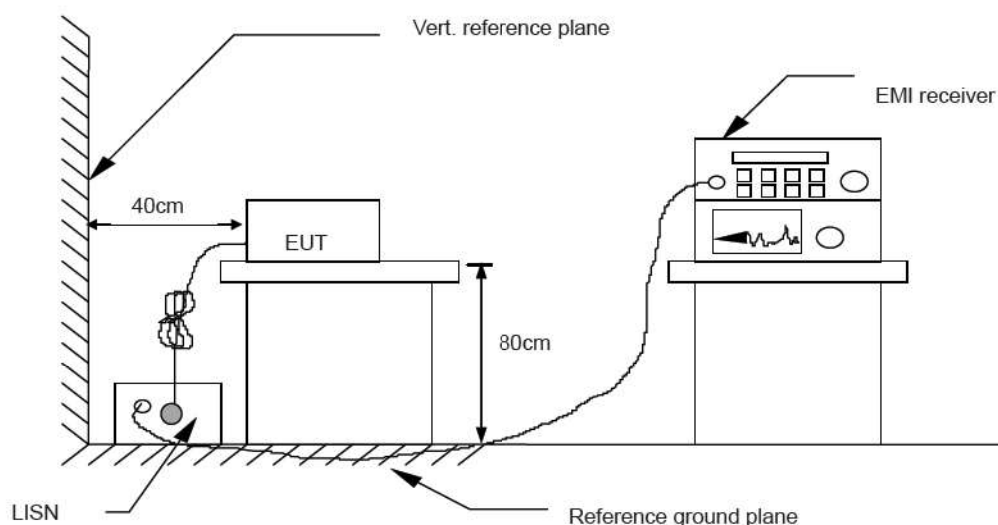

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 7.1.5. DATA SAMPLE

Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Meter Reading (dBuV)	Measured Level (dBuV)	Limits (dBuV)	Over Limits (dBuV)	Detector
x.xx	9.6	0.1	15.7	25.4	46	-20.6	QP


- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)



## 7.1.6. TEST RESULTS

Model No.	TMPM 10103	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		


LINE

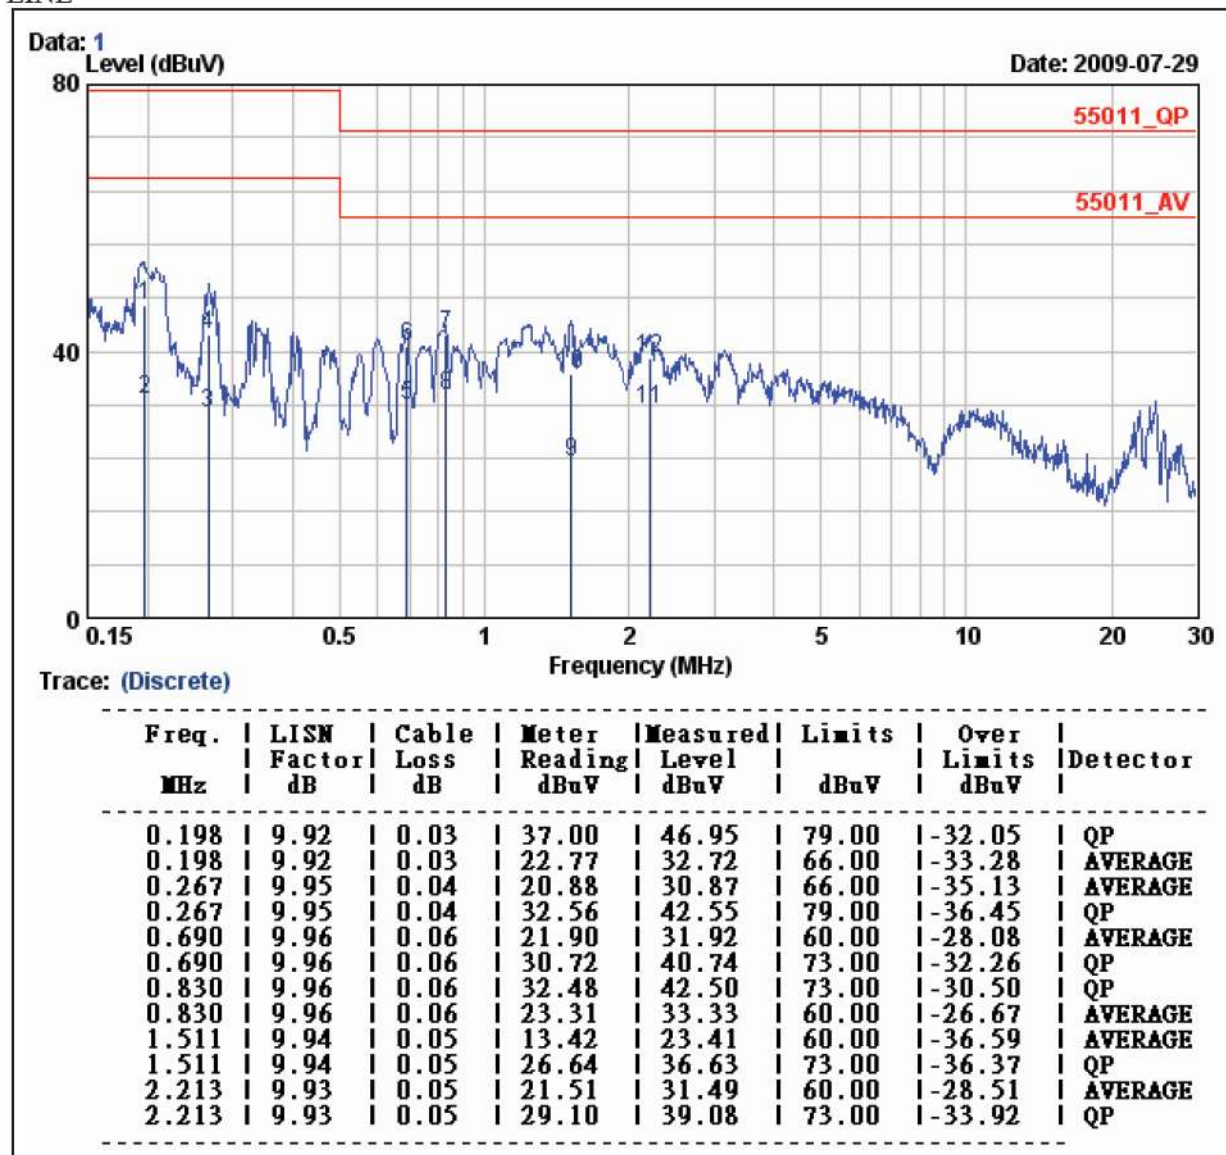

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)

Model No.	TMPM 10103	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by:	Agun Huang		


## NEUTRAL

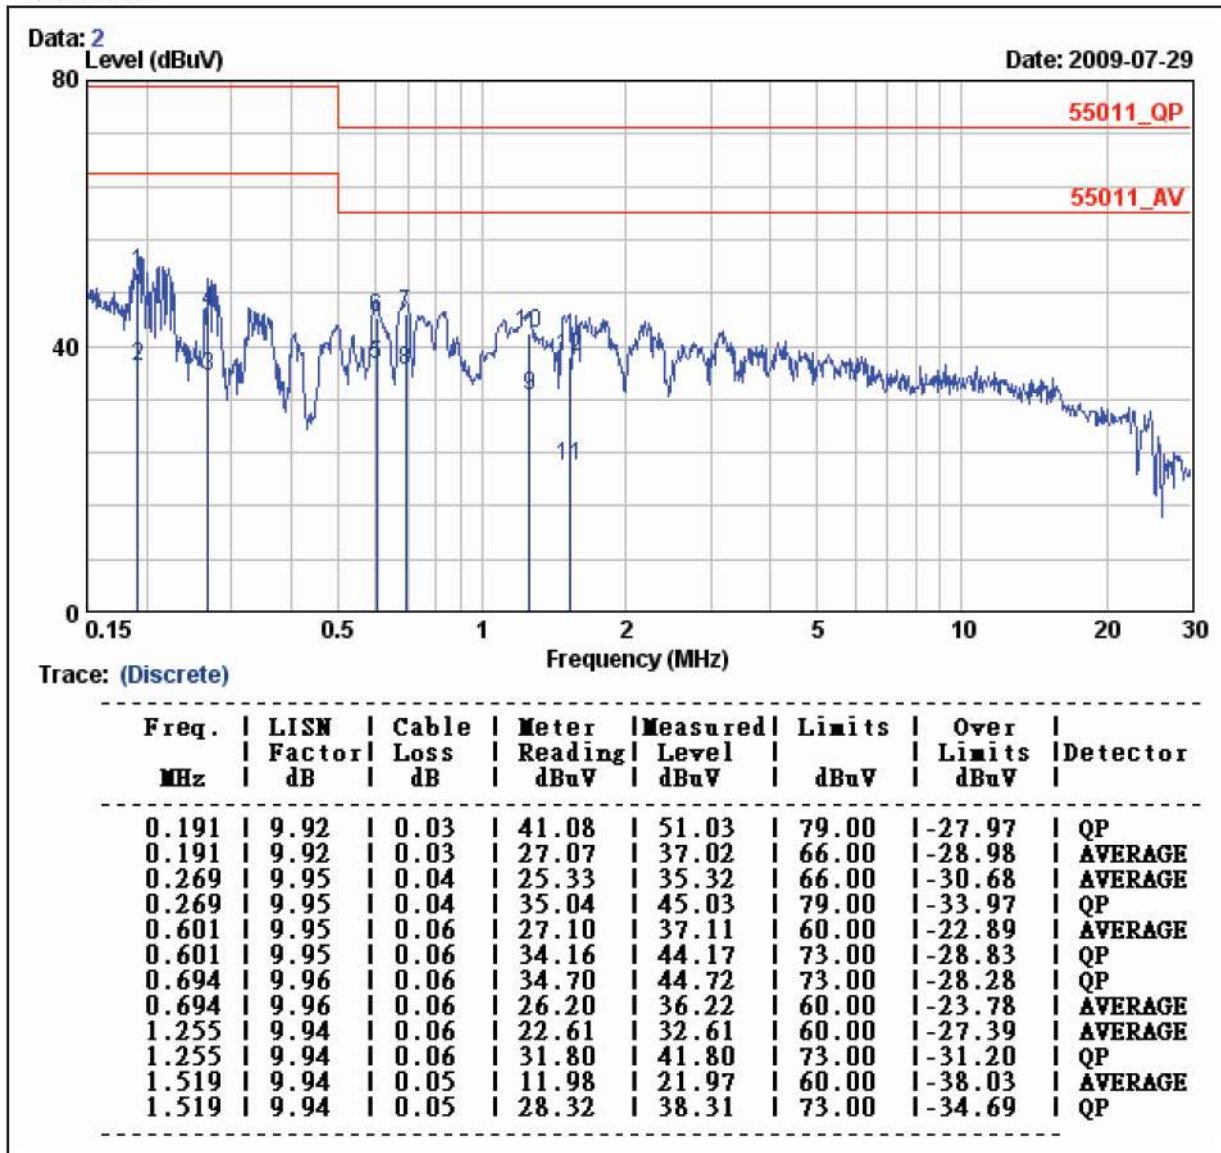

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)

Model No.	TMPM 10105	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

LINE

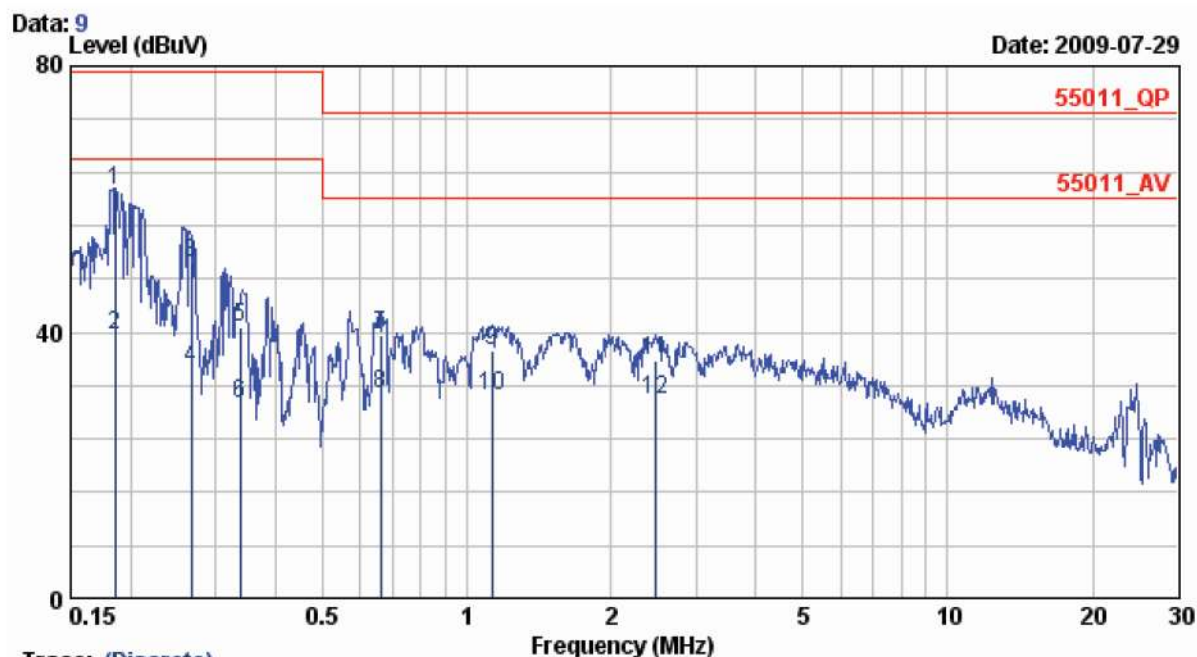

Trace: (Discrete)


Freq. MHz	LISN Factor dB	Cable Loss dB	Meter Reading dBuV	Measured Level dBuV	Limits dBuV	Over Limits dBuV	Detector
0.186	9.92	0.04	51.20	61.15	79.00	-17.85	QP
0.186	9.92	0.04	29.71	39.66	66.00	-26.34	AVERAGE
0.267	9.95	0.04	40.38	50.37	79.00	-28.63	QP
0.267	9.95	0.04	24.46	34.45	66.00	-31.55	AVERAGE
0.337	9.96	0.05	30.86	40.86	79.00	-38.14	QP
0.337	9.96	0.05	19.31	29.31	66.00	-36.69	AVERAGE
0.661	9.96	0.06	29.50	39.52	73.00	-33.48	QP
0.661	9.96	0.06	20.61	30.63	60.00	-29.37	AVERAGE
1.127	9.95	0.06	27.14	37.14	73.00	-35.86	QP
1.127	9.95	0.06	20.61	30.61	60.00	-29.39	AVERAGE
2.473	9.93	0.04	25.70	35.67	73.00	-37.33	QP
2.473	9.93	0.04	20.05	30.02	60.00	-29.98	AVERAGE

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)



Model No.	TMPM 10105	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

## NEUTRAL

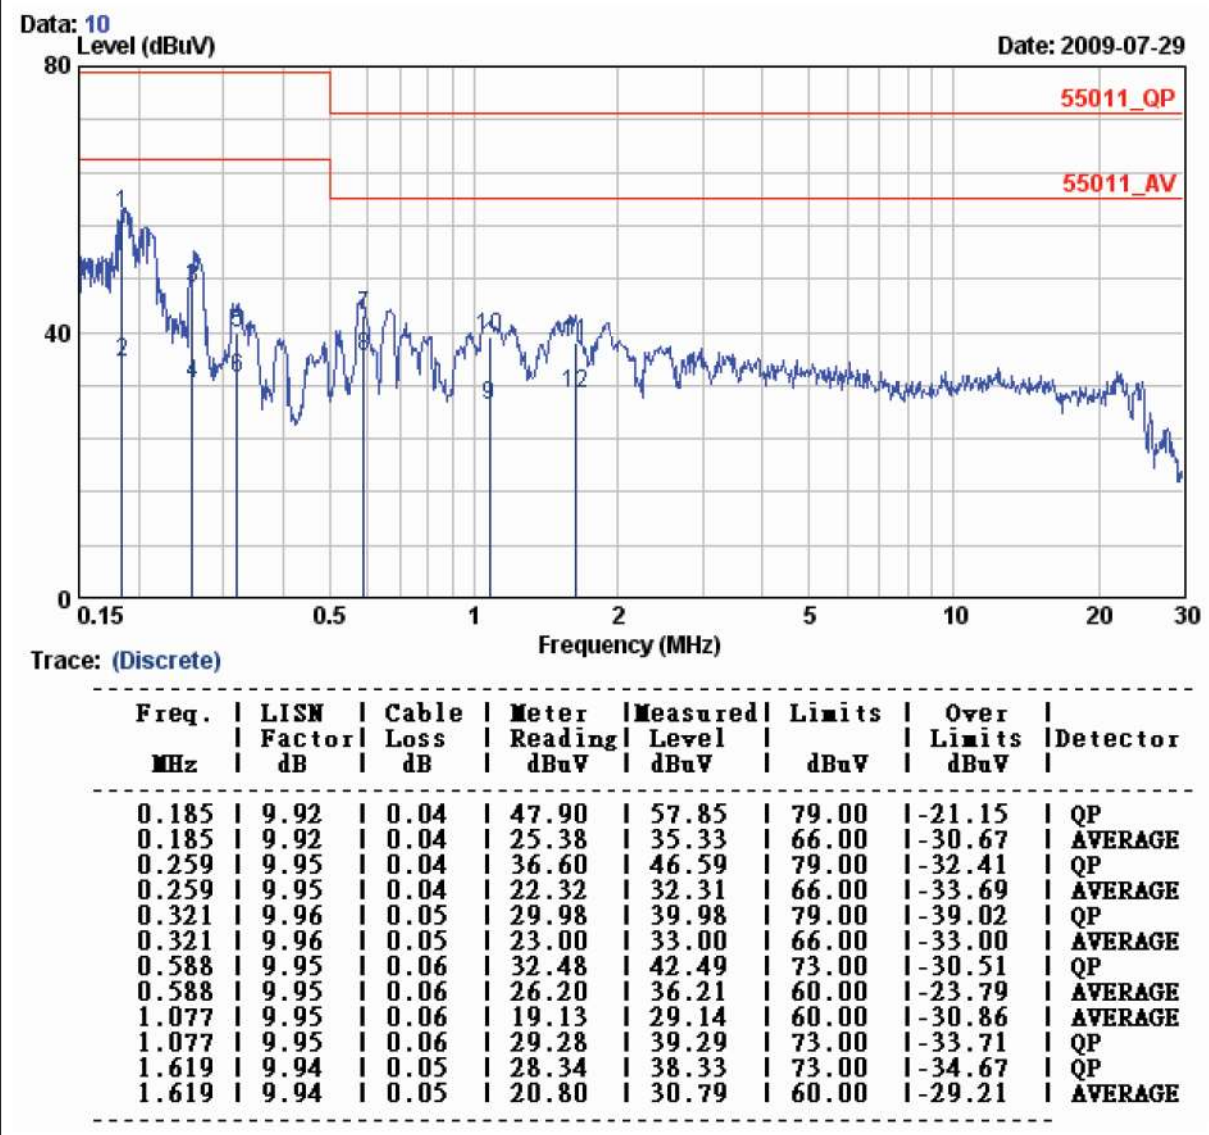


- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)



Model No.	TMPM 10112	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		


LINE

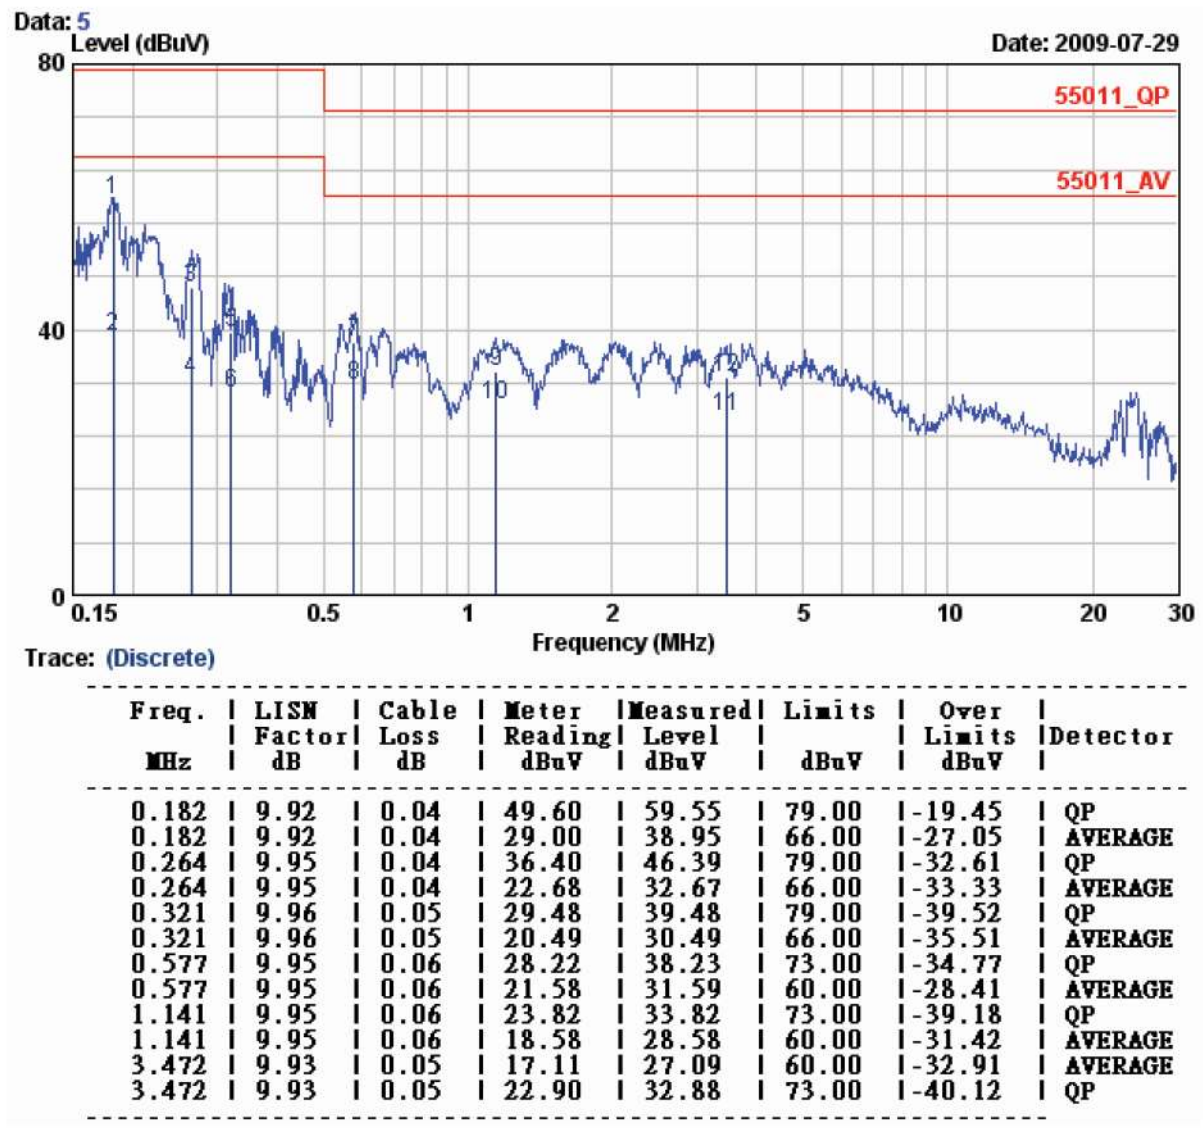

REMARKS : 1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)  
2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)

Model No.	TMPM 10112	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

## NEUTRAL

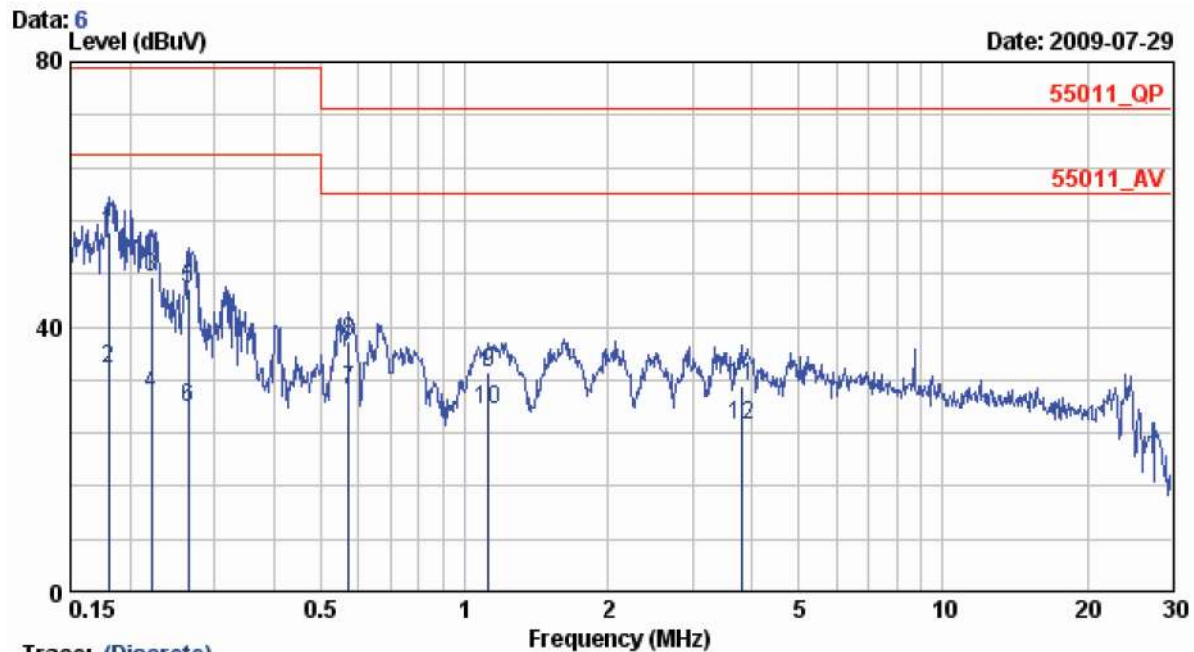


Trace: (Discrete)

Freq. MHz	LISN Factor dB	Cable Loss dB	Meter Reading dBuV	Measured Level dBuV	Limits dBuV	Over Limits dBuV	Detector
0.181	9.92	0.04	44.32	54.27	79.00	-24.73	QP
0.181	9.92	0.04	23.81	33.76	66.00	-32.24	AVERAGE
0.222	9.93	0.03	37.42	47.39	79.00	-31.61	QP
0.222	9.93	0.03	19.98	29.95	66.00	-36.05	AVERAGE
0.264	9.95	0.04	35.60	45.59	79.00	-33.41	QP
0.264	9.95	0.04	17.72	27.71	66.00	-38.29	AVERAGE
0.573	9.95	0.06	20.59	30.60	60.00	-29.40	AVERAGE
0.573	9.95	0.06	27.82	37.83	73.00	-35.17	QP
1.123	9.95	0.06	23.18	33.18	73.00	-39.82	QP
1.123	9.95	0.06	17.52	27.52	60.00	-32.48	AVERAGE
3.820	9.93	0.05	21.22	31.20	73.00	-41.80	QP
3.820	9.93	0.05	15.15	25.13	60.00	-34.87	AVERAGE

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)

Model No.	TMPM 10115	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

LINE

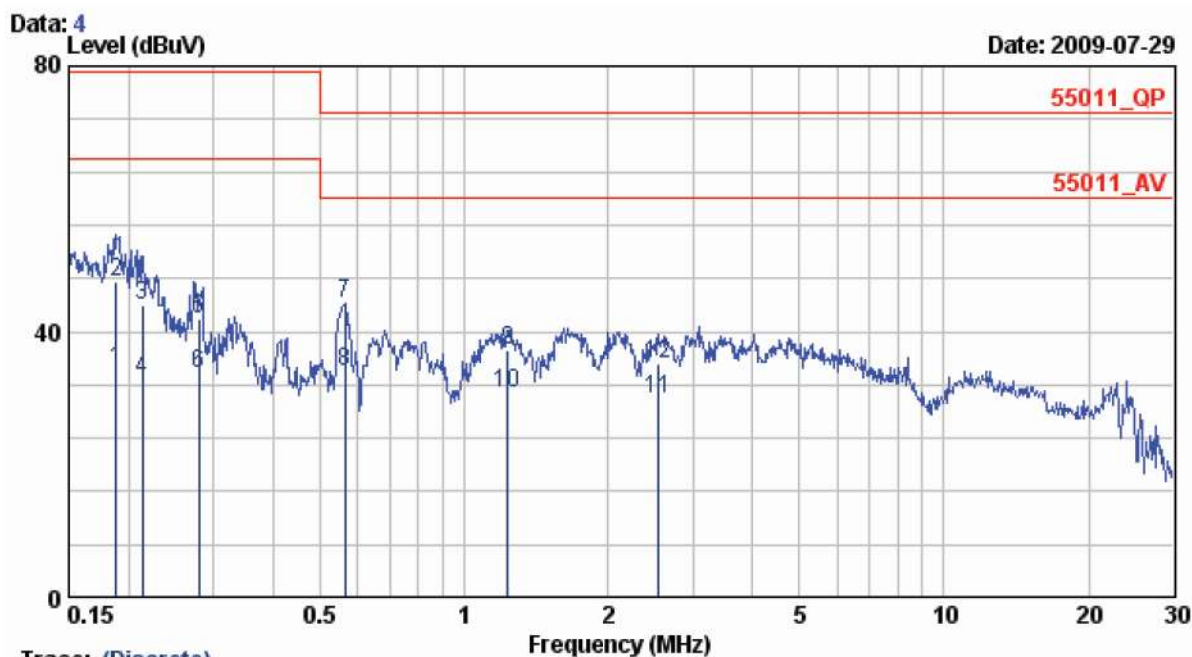

Trace: (Discrete)


Freq. MHz	LISN Factor dB	Cable Loss dB	Meter Reading dBuV	Measured Level dBuV	Limits dBuV	Over Limits dBuV	Detector
0.188	9.92	0.03	24.46	34.41	66.00	-31.59	AVERAGE
0.188	9.92	0.03	37.64	47.59	79.00	-31.41	QP
0.214	9.93	0.03	33.90	43.86	79.00	-35.14	QP
0.214	9.93	0.03	22.72	32.68	66.00	-33.32	AVERAGE
0.280	9.95	0.04	31.98	41.98	79.00	-37.02	QP
0.280	9.95	0.04	23.65	33.65	66.00	-32.35	AVERAGE
0.564	9.95	0.06	34.36	44.37	73.00	-28.63	QP
0.564	9.95	0.06	23.88	33.89	60.00	-26.11	AVERAGE
1.229	9.94	0.06	27.28	37.28	73.00	-35.72	QP
1.229	9.94	0.06	20.82	30.82	60.00	-29.18	AVERAGE
2.540	9.93	0.04	20.00	29.97	60.00	-30.03	AVERAGE
2.540	9.93	0.04	25.12	35.09	73.00	-37.91	QP

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)



Model No.	TMPM 10115	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

## NEUTRAL

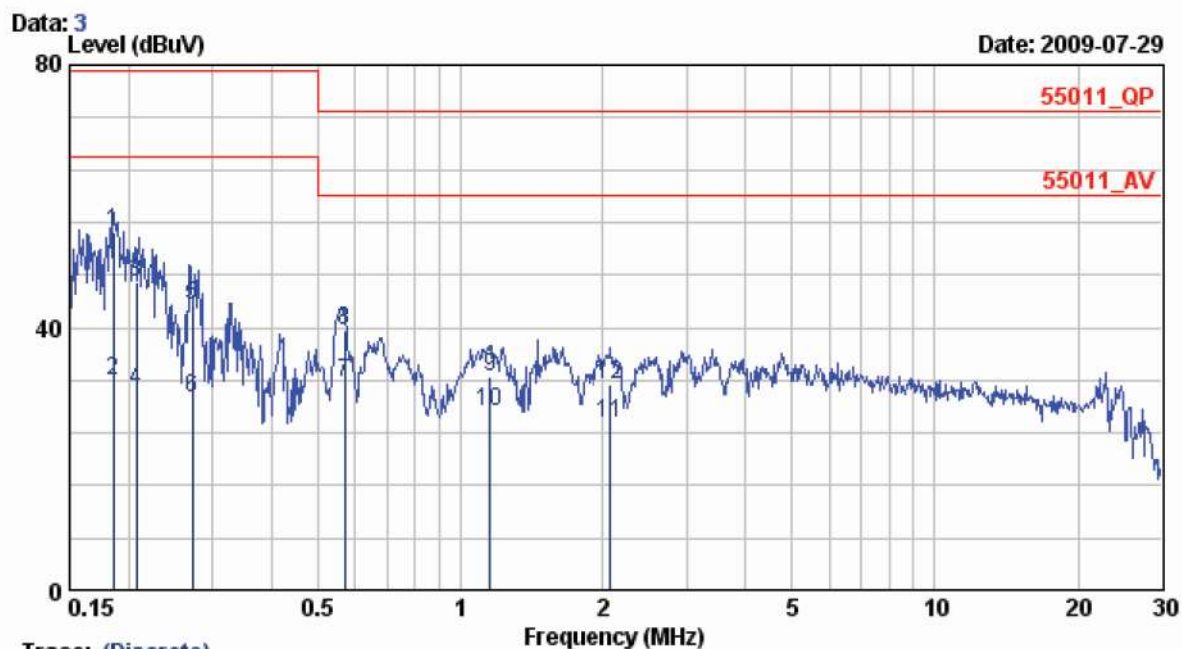

Trace: (Discrete)


Freq. MHz	LISN Factor dB	Cable Loss dB	Meter Reading dBuV	Measured Level dBuV	Limits dBuV	Over Limits dBuV	Detector
0.185	9.92	0.04	44.56	54.51	79.00	-24.49	QP
0.185	9.92	0.04	22.10	32.05	66.00	-33.95	AVERAGE
0.208	9.93	0.03	36.82	46.78	79.00	-32.22	QP
0.208	9.93	0.03	20.38	30.34	66.00	-35.66	AVERAGE
0.273	9.95	0.04	33.26	43.25	79.00	-35.75	QP
0.273	9.95	0.04	19.36	29.35	66.00	-36.65	AVERAGE
0.569	9.95	0.06	21.58	31.59	60.00	-28.41	AVERAGE
0.569	9.95	0.06	29.54	39.55	73.00	-33.45	QP
1.153	9.95	0.06	22.66	32.66	73.00	-40.34	QP
1.153	9.95	0.06	17.14	27.14	60.00	-32.86	AVERAGE
2.077	9.93	0.05	15.37	25.35	60.00	-34.65	AVERAGE
2.077	9.93	0.05	21.34	31.32	73.00	-41.68	QP

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)



Model No.	TMPM 10124	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

LINE

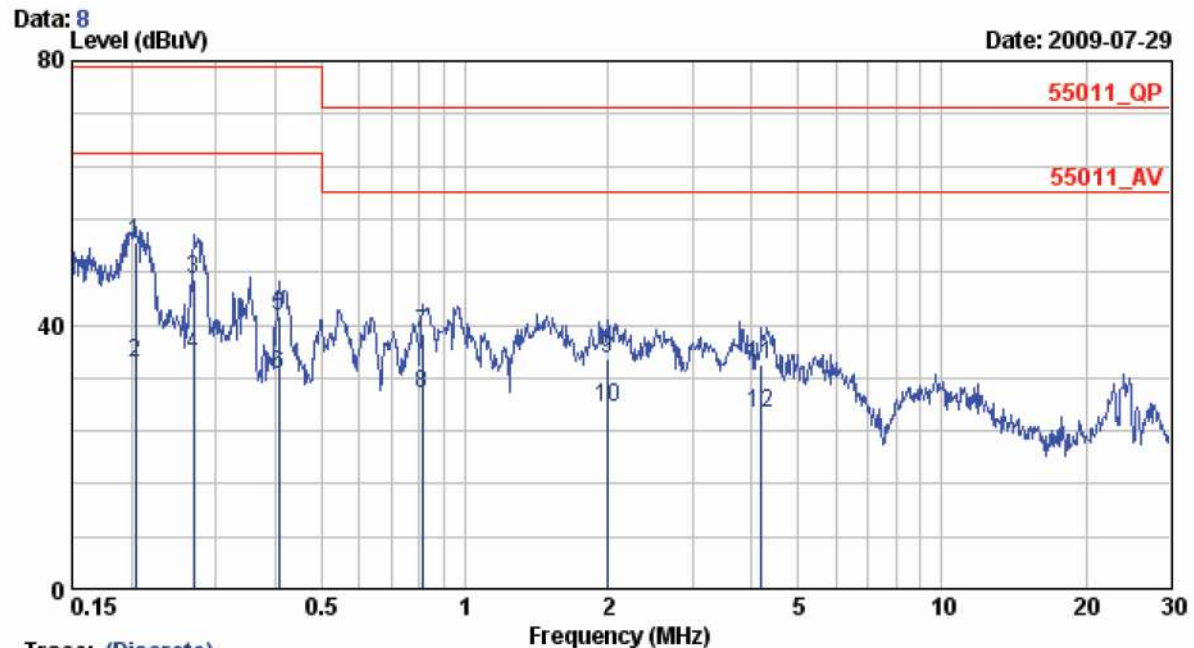


Trace: (Discrete)

Freq. MHz	LISN Factor dB	Cable Loss dB	Meter Reading dBuV	Measured Level dBuV	Limits dBuV	Over Limits dBuV	Detector
0.204	9.93	0.03	42.42	52.38	79.00	-26.62	QP
0.204	9.93	0.03	24.37	34.33	66.00	-31.67	AVERAGE
0.270	9.95	0.04	36.86	46.85	79.00	-32.15	QP
0.270	9.95	0.04	25.40	35.39	66.00	-30.61	AVERAGE
0.406	9.95	0.05	31.26	41.26	79.00	-37.74	QP
0.406	9.95	0.05	22.49	32.49	66.00	-33.51	AVERAGE
0.813	9.96	0.06	28.64	38.66	73.00	-34.34	QP
0.813	9.96	0.06	19.44	29.46	60.00	-30.54	AVERAGE
1.991	9.93	0.05	24.96	34.94	73.00	-38.06	QP
1.991	9.93	0.05	17.43	27.41	60.00	-32.59	AVERAGE
4.180	9.94	0.06	23.94	33.93	73.00	-39.07	QP
4.180	9.94	0.06	16.77	26.76	60.00	-33.24	AVERAGE

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)

Model No.	TMPM 10124	Resolution Bandwidth	9 kHz
Environmental Conditions	26°C, 50%	Test Mode	Full load
Tested by	Agun Huang		

## NEUTRAL

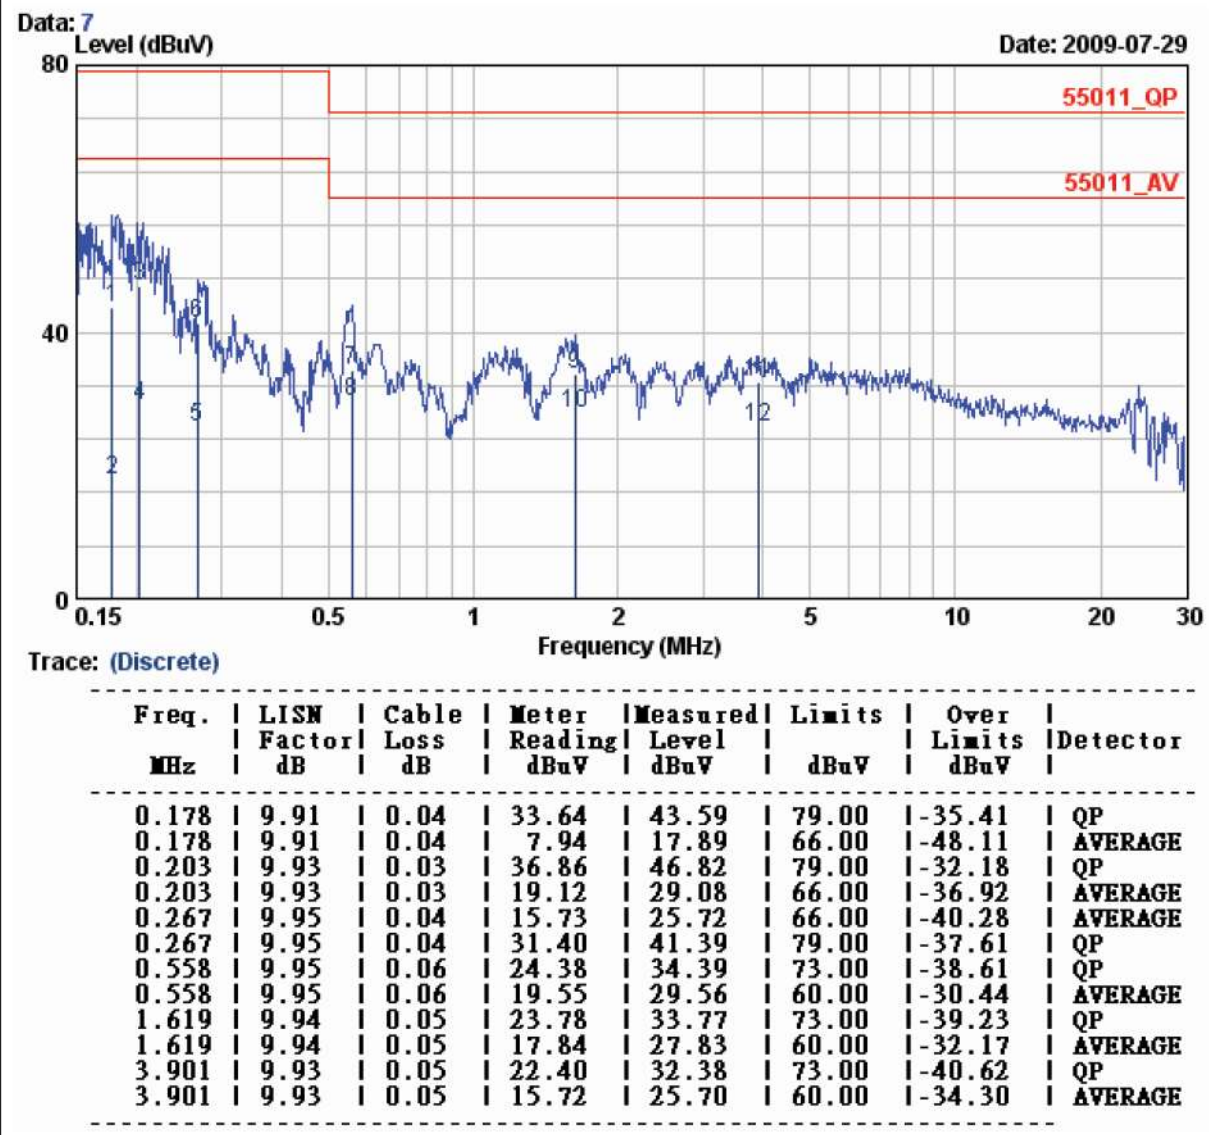

- REMARKS :
1. Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB)
  2. Over Limit value (dB) = Level (dBuV) – Limit Line (dBuV)

**7.2. RADIATED EMISSION MEASUREMENT****7.2.1. LIMITS**

Frequency band  MHz	Measured on a test site		Measured <i>in situ</i>
	Group 1, class A 10 m measurement distance  dB(μV/m)	Group 1, class B 10 m measurement distance  dB(μV/m)	Group 1, class A Limits with measuring distance 30 m from exterior wall outside the building in which the equipment is situated dB(μV/m)
0,15 – 30	Under consideration	Under consideration	Under consideration
30 – 230	40	30	30
230 – 1 000	47	37	37

**7.2.2. TEST INSTRUMENTS**

Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Receiver	R&S	ESVS10	833206/012	APR. 28, 2010
Pre-Amplifier	HP	8447F	2944A03817	NOV. 1, 2009
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	AUG. 26, 2009
BI-LOG Antenna	Sunol	JB1	A070506-2	SEP. 8, 2009
Test Software	EMI e-3 / AUDIX (5.04211c)			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R = No Calibration Request.





### **7.2.3. TEST PROCEDURE**

#### **Procedure of Preliminary Test**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per EN 55011.
- All I/O cables were positioned to simulate typical usage as per EN 55011.
- The EUT received main power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.
- The antenna was placed at 10 meter away from the EUT as stated in EN 55011. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.






**Procedure of Final Test**

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- The test data of the worst-case condition(s) was recorded.

#### 7.2.4. TEST SETUP

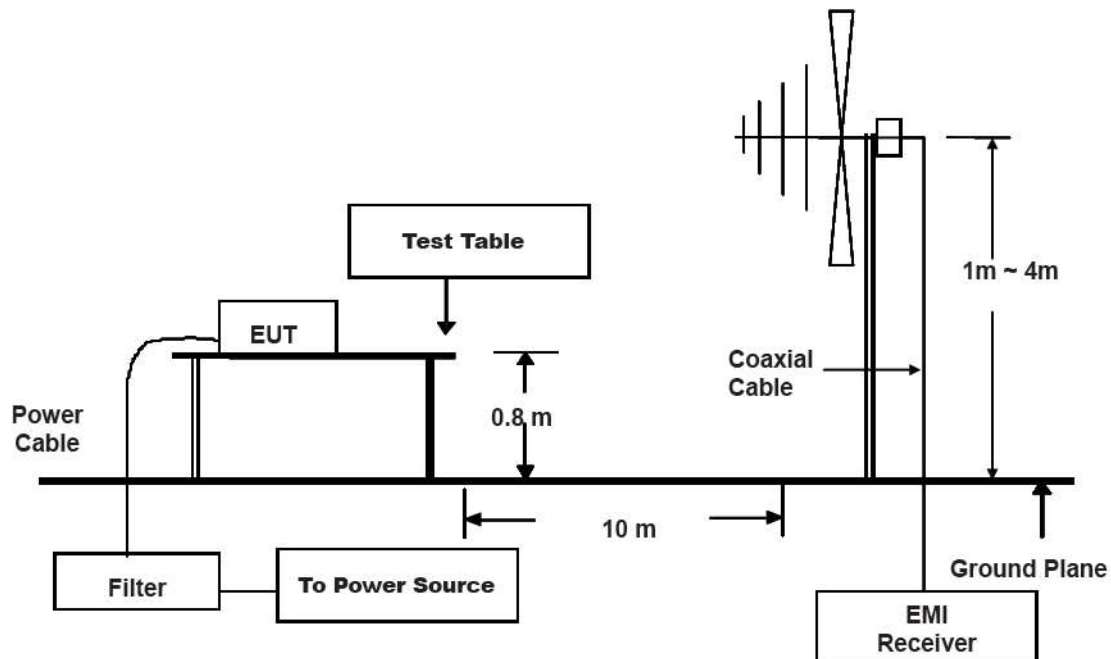

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 7.2.5. DATA SAMPLE


Freq. (MHz)	Reading Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dBuV/m)
XX.XX	14.00	12	0.2	26.2	30	-3.80

- REMARKS :
- Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)
  - Over Limit value (dB) = Level (dBuV/m) - Limit Line (dBuV/m)

**7.2.6. TEST RESULTS**

<b>Model No.</b>	TMPM 10103	<b>Test Mode</b>	Full load
<b>Environmental Conditions</b>	28.3°C, 59 % RH	<b>Resolution Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function:</b>	Quasi-peak.	<b>Tested By</b>	John Chen

2009/7/30

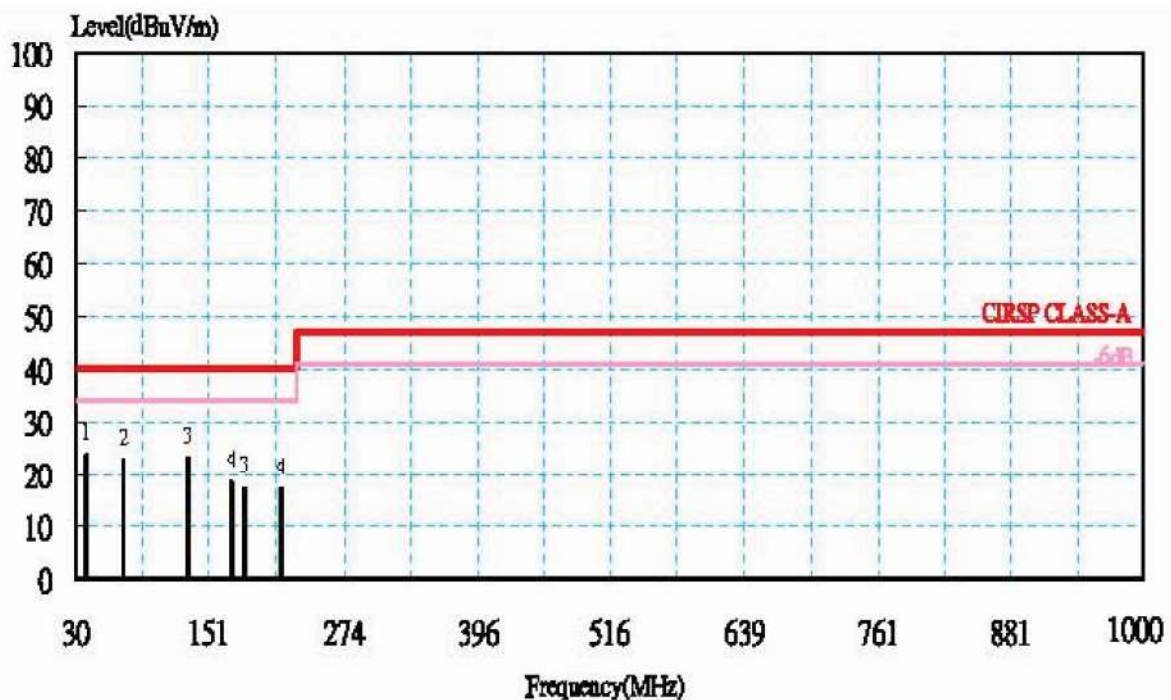


No.	Freq - Uency	Meter Reading at 10 m Level	Antenna Factor	Cable Loss	Emission at 10 m Level	Limits	Margin	Detector Mode
	(MHz)	(dBuV)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	PK/QP
1	39.99	9.10	13.34	1.24	23.68	40.00	-16.32	QP
2	73.24	13.46	7.71	1.62	22.79	40.00	-17.21	QP
3	132.88	7.60	13.25	2.19	23.04	40.00	-16.96	QP
4	171.95	4.50	11.49	2.48	18.47	40.00	-21.53	QP
5	183.35	3.40	11.39	2.56	17.35	40.00	-22.65	QP
6	216.42	3.40	11.03	2.78	17.21	40.00	-22.79	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
 2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)

Model No.	TMPM 10103	Test Mode	Full load
Environmental Conditions	28.3°C, 59 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	John Chen

2009/7/30

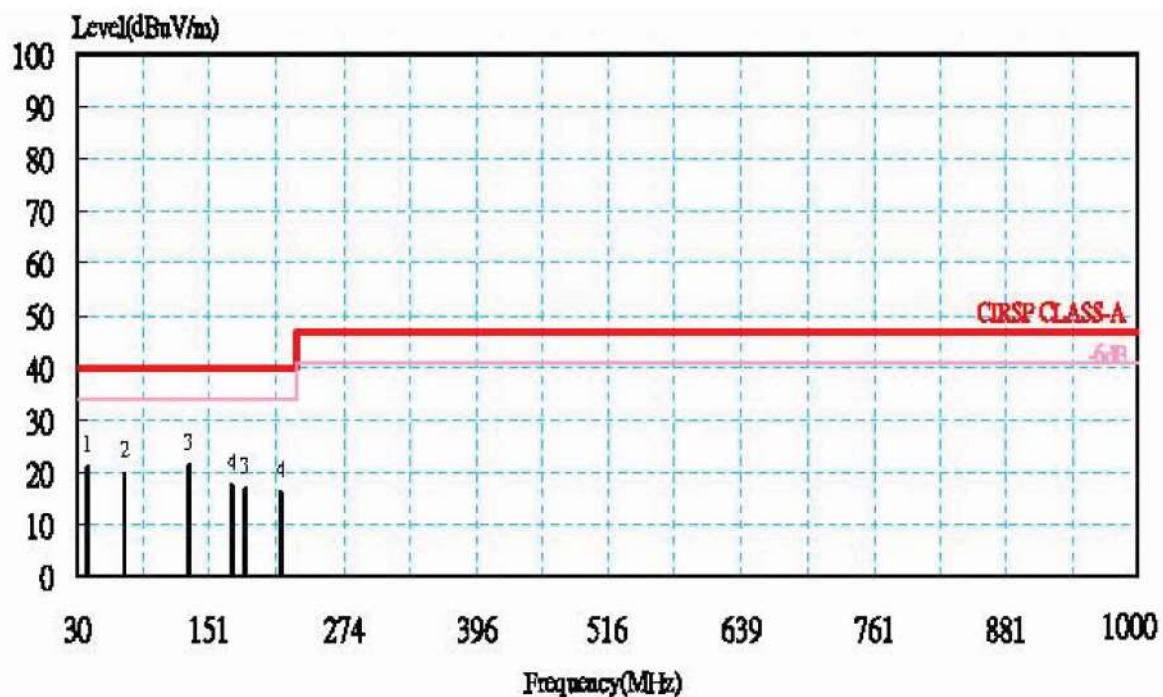


No.	Freq- Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode PK/QP
1	39.99	6.40	13.34	1.24	20.98	40.00	-19.02	QP
2	73.24	10.50	7.71	1.62	19.83	40.00	-20.17	QP
3	132.88	5.80	13.25	2.19	21.24	40.00	-18.76	QP
4	171.95	3.60	11.49	2.48	17.57	40.00	-22.43	QP
5	183.35	2.90	11.39	2.56	16.85	40.00	-23.15	QP
6	216.42	2.40	11.03	2.78	16.21	40.00	-23.79	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)



Model No.	TMPM 10105	Test Mode	Full load
Environmental Conditions	28.3°C, 59 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function:	Quasi-peak.	Tested By	John Chen

2009/7/30

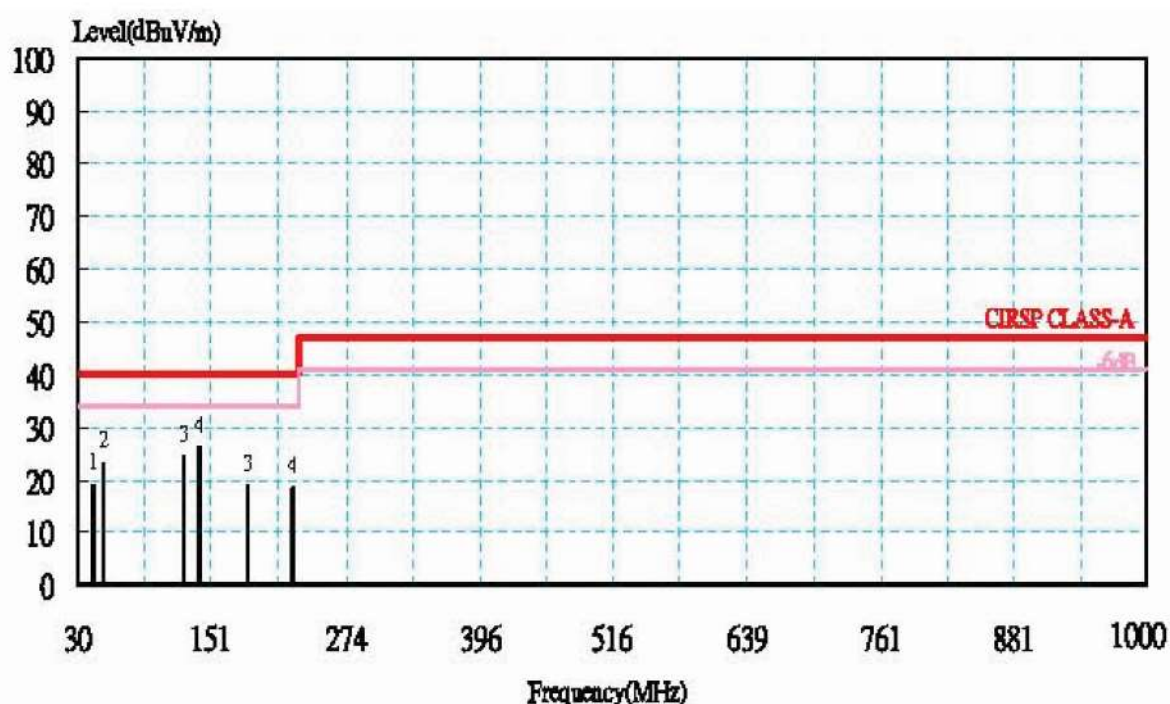


No.	Freq- Uency (MHz)	Meter Reading at 10 m Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Mode
1	43.48	6.90	10.78	1.29	18.96	40.00	-21.04	QP
2	53.59	14.10	7.68	1.41	23.19	40.00	-16.81	QP
3	126.42	8.70	13.46	2.13	24.30	40.00	-15.70	QP
4	140.63	10.90	12.98	2.25	26.13	40.00	-13.87	QP
5	184.21	4.90	11.46	2.57	18.93	40.00	-21.07	QP
6	225.41	4.60	10.90	2.86	18.36	40.00	-21.64	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)

<b>Model No.</b>	TMPM 10105	<b>Test Mode</b>	Full load
<b>Environmental Conditions</b>	28.3°C, 59 % RH	<b>Resolution Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested By</b>	John Chen

2009/7/30

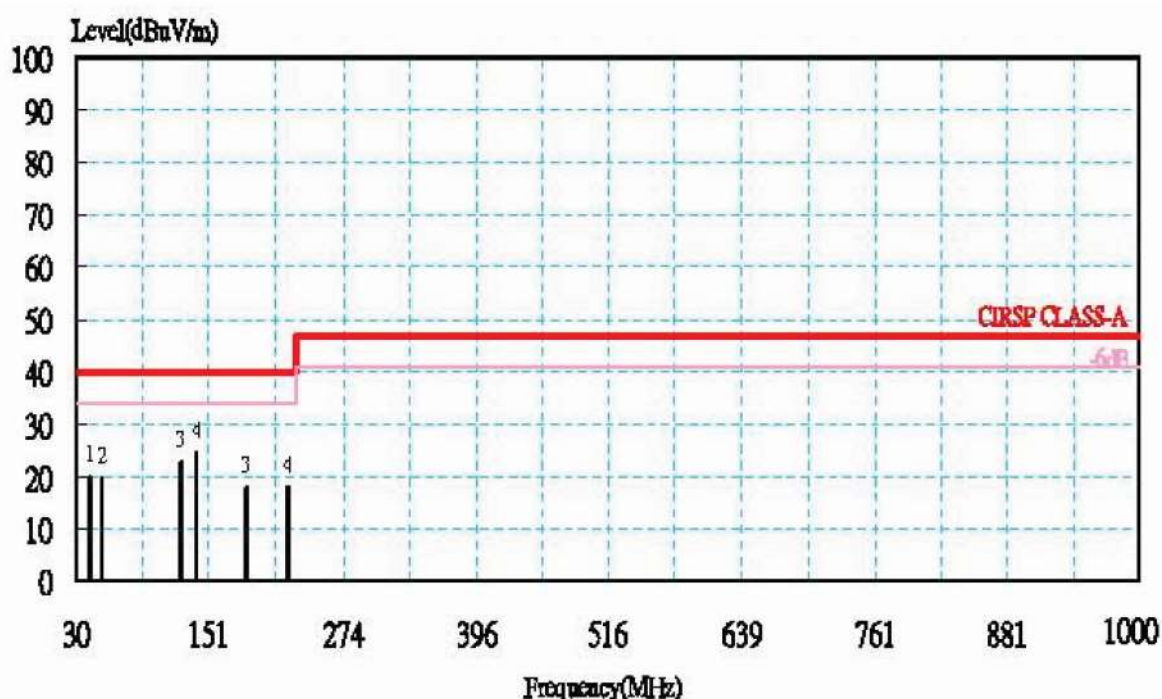


No.	Freq- Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode PK/QP
1	42.12	6.80	11.77	1.27	19.84	40.00	-20.16	QP
2	53.65	10.60	7.68	1.41	19.69	40.00	-20.31	QP
3	125.21	7.20	13.51	2.12	22.83	40.00	-17.17	QP
4	139.65	9.20	13.02	2.25	24.47	40.00	-15.53	QP
5	185.24	3.80	11.55	2.57	17.92	40.00	-22.08	QP
6	223.54	4.30	10.81	2.84	17.95	40.00	-22.05	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
 2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)

<b>Model No.</b>	TMPM 10112	<b>Test Mode</b>	Full load
<b>Environmental Conditions</b>	28.3°C, 59 % RH	<b>Resolution Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested By</b>	John Chen

2009/7/30

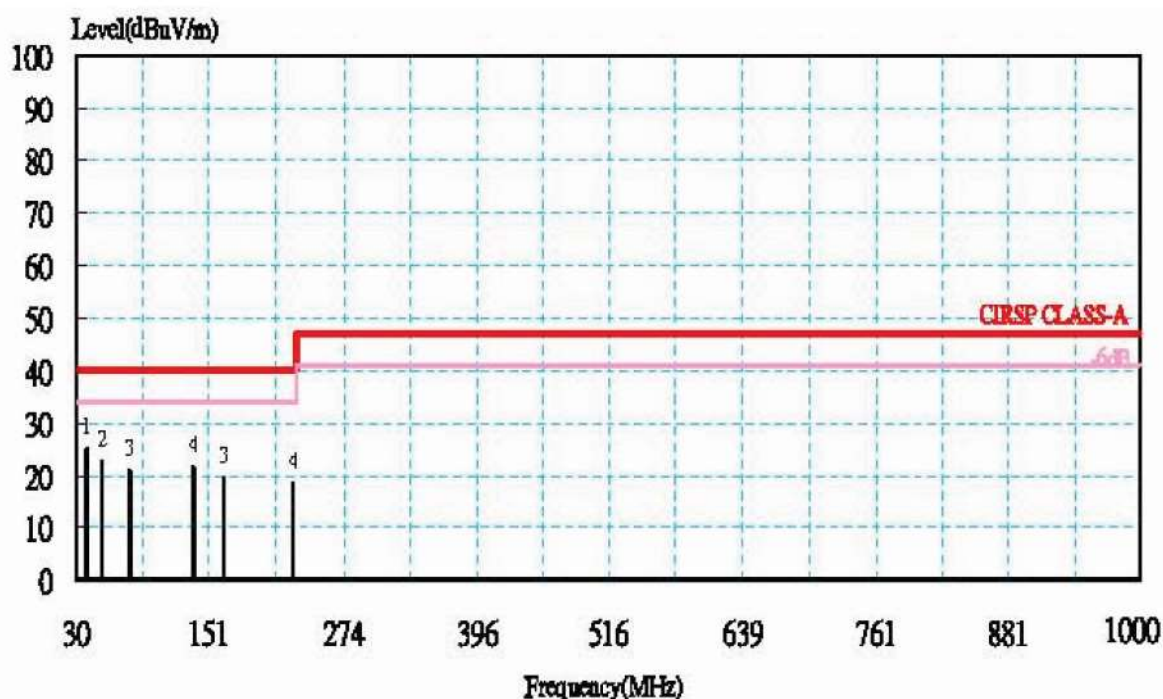


No.	Freq - Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode
1	39.88	10.40	13.41	1.24	25.05	40.00	-14.95	QP
2	53.36	13.60	7.69	1.41	22.70	40.00	-17.30	QP
3	78.93	11.50	7.58	1.75	20.84	40.00	-19.16	QP
4	136.76	6.30	13.12	2.22	21.64	40.00	-18.36	QP
5	164.32	5.30	11.86	2.41	19.58	40.00	-20.42	QP
6	227.05	4.60	10.98	2.87	18.45	40.00	-21.55	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
 2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)



Model No.	TMPM 10112	Test Mode	Full load
Environmental Conditions	28.3°C, 59 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	John Chen

2009/7/30

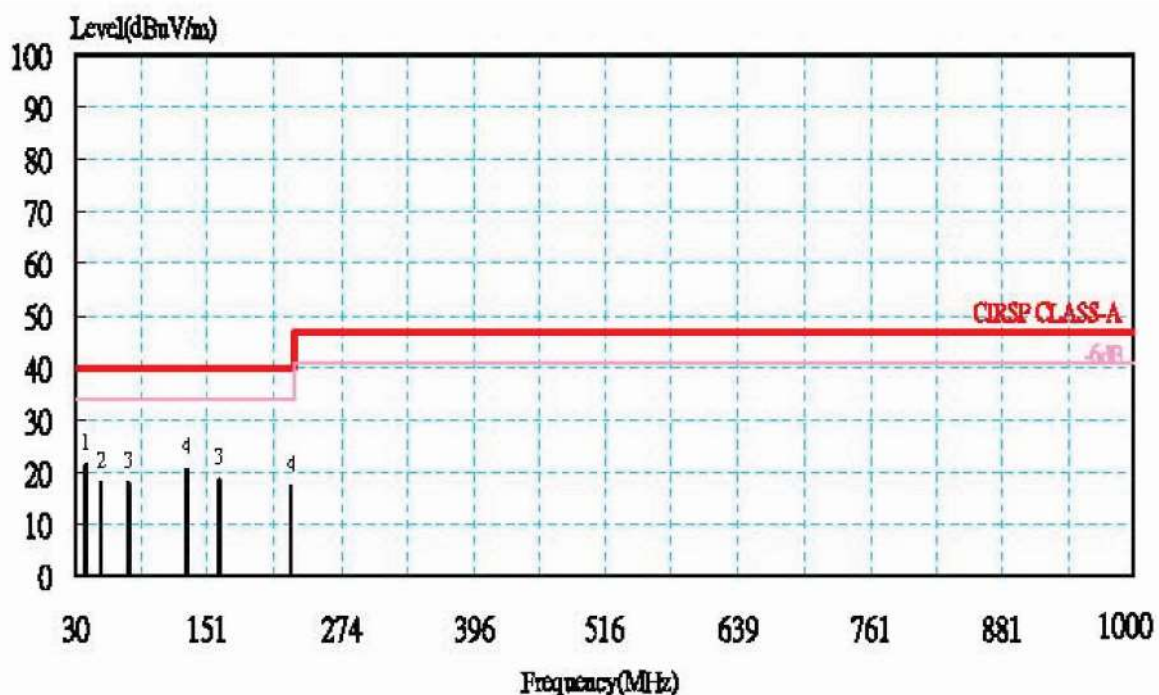


No.	Freq - Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode
1	39.88	6.60	13.41	1.24	21.25	40.00	-18.75	QP
2	53.36	8.90	7.69	1.41	18.00	40.00	-22.00	QP
3	78.93	8.60	7.58	1.75	17.94	40.00	-22.06	QP
4	132.19	5.10	13.27	2.18	20.56	40.00	-19.44	QP
5	162.45	4.20	11.95	2.40	18.55	40.00	-21.45	QP
6	227.05	3.30	10.98	2.87	17.15	40.00	-22.85	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
 2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)



<b>Model No.</b>	TMPM 10115	<b>Test Mode</b>	Full load
<b>Environmental Conditions</b>	28.3°C, 59 % RH	<b>Resolution Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested By</b>	John Chen

2009/7/30

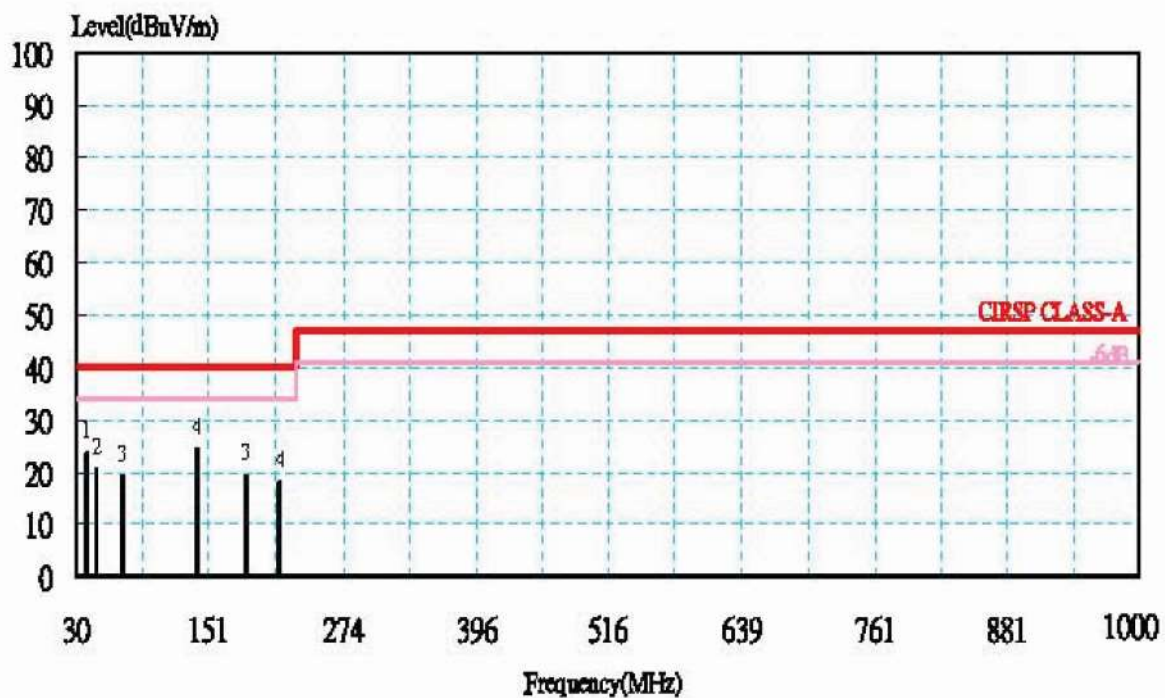


No.	Freq - Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode
1	39.88	9.10	13.41	1.24	23.75	40.00	-16.25	QP
2	48.49	10.90	8.39	1.37	20.66	40.00	-19.34	QP
3	72.84	9.90	7.72	1.61	19.23	40.00	-20.77	QP
4	140.81	9.20	12.97	2.26	24.43	40.00	-15.57	QP
5	185.14	5.20	11.54	2.57	19.31	40.00	-20.69	QP
6	215.63	4.30	11.11	2.77	18.19	40.00	-21.81	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)

<b>Model No.</b>	TMPM 10115	<b>Test Mode</b>	Full load
<b>Environmental Conditions</b>	28.3°C, 59 % RH	<b>Resolution Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Horizontal	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested By</b>	John Chen

2009/7/30

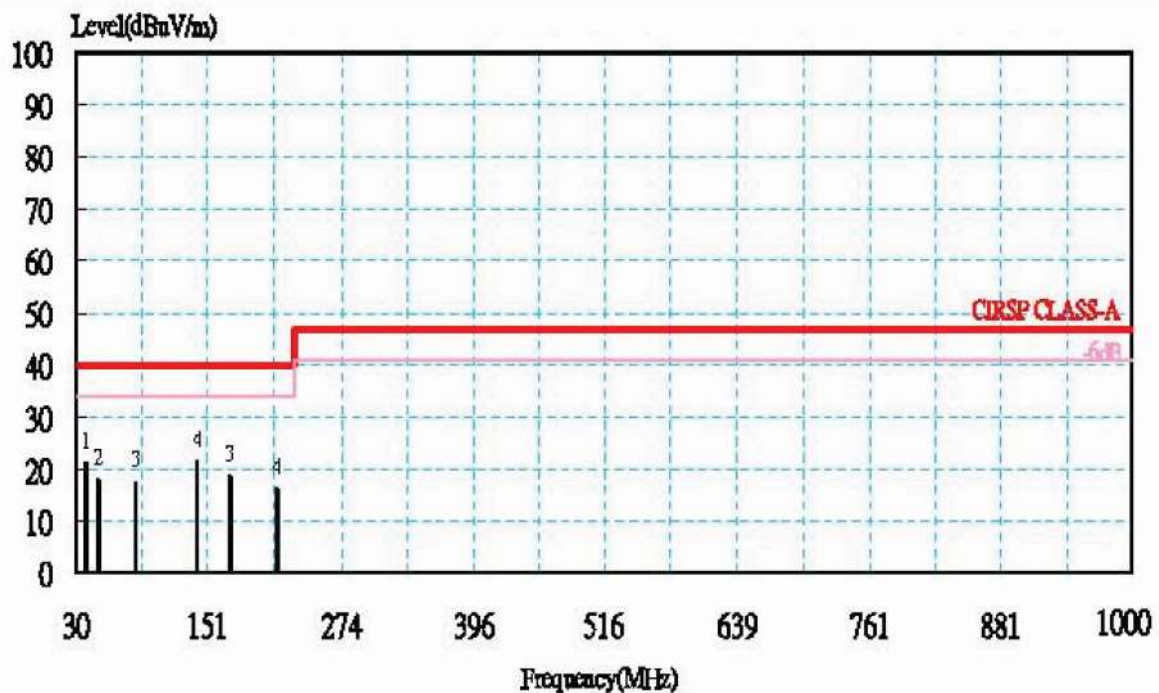


No.	Freq- Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode PK/QP
1	39.88	6.50	13.41	1.24	21.15	40.00	-18.85	QP
2	50.16	8.70	7.83	1.39	17.92	40.00	-22.08	QP
3	84.26	7.90	7.70	1.81	17.41	40.00	-22.59	QP
4	141.65	6.20	12.93	2.26	21.39	40.00	-18.61	QP
5	171.32	4.50	11.52	2.47	18.49	40.00	-21.51	QP
6	214.51	2.10	11.24	2.76	16.10	40.00	-23.90	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
 2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)

<b>Model No.</b>	TMPM 10124	<b>Test Mode</b>	Full load
<b>Environmental Conditions</b>	28.3°C, 59 % RH	<b>Resolution Bandwidth</b>	120 kHz
<b>Antenna Pole</b>	Vertical	<b>Antenna Distance</b>	10m
<b>Detector Function</b>	Quasi-peak.	<b>Tested By</b>	John Chen

2009/7/30

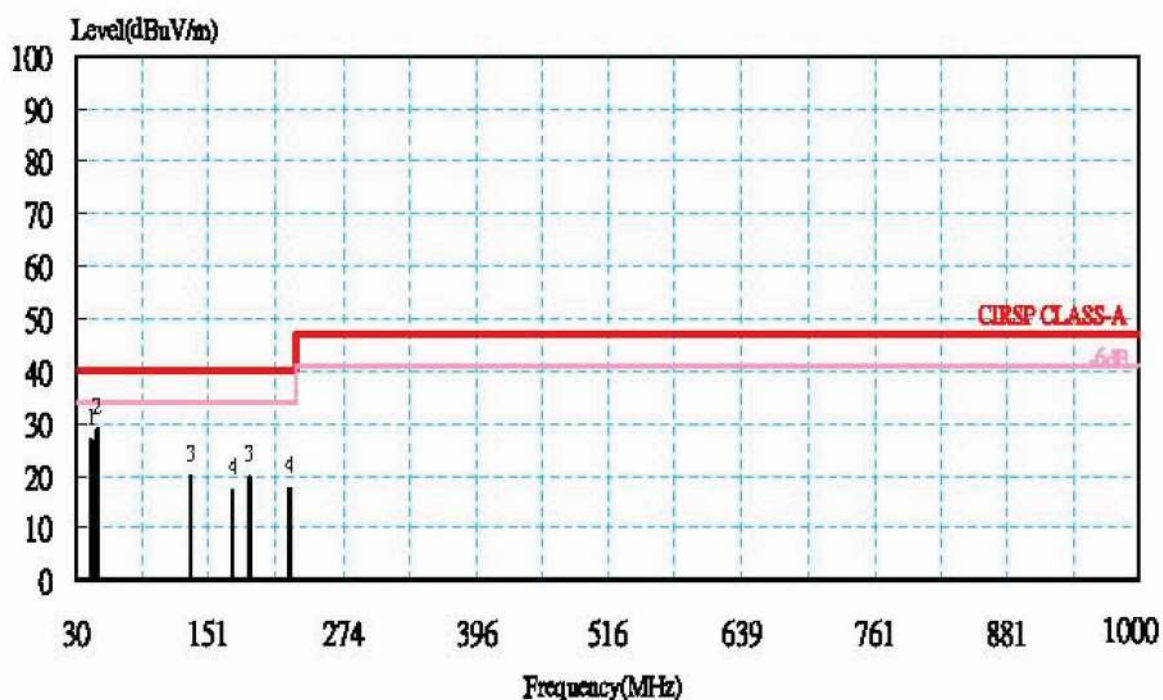


No.	Freq- Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode
1	43.37	14.60	10.86	1.29	26.74	40.00	-13.26	QP
2	49.41	19.50	8.05	1.38	28.94	40.00	-11.06	QP
3	134.12	4.50	13.21	2.20	19.91	40.00	-20.09	QP
4	172.12	3.40	11.48	2.48	17.36	40.00	-22.64	QP
5	188.20	5.40	11.80	2.59	19.79	40.00	-20.21	QP
6	225.65	3.90	10.91	2.86	17.67	40.00	-22.33	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)



Model No.	TMPM 10124	Test Mode	Full load
Environmental Conditions	28.3°C, 59 % RH	Resolution Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested By	John Chen

2009/7/30

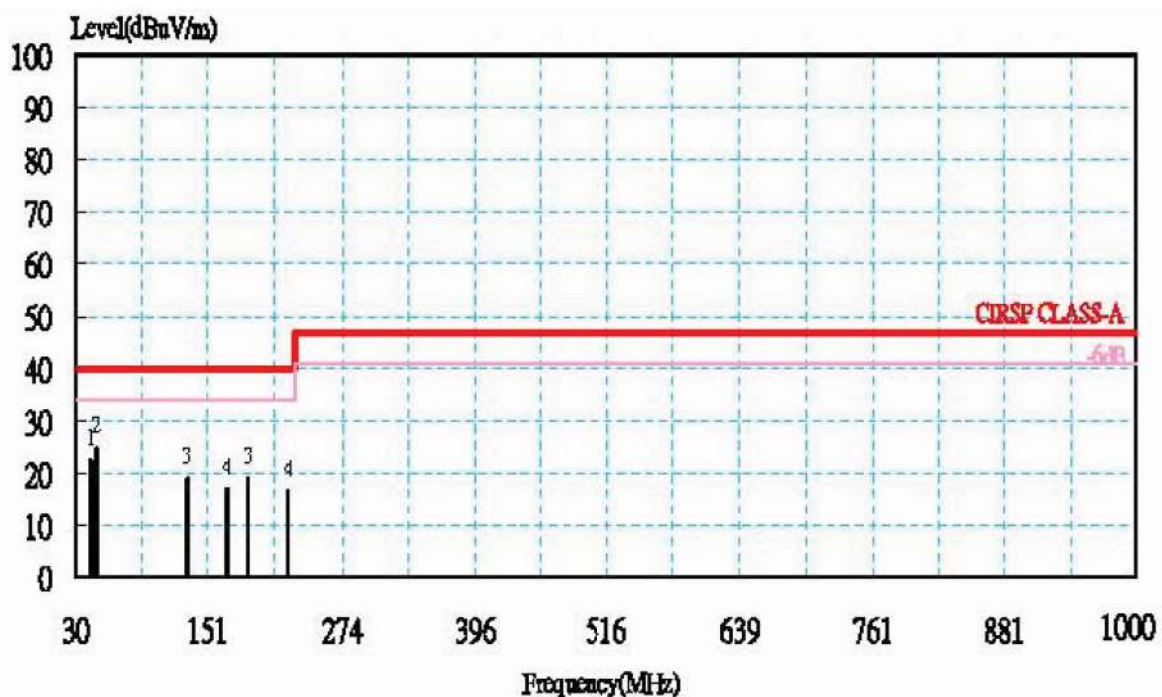

No.	Freq - Uency (MHz)	Meter Reading at 10 m Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission at 10 m Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Mode
1	43.37	10.24	10.86	1.29	22.38	40.00	-17.62	QP
2	49.41	15.24	8.05	1.38	24.68	40.00	-15.32	QP
3	132.41	3.50	13.26	2.19	18.95	40.00	-21.05	QP
4	168.12	2.90	11.68	2.44	17.02	40.00	-22.98	QP
5	187.12	4.60	11.71	2.59	18.90	40.00	-21.10	QP
6	224.54	2.80	10.86	2.85	16.51	40.00	-23.49	QP

REMARKS : 1.Level (dBuV/m) = Read Level (dBuV) + Antenna Factor (dB/m) + Cable loss (dB)  
2.Over Limit value (dB) = Level (dBuV/m)-Limit Line(dBuV/m)



**7.3. HARMONICS CURRENT MEASUREMENT****7.3.1. LIMITS OF HARMONICS CURRENT MEASUREMENT**

Limits for Class A equipment		Limits for Class D equipment		
Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
15<=n<=39	0.15x15/n	15<=n<=39	3.85/n	0.15x15/n
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
8<=n<=40	0.23x8/n			

**NOTE:** 1. Class A and Class D are classified according to item 7.3.3.

2. According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

**7.3.2. TEST INSTRUMENTS**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Harmonics Analyzer	TTI	HA1600	198202	DEC. 21, 2009
Test S/W	H/F HA 1600 PC LINK Field Probe			

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 7.3.3. TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The classification of EUT is according to section 5 of EN 61000-3-2.
- The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.


Class B: Portable tools; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.

Class D: Equipment having a specified power less than or equal to 600 W of the following types:  
Personal computers and personal computer monitors and television receivers.

- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

### 7.3.4. TEST SETUP

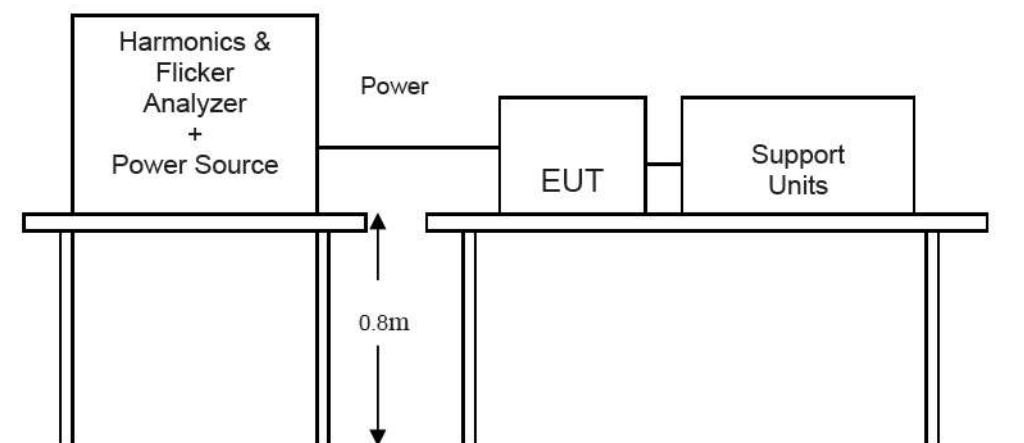

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.3.5.TEST RESULTS**

<b>Power Consumption</b>	N/A	<b>Test Results</b>	N/A
<b>Environmental Conditions</b>	N/A	<b>Limits</b>	Class <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
<b>Test Mode</b>	N/A	<b>Tested By</b>	N/A
<b>Tested Date</b>	N/A		

**NOTE:** 1. Limits classified according to item 7.3.3.

2. According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

**Test Result**

For the equipment with a rated power of 75 W or less, limits are not specified in this standard.

**7.4. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT****7.4.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT**

TEST ITEM	LIMIT	REMARK
$P_{st}$	1.0	$P_{st}$ means short-term flicker indicator.
$P_{lt}$	0.65	$P_{lt}$ means long-term flicker indicator.
$T_{dt}$ (ms)	500	$T_{dt}$ means maximum time that dt exceeds 3 %.
$d_{max}$ (%)	4%	$d_{max}$ means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

**7.4.2. TEST INSTRUMENTS**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Harmonics Analyzer	TTI	HA1600	198202	DEC. 21, 2009
Test S/W	H/F HA 1600 PC LINK Field Probe			


**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



#### 7.4.3. TEST PROCEDURE

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

#### 7.4.4. TEST SETUP

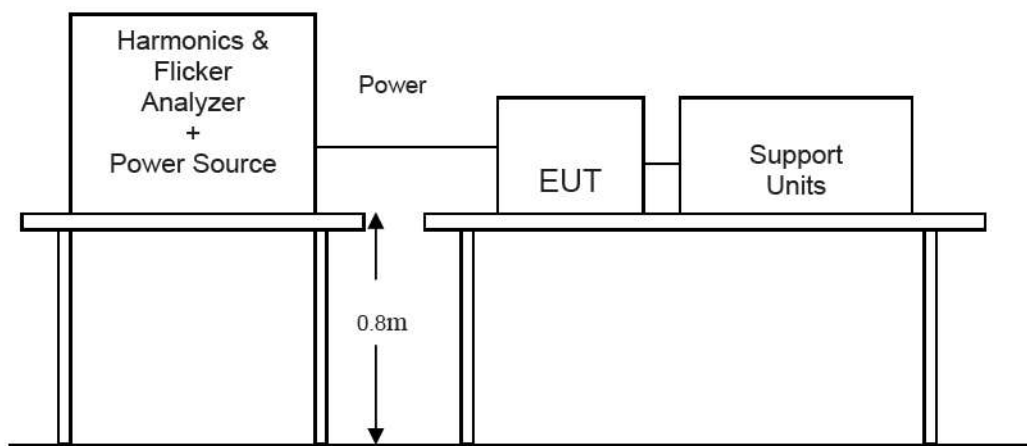

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 7.4.5. TEST RESULTS

Observation Period (Tp)	10mins	Test Mode	Normal operation
Environmental Conditions	23°C, 45 % RH, 1032 mbar	Tested By	Augn Huang
Tested Date	July 31, 2009		

### Test Result

Supply Voltage : 230.0 Vrms    327.9 Vpk    Frequency : 49.98 to 50.09 Hz

Load Current : 105.6 to 108.8 mArms 400 to 420 mApk Crest Factor: 3.843

Test Method: EN61000-3-3 +A1:2001

Highest Level: +0.09%

Lowest Level: -0.18%

d(max):	0.27%	PASS
---------	-------	------

Highest d(t) of 500ms: 0.00% PASS

Present d(t) over 3.33%: 0.00 Seconds

Longest d(t) over 3.33%: 0.00 Seconds

Highest Steady State: -0.03%

Lowest Steady State: -0.03%

Max d(c) Between Adjacent: 0.00% PASS

### Flicker Results :

Pst Classifier	Plt Calculation		
Duration	Flicker	Interval	Pst
0.1%	0.02	1:	0.09
0.7%	0.02	2:	0.09
1.0%	0.02	3:	0.09
1.5%	0.02	4:	0.09
2.2%	0.02	5:	0.09
3%	0.02	6:	0.09
4%	0.02	7:	0.09
6%	0.02	8:	0.09
8%	0.02	9:	0.09
10%	0.02	10:	0.09
13%	0.02	11:	0.09
17%	0.02	12:	0.09
30%	0.01		
50%	0.01		
80%	0.01	Plt =	0.00

## 8 IMMUNITY TEST

### 8.1. GENERAL DESCRIPTION

Product Standard	Test Type	Minimum Requirement
<b>Basic Standard, Specification, and Performance Criterion required</b>	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 ~1000 MHz, 10V/m, 1400 ~2000 MHz, 3V/m, 2000 ~2700 MHz, 1V/m, 80% AM(1kHz), Performance Criterion A
	IEC 61000-4-4	Electrical Fast Transient/Burst - EFT, Power line: 2kV, Performance Criterion B
	IEC 61000-4-5	Surge Immunity Test: 1.2/50 us Open Circuit Voltage, 8 /20 us Short Circuit Current, Power Port ~ Line to line: 1 kV Performance Criterion B
	IEC 61000-4-6	Conducted Radio Frequency Disturbances Test –CS: 0.15 ~ 80 MHz, 10Vrms, 80% AM, 1kHz, Performance Criterion A
	IEC 61000-4-8	Power frequency magnetic field immunity test 50/60Hz, 30A/m Performance Criterion A
	IEC 61000-4-11	<b>Voltage Dips:</b> i) >95% reduction for 0.5 period, Performance Criterion B ii) 60% reduction for 25 period, Performance Criterion C iii) 30% reduction for 25 period, Performance Criterion C <b>Voltage Interruptions:</b> >95% reduction for 250 period Performance Criterion C



**8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION**

<b>Criteria A:</b>	The apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
<b>Criteria B:</b>	<p>After test, the apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance.</p> <p>During the test, degradation of performance is however allowed. However, no change of operating state if stored data is allowed to persist after the test. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
<b>Criteria C:</b>	<p>Temporary loss of function is allowed, provided the functions is self-recoverable or can be restored by the operation of controls by the user in accordance with the manufacturer instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

**8.3. ELECTROSTATIC DISCHARGE (ESD)****8.3.1. TEST SPECIFICATION**

<b>Basic Standard:</b>	EN 61000-4-2
<b>Discharge Impedance:</b>	330 ohm / 150 pF
<b>Discharge Voltage:</b>	Air Discharge: 2 ; 4 ; 8 kV (Direct) Contact Discharge: 2 ; 4 kV (Direct/Indirect)
<b>Polarity:</b>	Positive & Negative
<b>Number of Discharge:</b>	10 Discharges / Sensitive Polarity for Air Discharge. 25 Discharges / Sensitive Polarity for Contact, HCP and VCP Discharge.
<b>Discharge Mode:</b>	Single Discharge 1 second minimum

**8.3.2. TEST INSTRUMENT**

IMMUNITY SHIELDED ROOM				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESD Simulator	NoiseKen	ESS-2002	ESS0523940	AUG. 20, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 8.3.3. TEST PROCEDURE

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and coupling planes:

The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the **Horizontal Coupling Plane (HCP)**. The remaining three test points shall each receive at least 50 direct contact discharges. If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

b) Air discharges at slots and apertures and insulating surfaces:


On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

- a) The EUT was located 0.1 m minimum from all side of the **HCP** (dimensions 1.6m x 0.8m).
- b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.
- c) The time interval between two successive single discharges was at least 1 second.
- d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each **HCP** opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the **HCP** and perpendicular to its front edge during the discharge.
- g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane (VCP)** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.



### 8.3.4. TEST SETUP

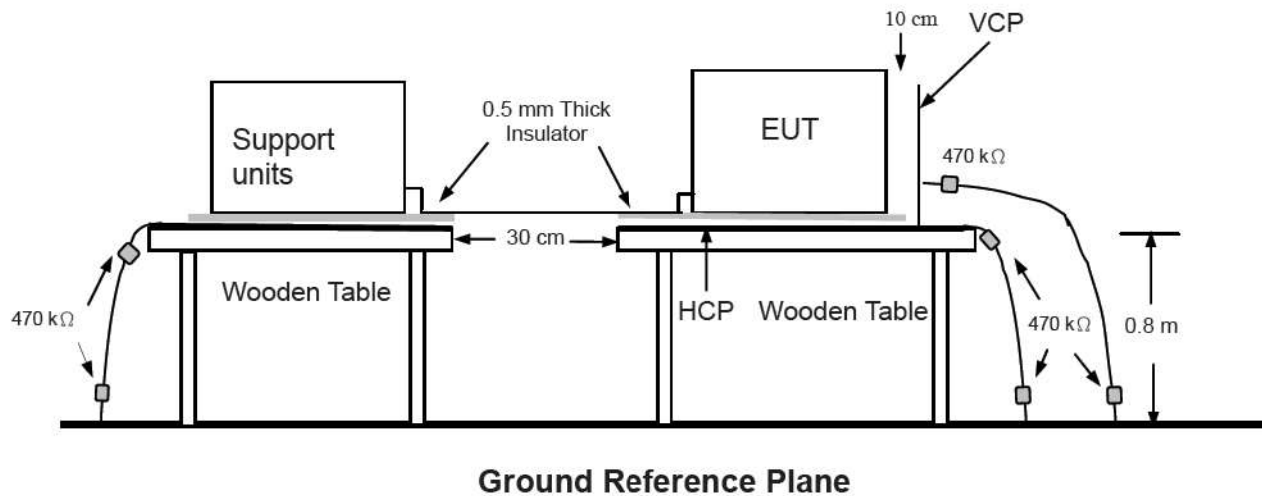

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

##### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5 mm thickness. A distance of 1 meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

##### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1 meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25 mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



**8.3.5. TEST RESULTS**

Temperature	23 °C	Humidity	45 % RH
Pressure	1032 mbar	Tested By	Agun Huang
Required Passing Performance		Criterion B	

Air Discharge							
Test Points	Test Levels			Results			
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3

Contact Discharge							
Test Points	Test Levels			Results			
	± 2 kV	± 4 kV	± 6 kV	Pass	Fail	Performance Criterion	Observation
N/A							

Please refer to ESD test photo on next page for detail discharge point



Discharge To Horizontal Coupling Plane							
Side of EUT	Test Levels			Results			
	± 2 kV	± 4 kV	± 6 kV	Pass	Fail	Performance Criterion	Observation
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3

Discharge To Vertical Coupling Plane							
Side of EUT	Test Levels			Results			
	± 2 kV	± 4 kV	± 6 kV	Pass	Fail	Performance Criterion	Observation
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3

**NOTE:**

1. The apparatus shall continue to operate as intended during and after the test.
2. The apparatus shall continue to operate as intended after the test.
3. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

**The Photo for Discharge Points of EUT**

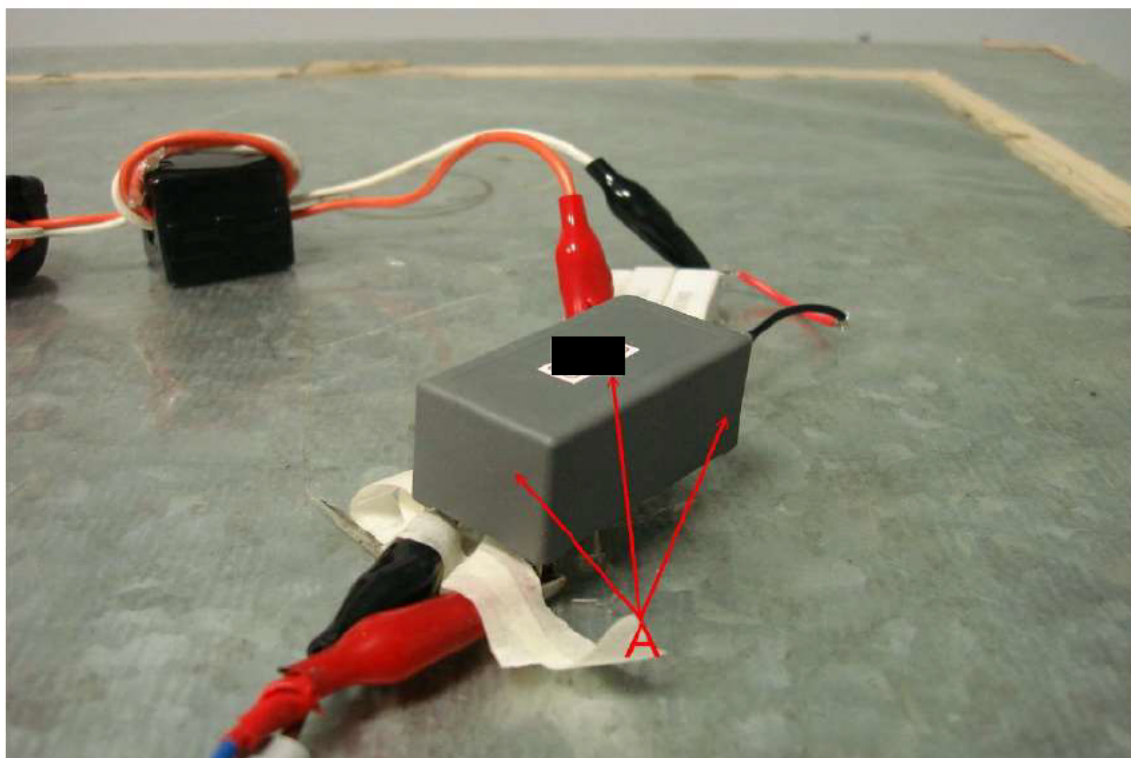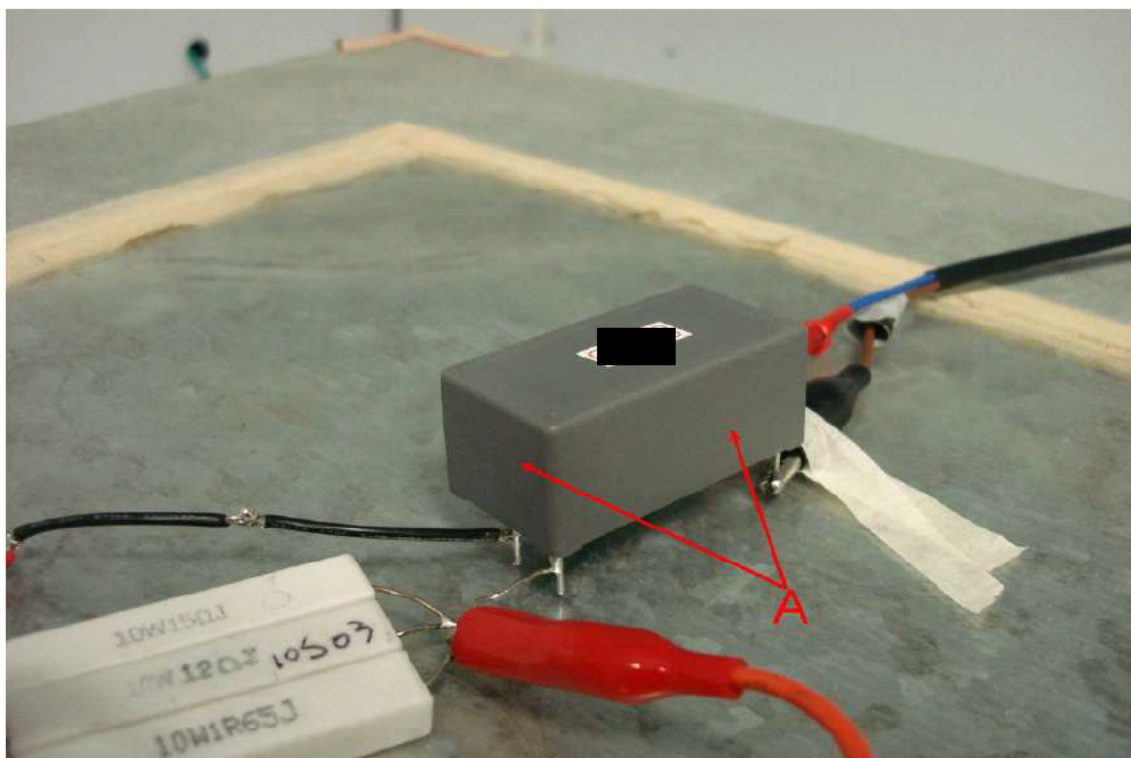

#### 8.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)

##### 8.4.1. TEST SPECIFICATION

**Basic Standard:** EN 61000-4-3

**Frequency Range/  
Field Strength** 80 ~1000 MHz, 10V/m,  
1400 ~2000 MHz, 3V/m,  
2000 ~2700 MHz, 1V/m,

**Modulation:** 1kHz Sine Wave, 80%, AM Modulation

**Frequency Step:** 1 % of preceding frequency value

**Polarity of Antenna:** Horizontal and Vertical

**Test Distance:** 3 m

**Antenna Height:** 1.5m

##### 8.4.2. TEST INSTRUMENT

RS Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Computer	SYNNEX	BTO -LMIW300 - GB	A41202-0031	N.C.R.
LCD Monitor	Acer	AL1715sm	ETL13071994430236 6RH01	N.C.R.
Keyboard	SYNNEX	5211A	G4430091266	N.C.R.
Amplifier Freq. Range :80MHz ~ 1GHz	AR	150W1000M3	310037	DEC. 04 , 2009
Amplifier Freq. Range :0.8MHz ~ 3GHz	AR	60S1G3M3	310102	DEC. 04 , 2009
RF TEST Controller Freq. Range :~18GHz	AR	SC1000M1	310126	DEC. 05 , 2009
Digital SIGNAL GENERATOR	HP	ESG-D3000A	US36260655	DEC. 29, 2009
RF Power Meter	BOONTON	4232A-01-02	122202	DEC. 30, 2009
Log – Periodic Antenna	AR	AT5080	309817	N.C.R.
RF Communications test set	HP	8920A	3412A04298	DEC. 22, 2009
Test S/W	RS SW1005 R1_4			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R.= No Calibration Required.




**8.4.3. TEST PROCEDURE**

The test procedure was in accordance with EN 61000-4-3

- a) The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- b) The frequency range is swept from 80 MHz to 2.7 GHz, with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed  $1.5 \times 10^{-3}$  decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.
- c) The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d) The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

#### 8.4.4. TEST SETUP

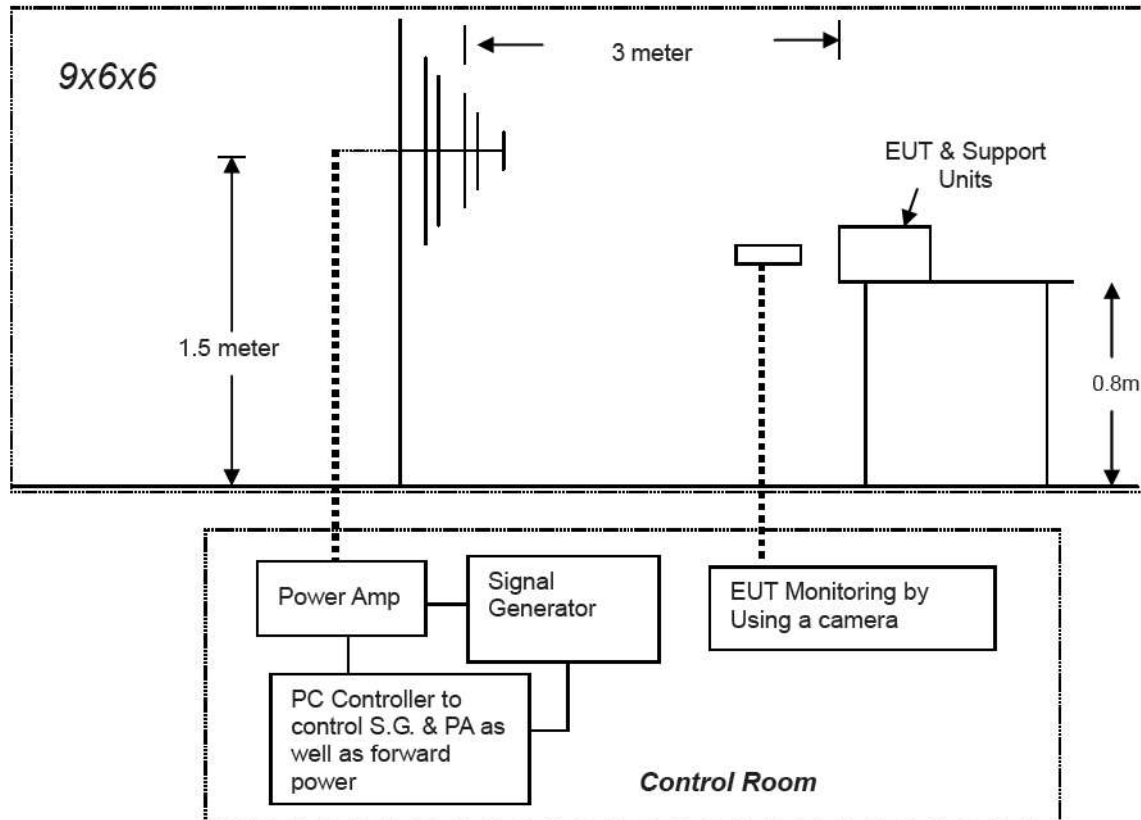

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

##### TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

##### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

**8.4.5. TEST RESULTS**

Temperature	26 °C	Humidity	52 % RH
Pressure	1032 mbar	Tested By	Agun Huang
Dwell Time	3 sec.		
Required Passing Performance	Criterion A		

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Observation	Result
80 ~ 1000	V&H	0	10	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
80 ~ 1000	V&H	90	10	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
80 ~ 1000	V&H	180	10	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
80 ~ 1000	V&H	270	10	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
1400 ~ 2000	V&H	0	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
1400 ~ 2000	V&H	90	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
1400 ~ 2000	V&H	180	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
1400 ~ 2000	V&H	270	3	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
2000 ~ 2700	V&H	0	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
2000 ~ 2700	V&H	90	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
2000 ~ 2700	V&H	180	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
2000 ~ 2700	V&H	270	1	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

**NOTE:**

1. The apparatus shall continue to operate as intended during and after the test.
2. The apparatus shall continue to operate as intended after the test.
3. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.



**8.5. ELECTRICAL FAST TRANSIENT (EFT)****8.5.1. TEST SPECIFICATION****Basic Standard:** EN 61000-4-4**Test Voltage:** Power Line: 2 kV**Polarity:** Positive & Negative**Repetition Rate:** 5 kHz**Impulse Wave-shape:** 5/50 ns**Burst Duration:** 15 ms / 300ms.**Burst Period:** 300 ms**Test Duration:** Not less than 1 min.**8.5.2. TEST INSTRUMENT**

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Computer	IBM	M/T 8183 - ICV	99BG137	N.C.R.
VGA Monitor	Acer	1555	917160230584200572P5C431	N.C.R.
Keyboard	HP	KB - 0133	B69360MGAPEOK5	N.C.R.
EMC Pro IMMUNITY TEST SYSTEM	KeyTek	EMCpro	0312231	DEC. 28, 2009
Test S/W	CE Ware 3.00b			


**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R.= No Calibration Required.

**8.5.3. TEST PROCEDURE**

- Both positive and negative polarity discharges were applied.
- The length of the "hot wire" from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

### 8.5.4. TEST SETUP

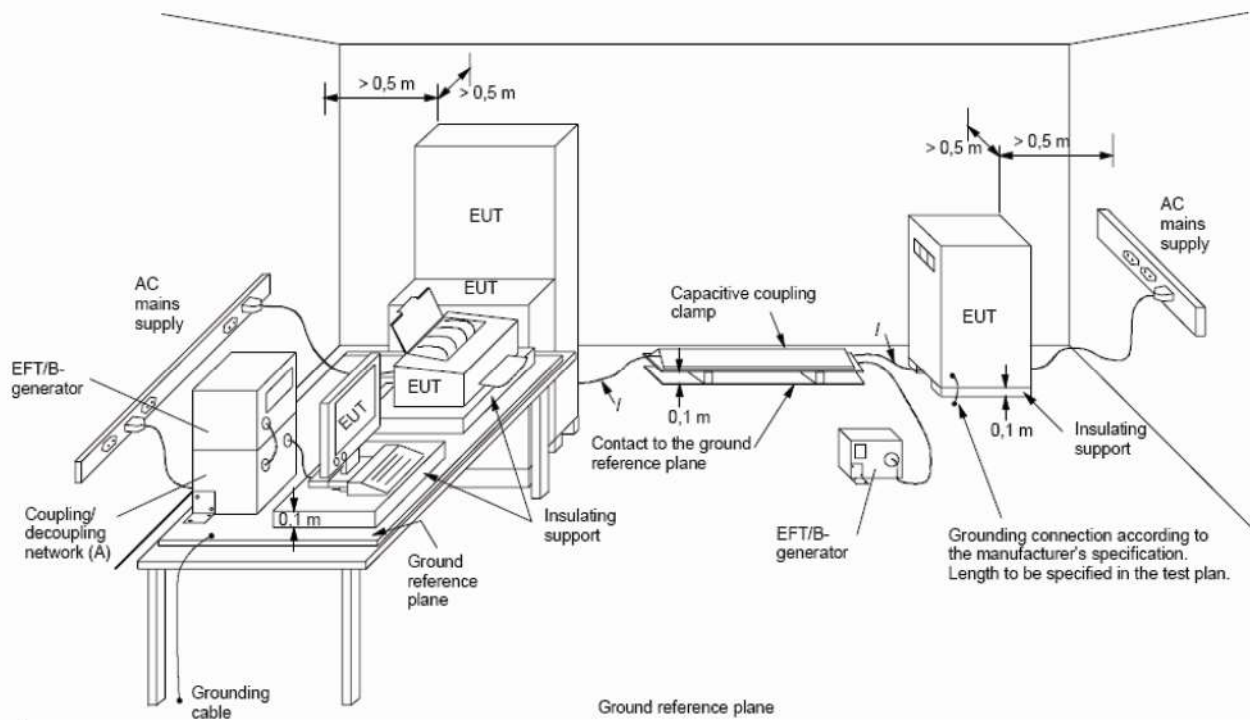

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

##### TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.8 m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system. A minimum distance of 0.5 m was provided between the EUT and the walls of the laboratory or any other metallic structure.

##### FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system.

**8.5.5. TEST RESULTS**

Temperature	25 °C	Humidity	52 % RH
Pressure	1032 mbar	Tested By	Agun Huang
Required Passing Performance		Criterion B	

**POWER**

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L	+/-	2kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
N	+/-	2kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
L+ N	+/-	2kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

**SIGNAL**

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
N/A					

**Characteristics of the fast transient/burst generator**

Burst duration	Burst Period	Repetition Rate	Rise time	Duration
15 ms <sup>+</sup> 20%	300 ms <sup>+</sup> 20%	5 kHz	5 ns <sup>+</sup> 30%	50 ns <sup>+</sup> 30%

**NOTE:**

1. The apparatus shall continue to operate as intended during and after the test.
2. The apparatus shall continue to operate as intended after the test.
3. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.



**8.6. SURGE IMMUNITY TEST****8.6.1. TEST SPECIFICATION**

<b>Basic Standard:</b>	EN 61000-4-5
<b>Wave-Shape:</b>	Combination Wave 1.2/50 us Open Circuit Voltage 8/20 us Short Circuit Current
<b>Test Voltage:</b>	Power line ~ line to line: 1 kV; line to ground: 2 kV
<b>Surge Input/Output:</b>	Power Line: L1-L2
<b>Generator Source Impedance:</b>	2 ohm between networks 12 ohm between network and ground
<b>Polarity:</b>	Positive/Negative
<b>Phase Angle:</b>	0 / 90 / 180 / 270
<b>Pulse Repetition Rate:</b>	30 sec
<b>Number of Tests:</b>	5 positive and 5 negative at selected points

**8.6.2. TEST INSTRUMENT**

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Computer	IBM	M/T 8183 - ICV	99BG137	N.C.R.
VGA Monitor	Acer	1555	917160230584200572P5C431	N.C.R.
Keyboard	HP	KB - 0133	B69360MGAPEOK5	N.C.R.
EMC Pro IMMUNITY TEST SYSTEM	KeyTek	EMCpro	0312231	DEC. 28, 2009
Test S/W	CE Ware 3.00b			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R.= No Calibration Required.

**8.6.3. TEST PROCEDURE****a) For EUT power supply:**


The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

**b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT:**

The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

**c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:**

The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

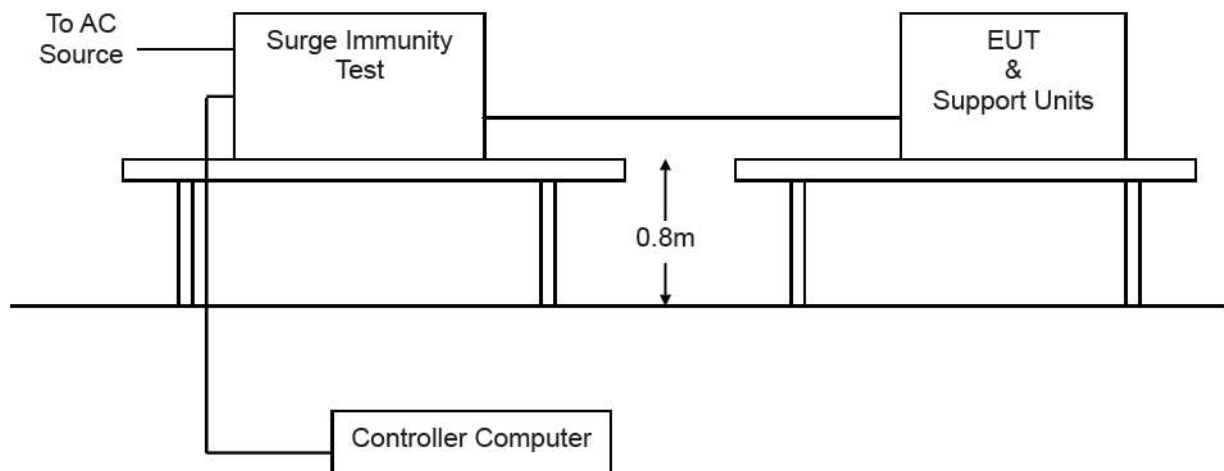**8.6.4. TEST SETUP**

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



**8.6.5. TEST RESULTS**

Temperature	25 °C	Humidity	52 % RH
Pressure	1032 mbar	Tested By	Agun Huang
Required Passing Performance		Criterion B	

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L -N	+/-	1kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

Phase shifting	Repetition Rate	Waveform parameter	Coupling Rate
0° 、 90° 、 180° 、 270°	30 sec	Combine Wave 1.2μs/50μs 8μs /20μs	5 times
		Impedance 2 Ω / 12 Ω	Each Angle and Polarity

**NOTE:**

1. The apparatus shall continue to operate as intended during and after the test.
2. The apparatus shall continue to operate as intended after the test.
3. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

**8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)****8.7.1. TEST SPECIFICATION**

<b>Basic Standard:</b>	EN 61000-4-6
<b>Frequency Range:</b>	0.15 MHz ~ 80 MHz
<b>Field Strength:</b>	10Vrms
<b>Modulation:</b>	1kHz Sine Wave, 80%, AM Modulation
<b>Frequency Step:</b>	1 % of preceding frequency value
<b>Coupled cable:</b>	Power Mains, Unshielded
<b>Coupling device:</b>	CDN-M2 (2 wires)

**8.7.2. TEST INSTRUMENT**

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Computer	HP	d330 uT	SGH3480LTH	N.C.R.
VGA Monitor	NEC	JC-1572VMA	6600645RA	N.C.R.
Keyboard	IBM	KB - 8923	1021424	N.C.R.
CS Frankonia EMVMess-System Gmbh	FRANKONIA	CIT-10/75	102C3220	SEP. 23,2009
FCC Coupling Decoupling Network Freq. range : 150KHz~230MHz	FRANKONIA	CDN M2+M3	A3011095	JAN. 20, 2010
FCC EM Injection Clamp	-----	F-203I-23mm	449	NOV. 30, 2009
Test S/W	CS-EN61000-4-6			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R.= No Calibration Required.



### **8.7.3. TEST PROCEDURE**

The EUT shall be tested within its intended operating and climatic conditions.

The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.


The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was  $1.5 \times 10^{-3}$  decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts were made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.



#### 8.7.4. TEST SETUP

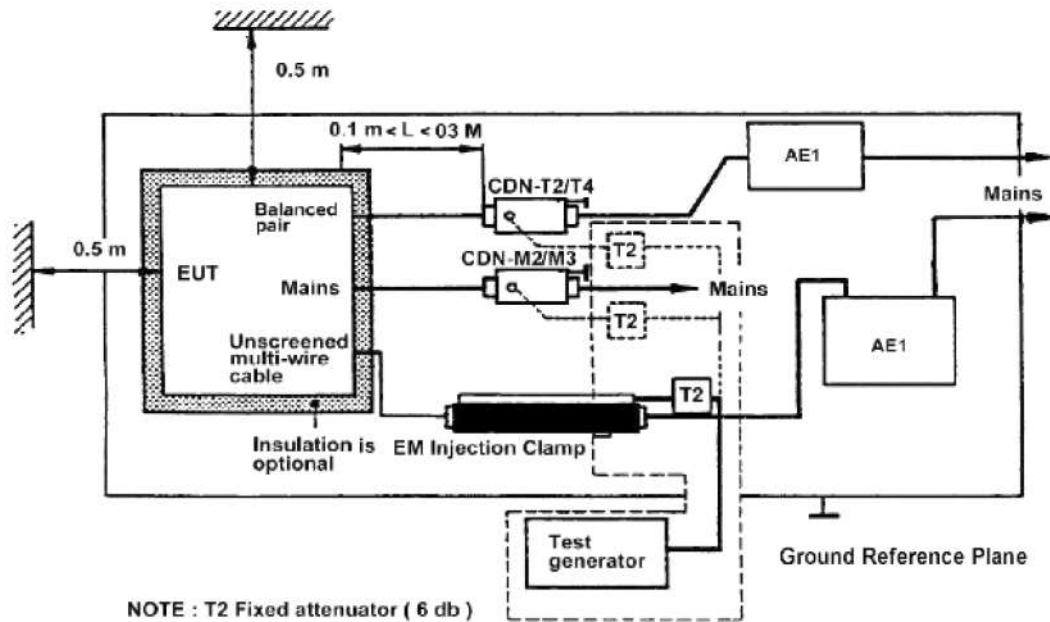

- Note:** 1. The EUT is setup 0.1m above Ground Reference Plane  
2. The CDNs and / or EM clamp used for real test depends on ports and cables configuration of EUT.

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### **NOTE:**

##### TABLE-TOP AND FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

**8.7.5. TEST RESULTS**

Temperature	25 °C	Humidity	56% RH
Pressure	1032 mbar	Tested By	Agun Huang
Required Passing Performance		Criterion A	

**POWER**

Frequency Band (MHz)	Field Strength (Vrms)	Cable	Injection Method	Performance Criterion	Observation	Result
0.15 ~ 80	10	Power Cord	CDN- <input checked="" type="checkbox"/> M2 <input type="checkbox"/> M3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

**SIGNAL**

Frequency Band (MHz)	Field Strength (Vrms)	Cable	Injection Method	Performance Criterion	Observation	Result
N/A						

**NOTE:**

1. The apparatus shall continue to operate as intended during and after the test.
2. The apparatus shall continue to operate as intended after the test.
3. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

**8.8. POWER FREQUENCY MAGNETIC FIELD****8.8.1. TEST SPECIFICATION****Basic Standard:** EN 61000-4-8**Frequency Range:** 50 Hz / 60Hz**Field Strength:** 30 A/m**Observation Time:** 1 minute**Inductance Coil:** Rectangular type, 1mx1m**8.8.2. TEST INSTRUMENT**

Power Frequency Magnetic Field Immunity Test (IEC/EN 61000-4-8)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Frequency Magnetic Field	Schaffner	MFO 6501	154	JAN 19, 2010
Power Frequency Magnetic Field	Schaffner	INA 702	158	OCT. 04, 2009


**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R.= No Calibration Required.

**8.8.3. TEST PROCEDURE**

- The equipment is configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.
- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.



#### 8.8.4. TEST SETUP

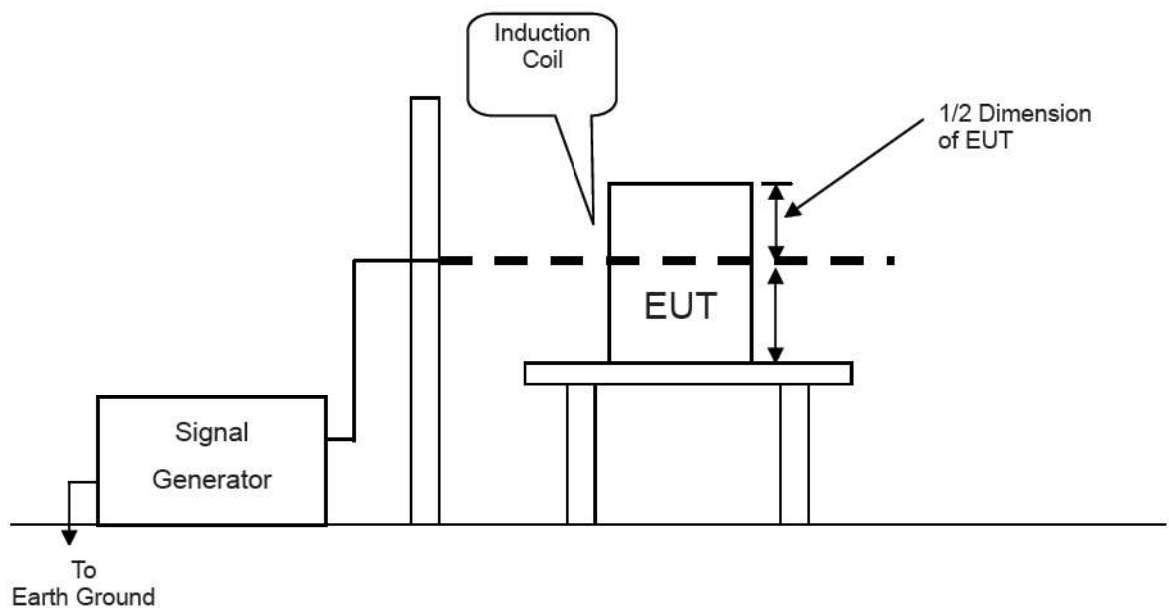

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### NOTE:

##### TABLETOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

##### FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

**8.8.5. TEST RESULTS**

Temperature	25 °C	Humidity	56% RH
Pressure	1032 mbar	Tested By	Agun Huang
Required Passing Performance		Criterion A	

Power Frequency	50Hz			
Direction	Field Strength A/m	Performance Criterion	Observation	Result
X axis	30	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
Y axis	30	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
Z axis	30	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

**NOTE:**

1. Performance criteria A for immunity tests with phenomena of a continuous nature.
2. Performance criteria B for immunity test with phenomena of a transient nature.
3. Performance criteria C for immunity test with power interruptions, function loss and voltage dips exceeding a certain period of time.

## 8.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS

### 8.9.1. TEST SPECIFICATION

**Basic Standard:** EN 61000-4-11

**Test duration time:** Minimum three test events in sequence

**Interval between event:** Minimum 10 seconds

**Phase Angle:** 0 / 45 / 90 / 135 / 180 / 225 / 270 / 315 / 360

**Test cycle:** Voltage Dips:

- i) >95% reduction for 1 period,  
Performance Criterion B
- ii) 60% reduction for 10 & 25 period,  
Performance Criterion C
- iii) 30% reduction for 12 & 30 period,  
Performance Criterion C

Voltage Interruptions:

- >95% reduction for 250 & 300 periods  
Performance Criterion C


### 8.9.2. TEST INSTRUMENT

Immunity shielded room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Computer	IBM	M/T 8183 - ICV	99BG137	N.C.R.
VGA Monitor	Acer	1555	917160230584200572P5C431	N.C.R.
Keyboard	HP	KB - 0133	B69360MGAPEOK5	N.C.R.
EMC Pro IMMUNITY TEST SYSTEM	KeyTek	EMCpro	0312231	DEC. 28, 2009
Test S/W	CE Ware 3.00b			

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R.= No Calibration Required

### 8.1.1 TEST PROCEDURE

- a) The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
- b) Setting the parameter of tests and then perform the test software of test simulator.
- c) Conditions changes to occur at 0 degree crossover point of the voltage waveform.
- d) Recording the test result in test record form.

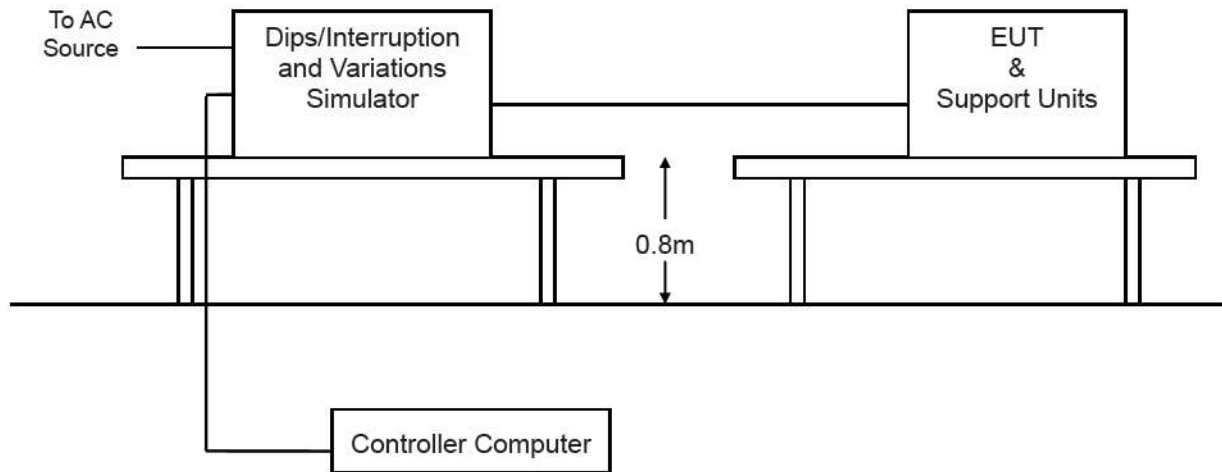**8.9.3.TEST SETUP**

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



**8.9.4.TEST RESULTS**

Temperature	25 °C	Humidity	52 % RH
Pressure	1032 mbar	Tested By	Agun Huang
Required Passing Performance	Criterion B: >95% reduction 1 period Criterion C: 60% reduction 10 period & 30% reduction 12 period & 60% reduction 25 period & 30% reduction 30 period & >95% reduction 250 period & >95% reduction 300 period		

Test Power: 230Vac, 50Hz				
Voltage (% Reduction)	Duration (Period)	Performance Criterion	Observation	Test Result
>95	1	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

Test Power: 230Vac, 50/60Hz				
Voltage (% Reduction)	Duration (Period)	Performance Criterion	Observation	Test Result
60	10	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
60	12	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

Test Power: 230Vac, 50/60Hz				
Voltage (% Reduction)	Duration (Period)	Performance Criterion	Observation	Test Result
30	25	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS
30	30	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3	A PASS

Test Power: 230Vac, 50/60Hz				
Voltage (% Reduction)	Duration (Period)	Performance Criterion	Observation	Test Result
>95	250	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B PASS
>95	300	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	B PASS

**NOTE:**



1. The apparatus shall continue to operate as intended during and after the test.
2. The apparatus shall continue to operate as intended after the test.
3. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

## 9 PHOTOGRAPHS OF THE TEST CONFIGURATION


### CONDUCTED EMISSION TEST




**RADIATED EMISSION TEST**

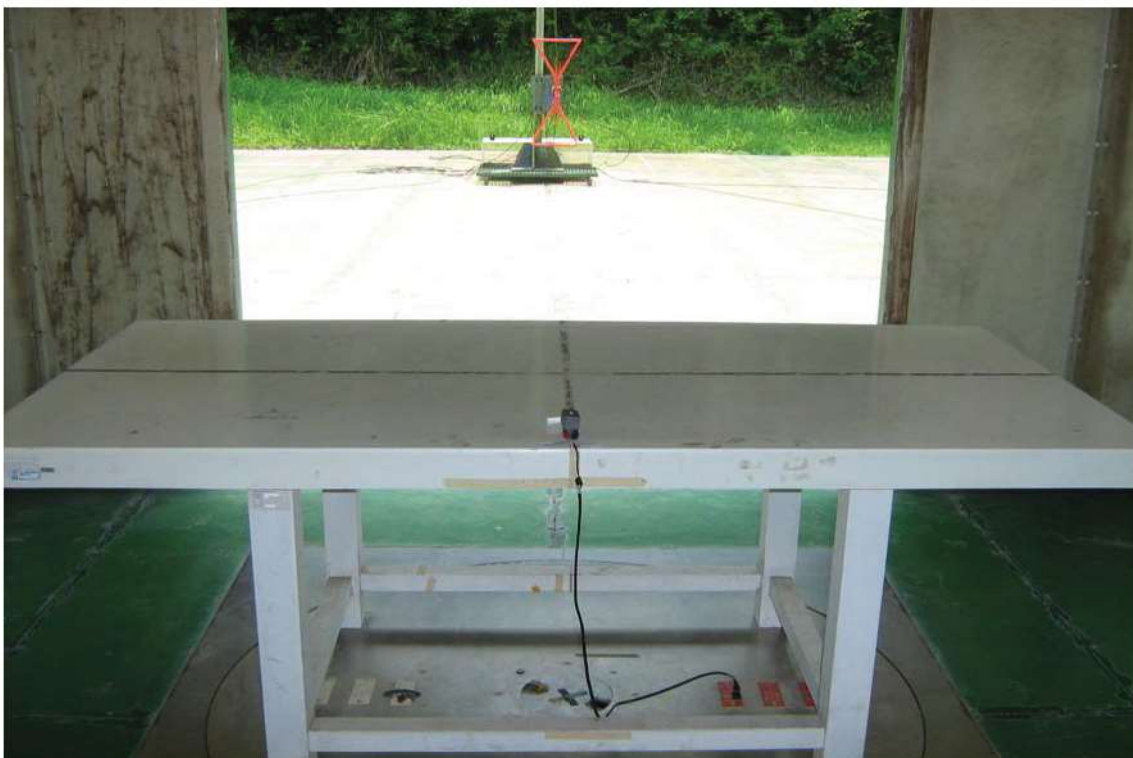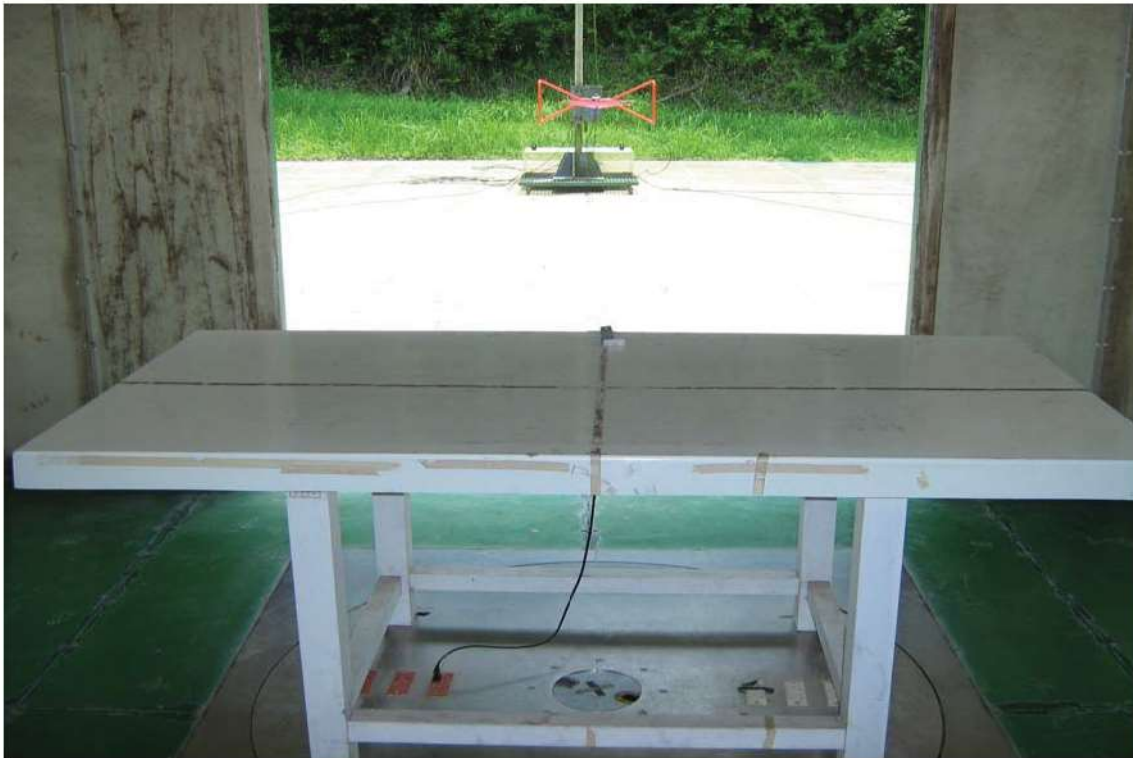


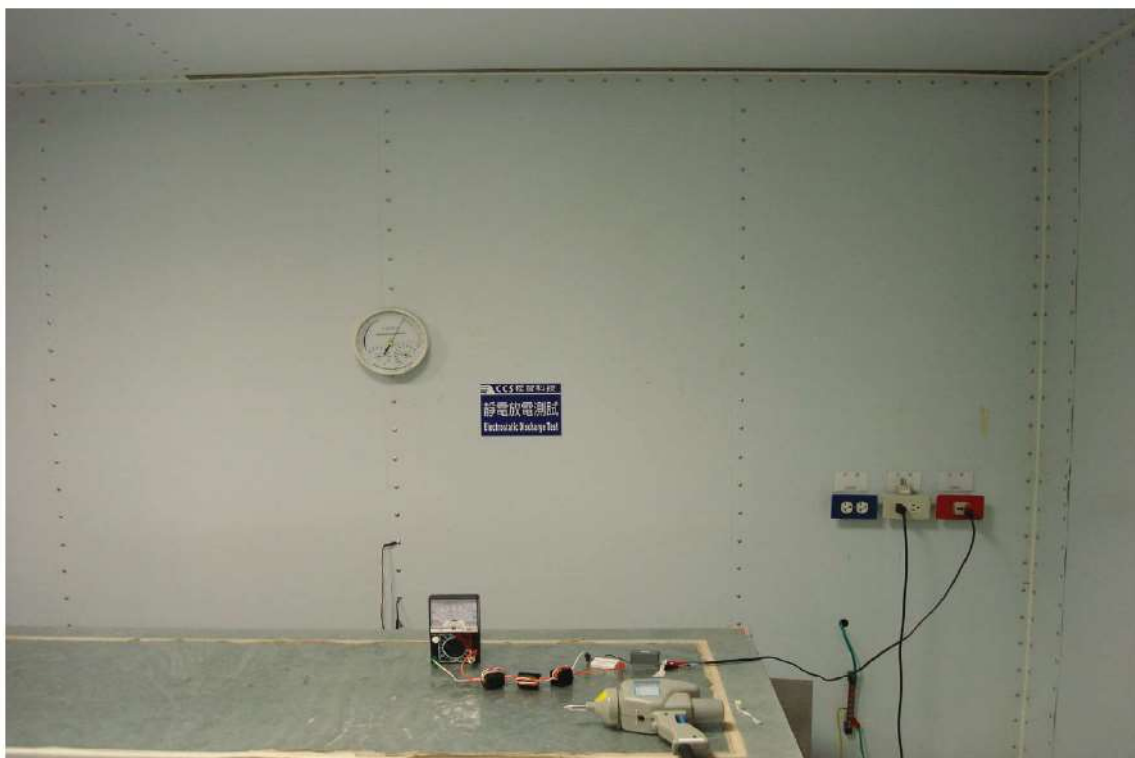


**FLICK TEST****ESD TEST**

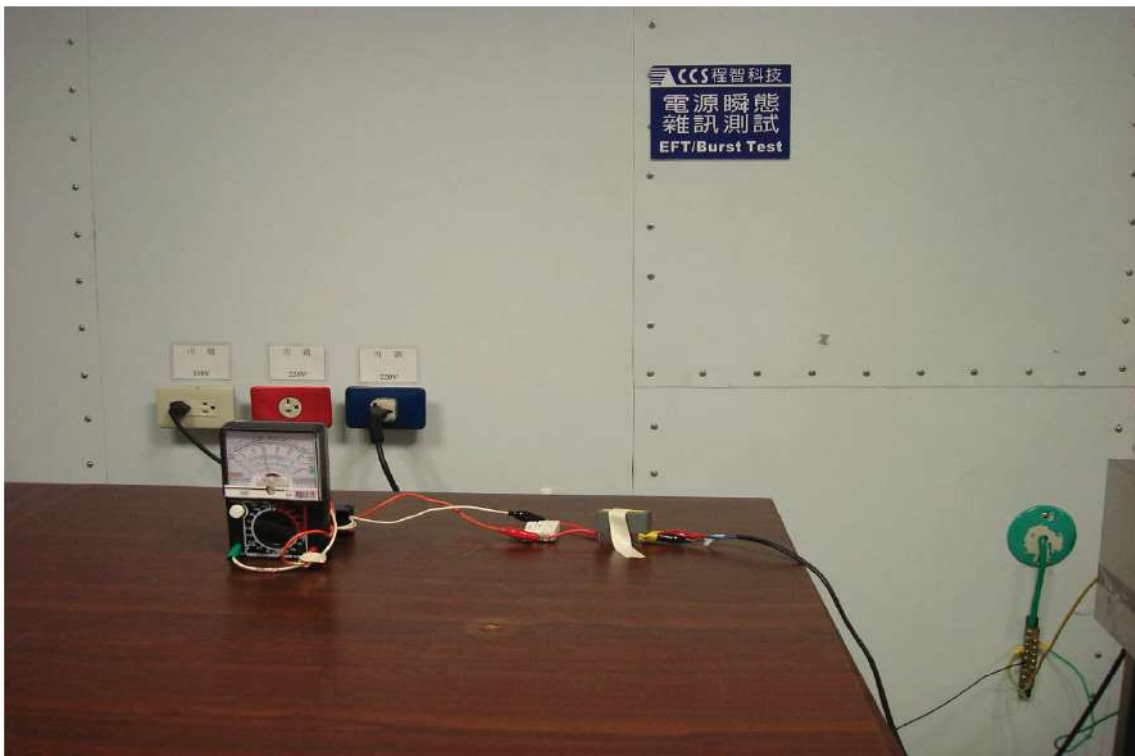

**RS TEST****EFT TEST**

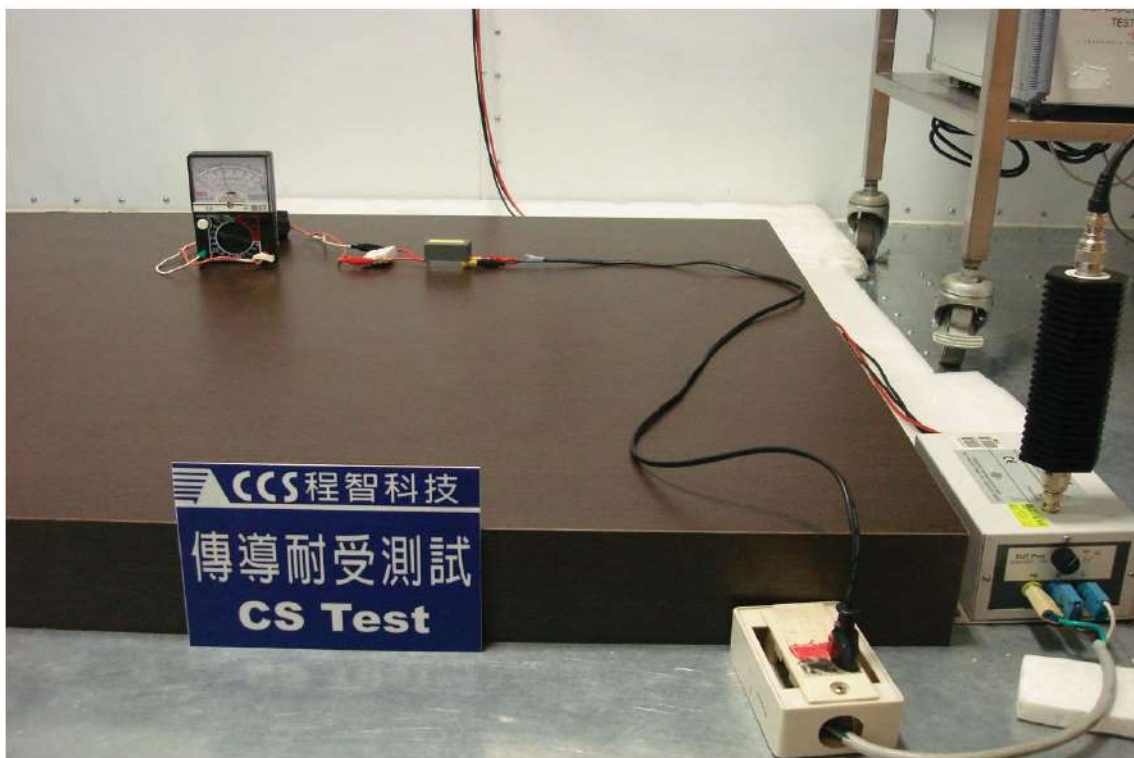**SURGE TEST****CS TEST**

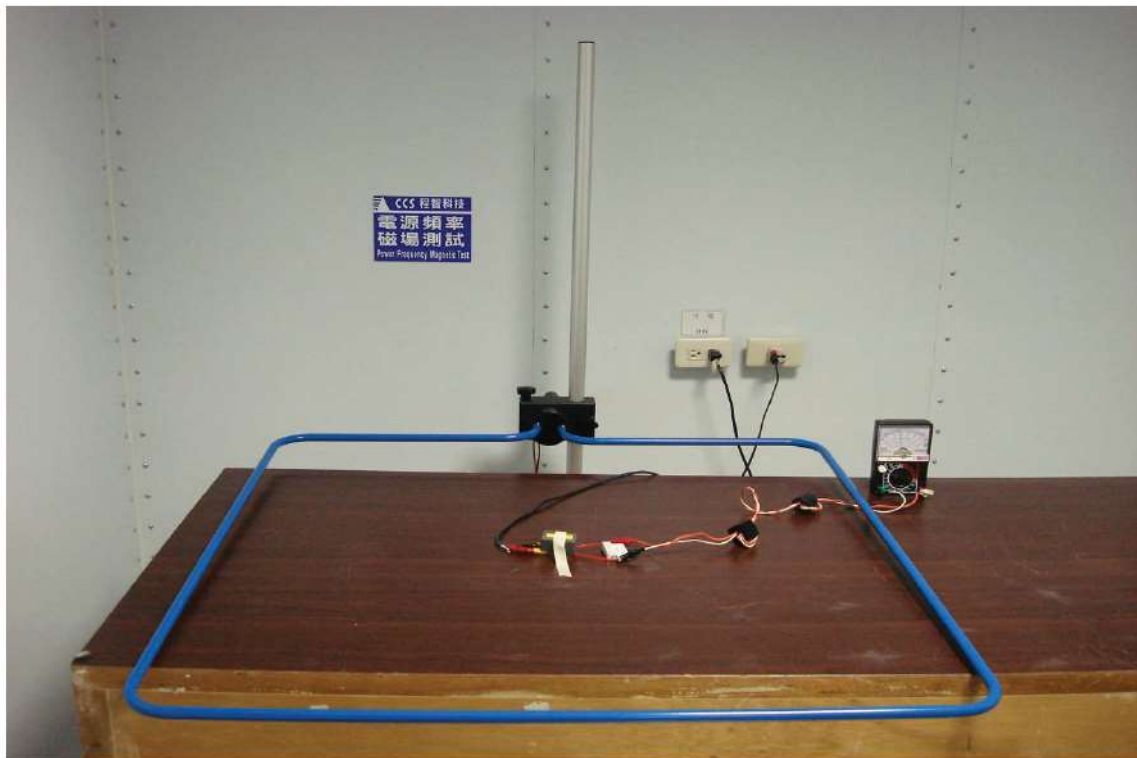**PFMF TEST****VOLTAGE DIP TEST****END OF REPORT**