



Characteristic Curves

TMM 60105 TMM 60105C


Efficiency vs Output Load

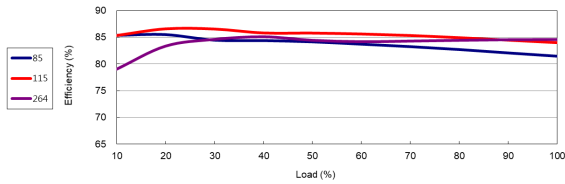


Efficiency vs Input Voltage

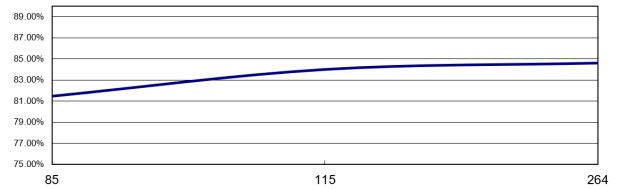


Derating Output Load versus Ambient Temperature

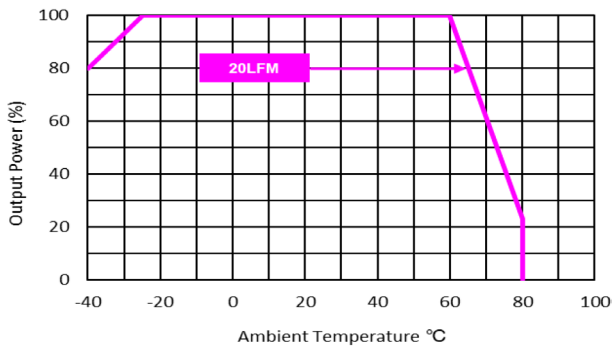


Typical Output Ripple and Noise

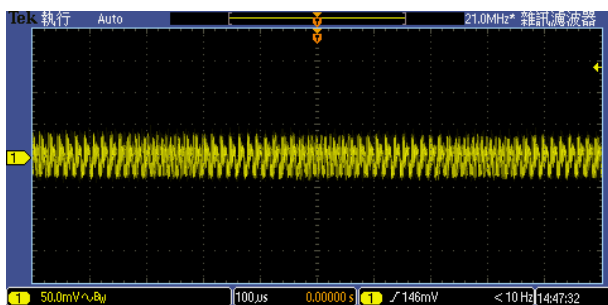

Transient Response to Dynamic Load Change (25%)

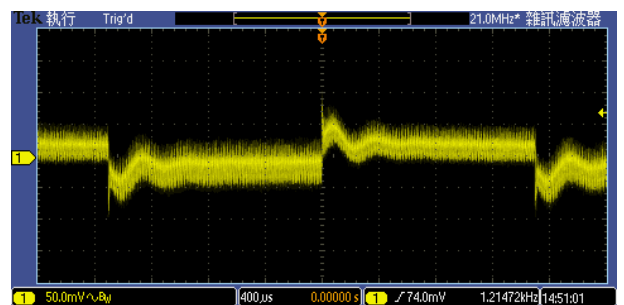


Typical Input Start-Up and Output Rise Characteristic

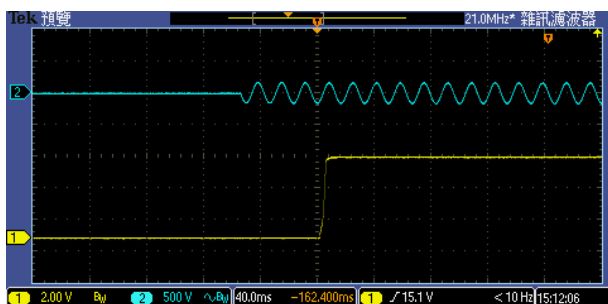


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 60112 TMM 60112C


Efficiency vs Output Load

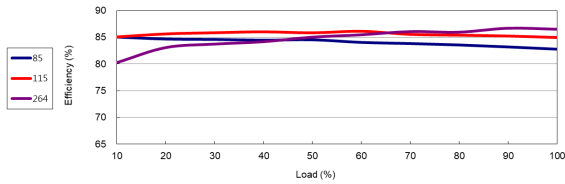


Efficiency vs Input Voltage

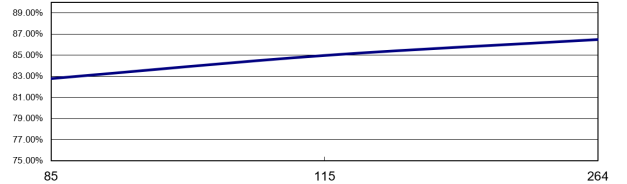


Derating Output Load versus Ambient Temperature

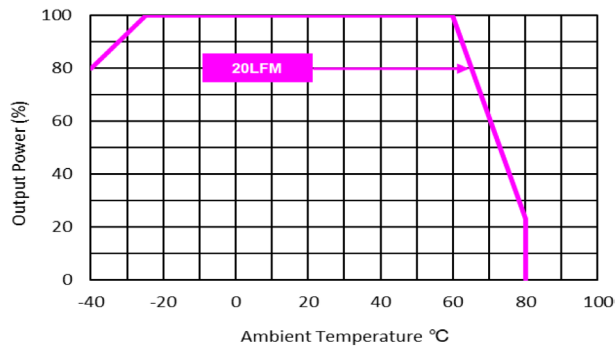


Typical Output Ripple and Noise

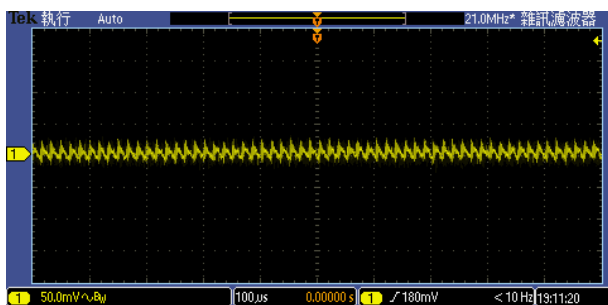

Transient Response to Dynamic Load Change (25%)

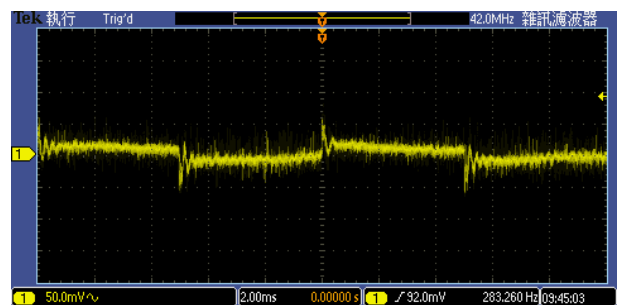


Typical Input Start-Up and Output Rise Characteristic

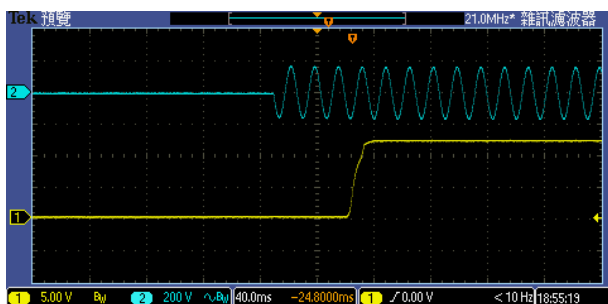


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 60115 TMM 60115C


Efficiency vs Output Load

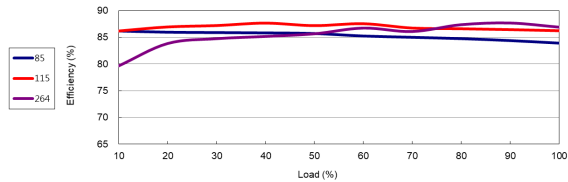


Efficiency vs Input Voltage

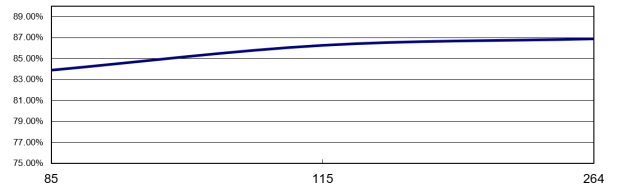


Derating Output Load versus Ambient Temperature

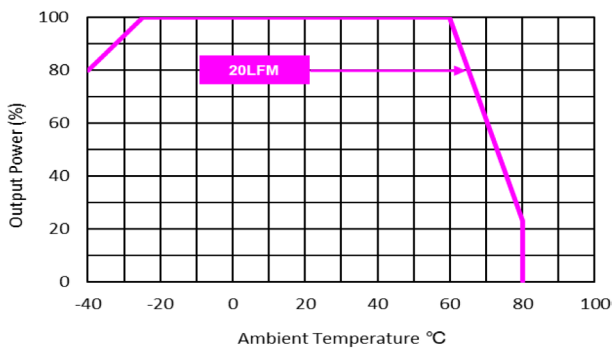


Typical Output Ripple and Noise

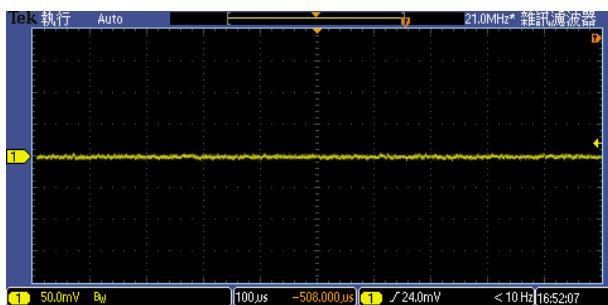

Transient Response to Dynamic Load Change (25%)

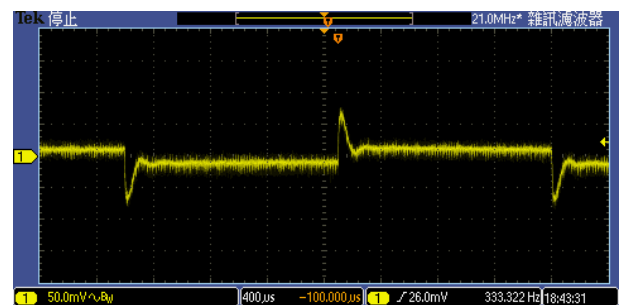


Typical Input Start-Up and Output Rise Characteristic

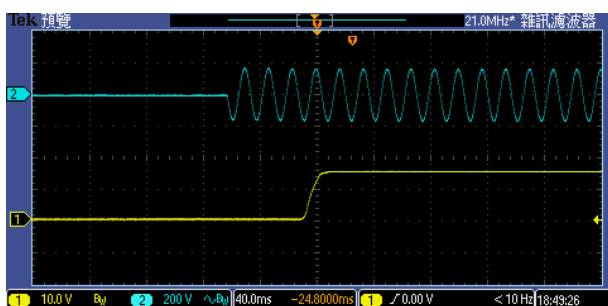


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 60124 TMM 60124C


Efficiency vs Output Load

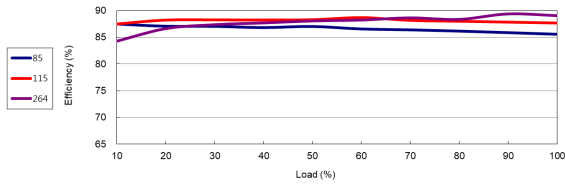


Efficiency vs Input Voltage

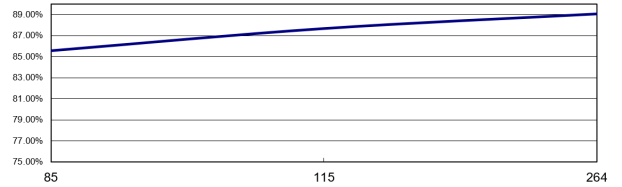


Derating Output Load versus Ambient Temperature

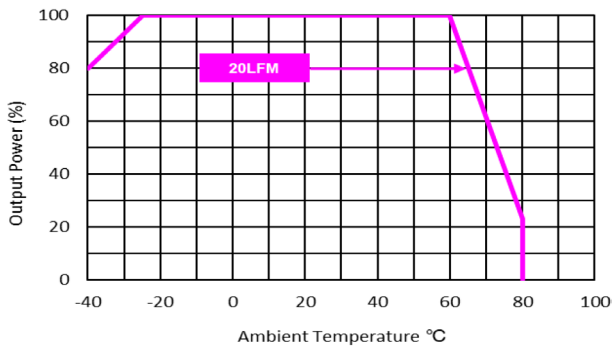


Typical Output Ripple and Noise

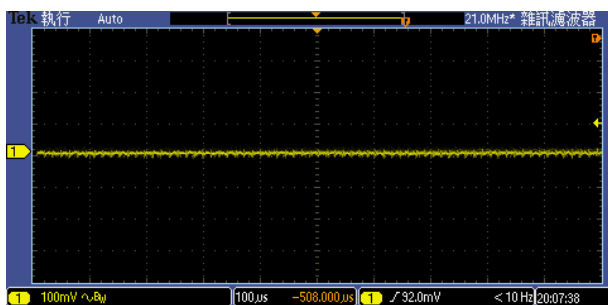

Transient Response to Dynamic Load Change (25%)

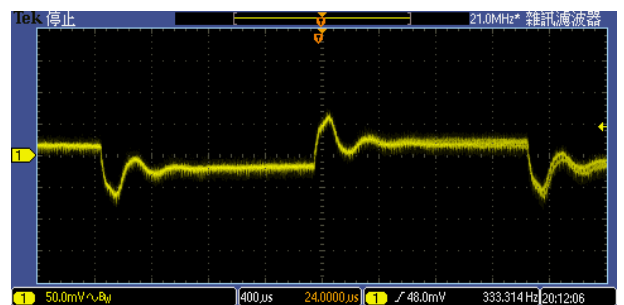


Typical Input Start-Up and Output Rise Characteristic

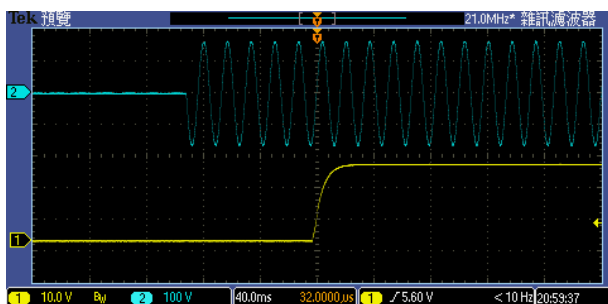


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 60148
TMM 60148C


Efficiency vs Output Load

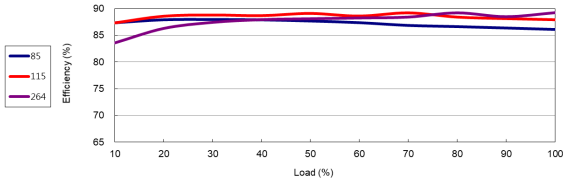


Efficiency vs Input Voltage

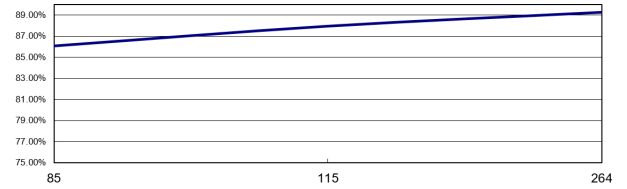


Derating Output Load versus Ambient Temperature

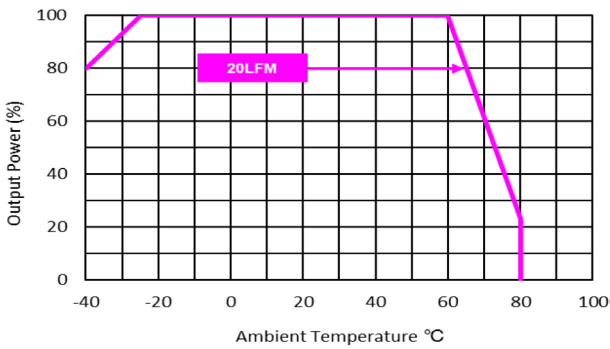


Typical Output Ripple and Noise

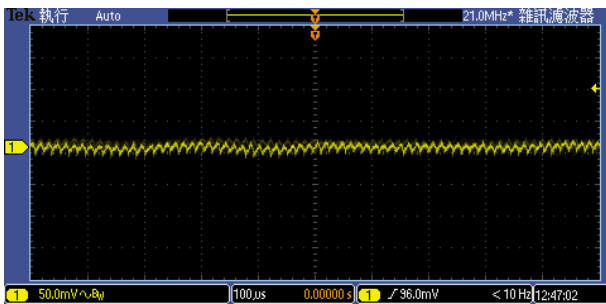

Transient Response to Dynamic Load Change (25%)

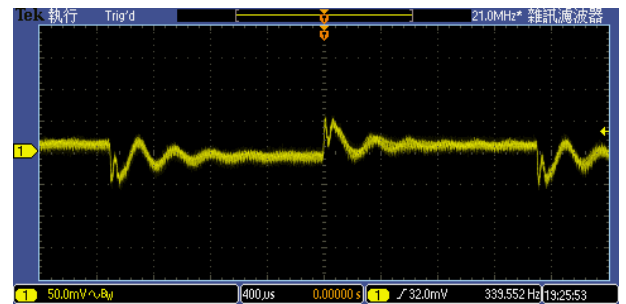

Typical Input Start-Up and Output Rise Characteristic

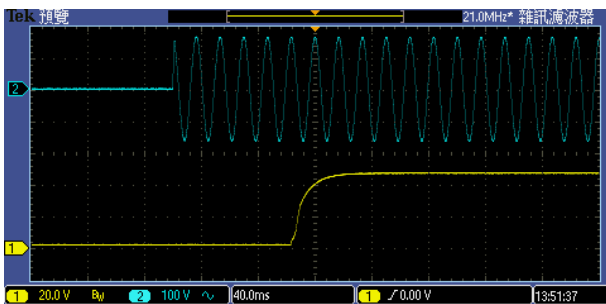

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.