



Characteristic Curves

TXLN 200-105


Efficiency versus Output Load

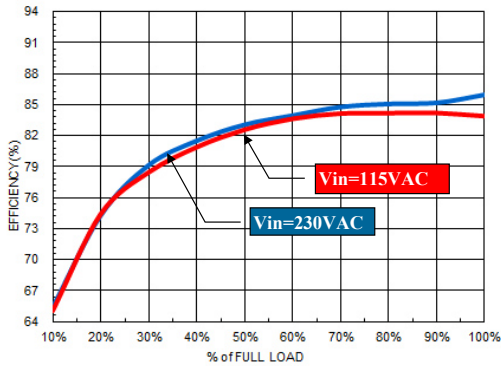


Efficiency versus Input Voltage

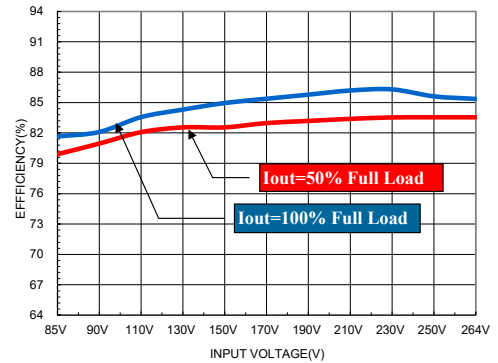


Derating Output Load versus Ambient Temperature

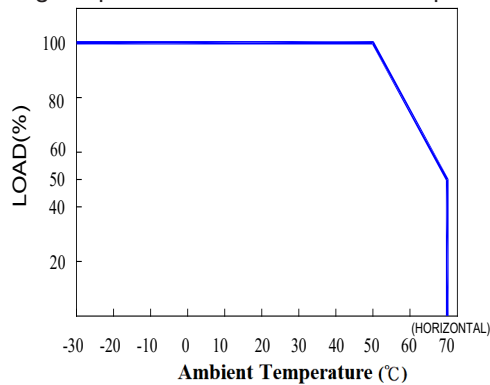


Derating Output Load versus Input Voltage

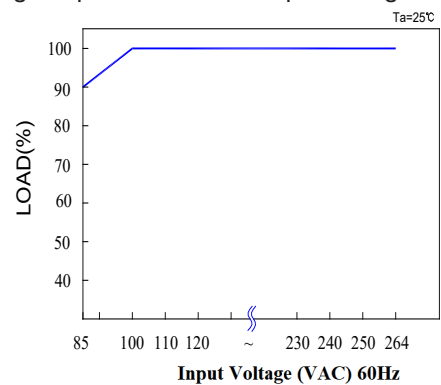


Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

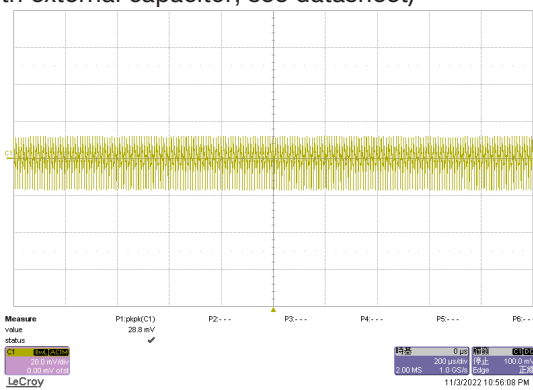


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

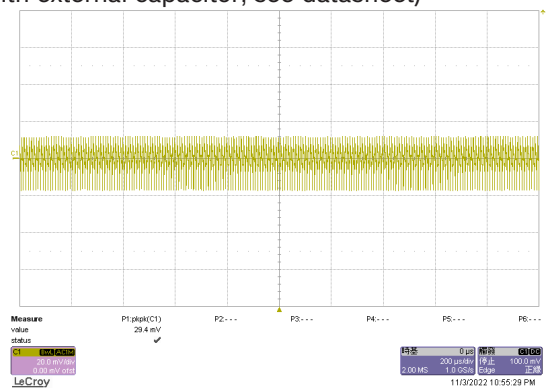

Transient Response to Dynamic Load Change (25%) at 115 Vin

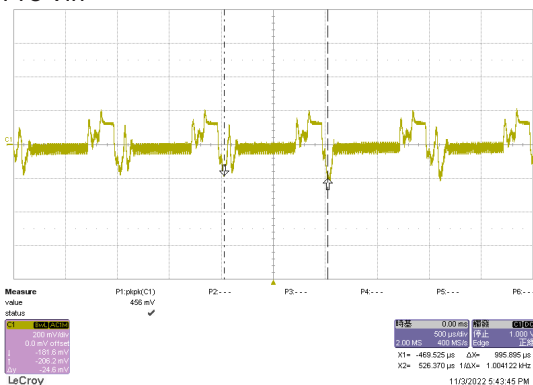


Transient Response to Dynamic Load Change (25%) at 230 Vin

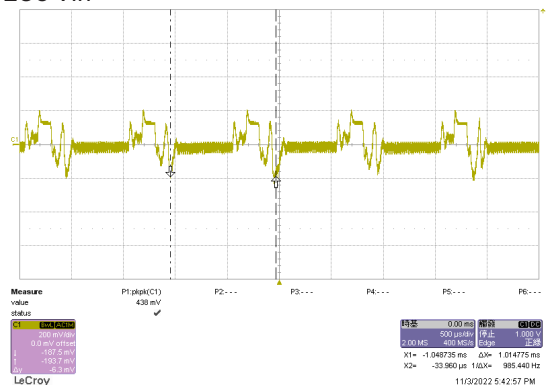


TXLN 200-112


Efficiency versus Output Load

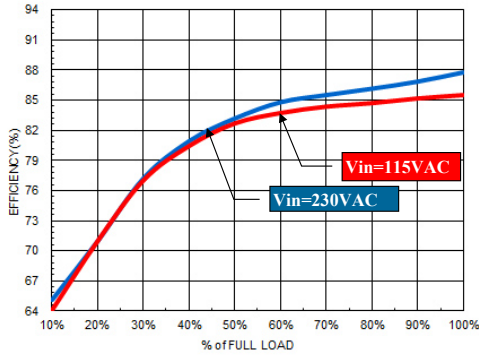


Efficiency versus Input Voltage

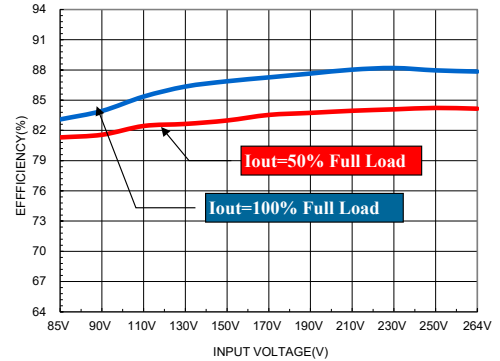


Derating Output Load versus Ambient Temperature

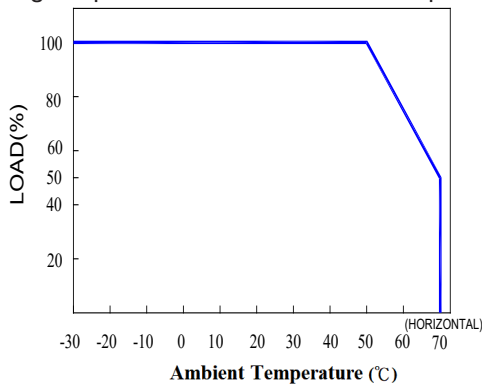


Derating Output Load versus Input Voltage

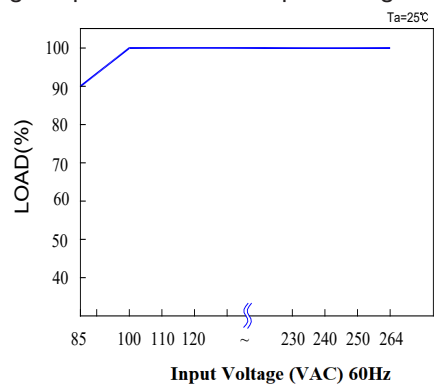


Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

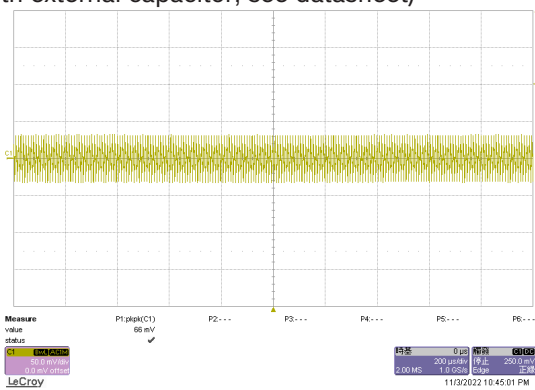


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

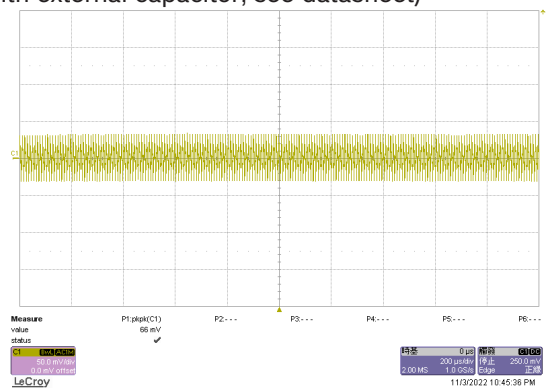

Transient Response to Dynamic Load Change (25%) at 115 Vin

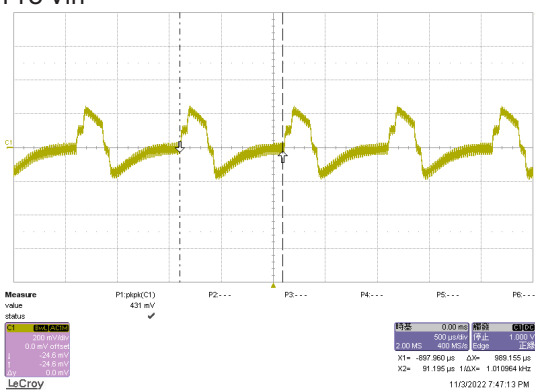


Transient Response to Dynamic Load Change (25%) at 230 Vin

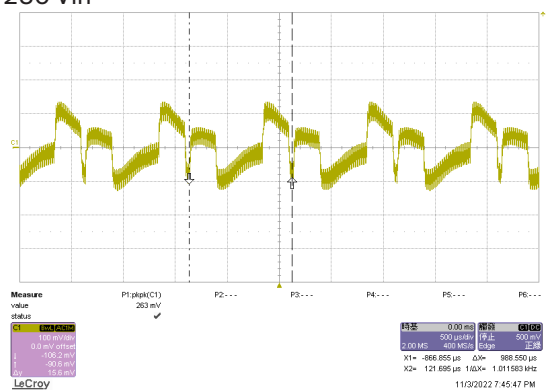


TXLN 200-124


Efficiency versus Output Load

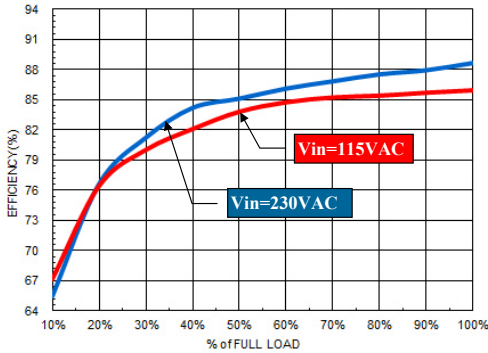


Efficiency versus Input Voltage

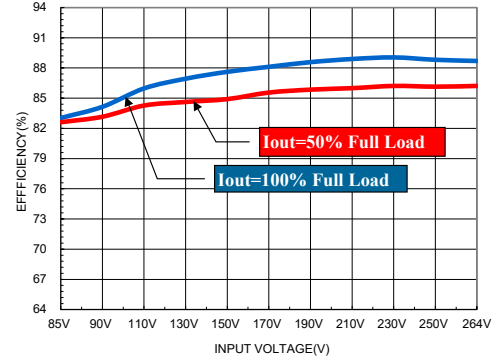


Derating Output Load versus Ambient Temperature

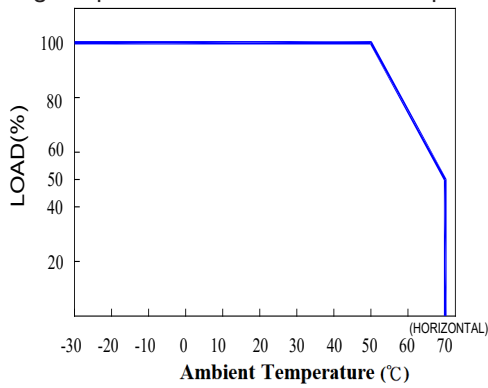


Derating Output Load versus Input Voltage

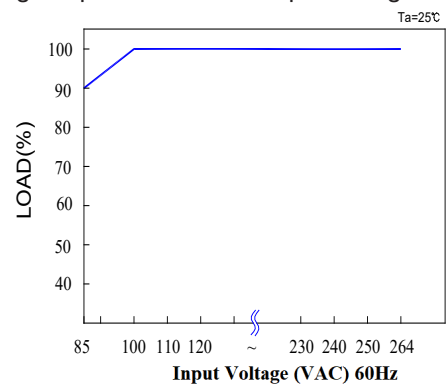


Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

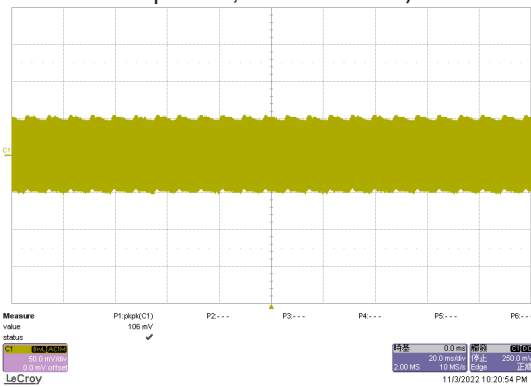


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

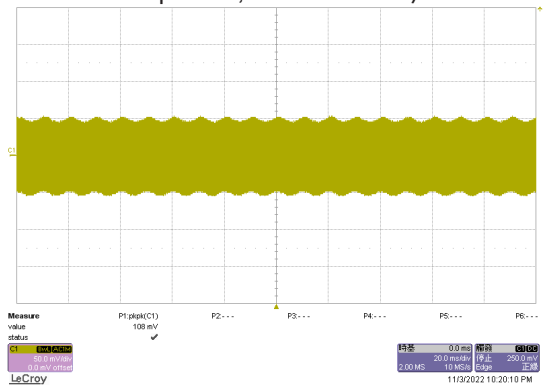

Transient Response to Dynamic Load Change (25%) at 115 Vin

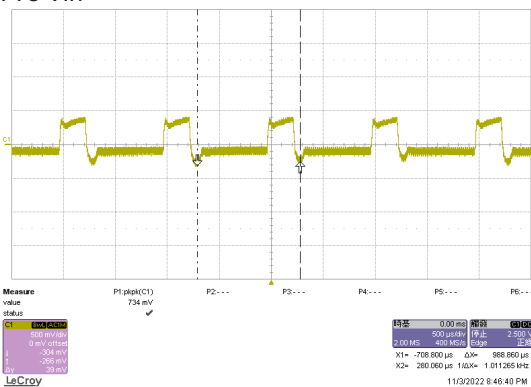


Transient Response to Dynamic Load Change (25%) at 230 Vin

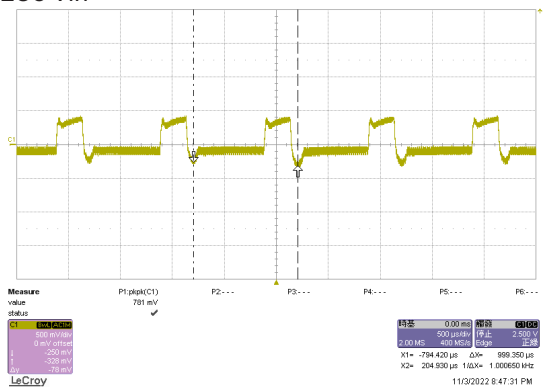


TXLN 200-124

Typical Start-Up Characteristic at 115 Vin

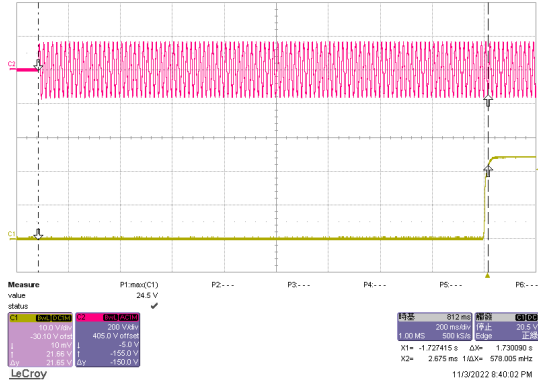


Typical Start-Up Characteristic at 230 Vin

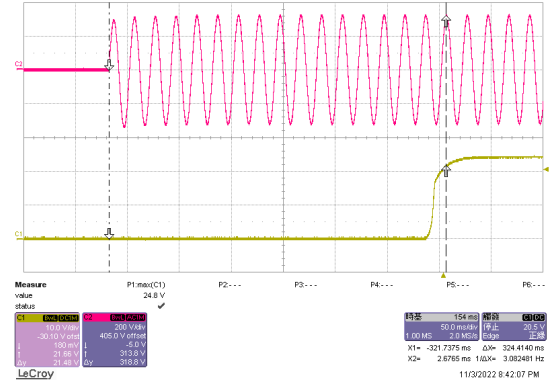


On demand model with 36 Vout


Efficiency versus Output Load

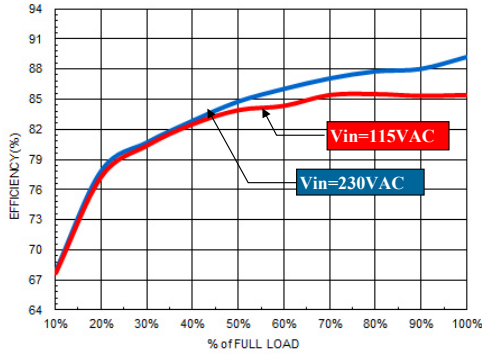


Efficiency versus Input Voltage

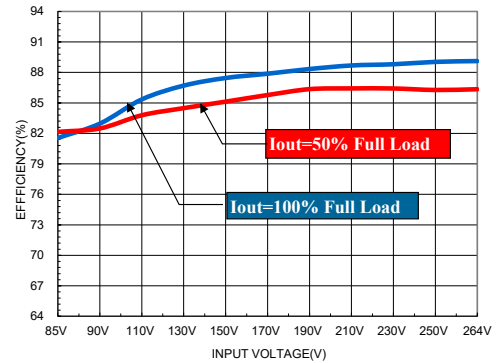


Derating Output Load versus Ambient Temperature

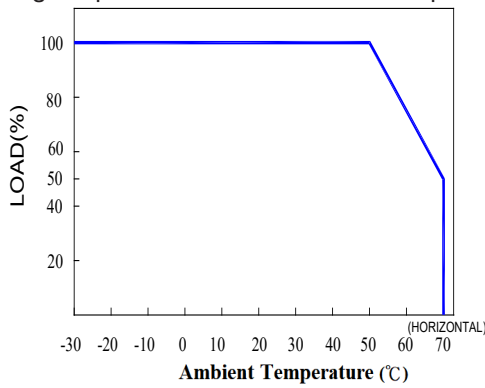


Derating Output Load versus Input Voltage

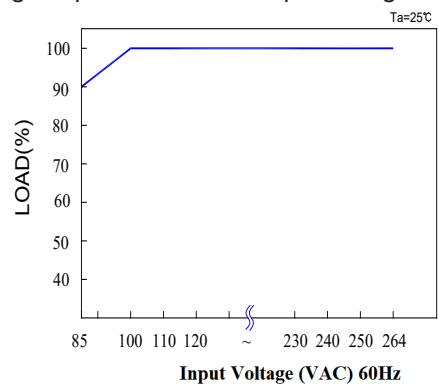


Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

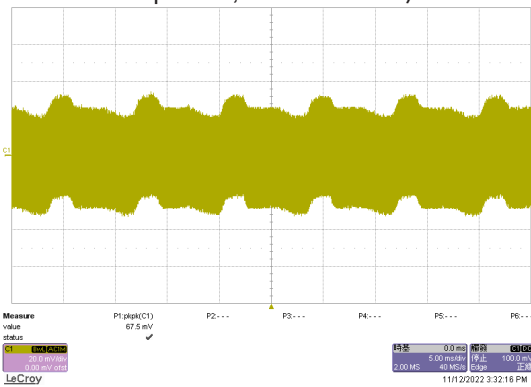


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

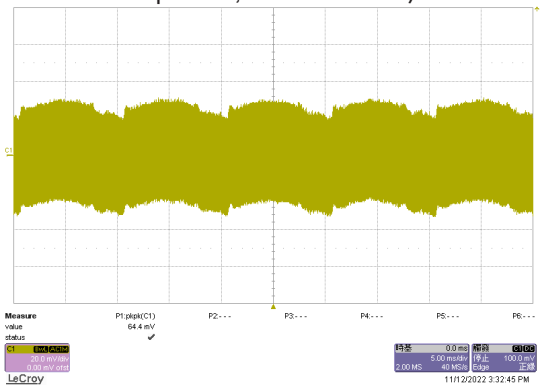

Transient Response to Dynamic Load Change (25%) at 115 Vin

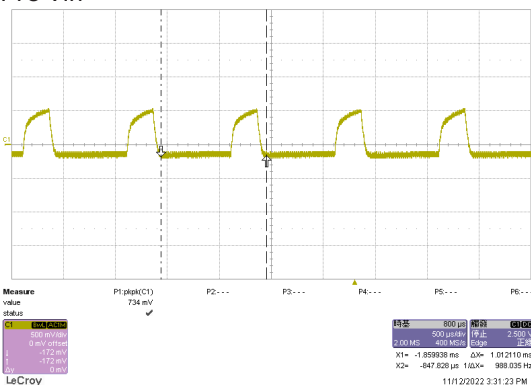


Transient Response to Dynamic Load Change (25%) at 230 Vin

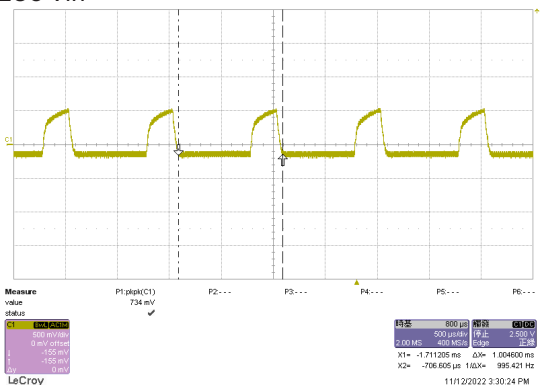


On demand model with 36 Vout


Typical Start-Up Characteristic at 115 Vin

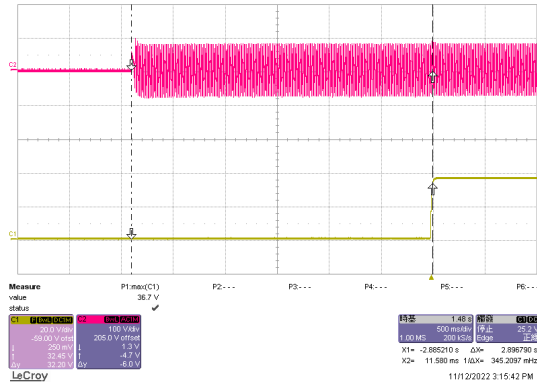


Typical Start-Up Characteristic at 230 Vin

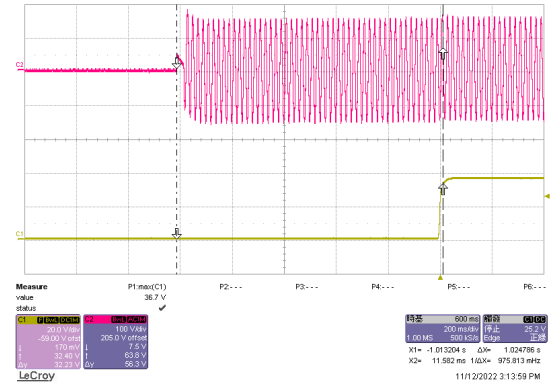


Typical Output Rise Characteristic at 115 Vin

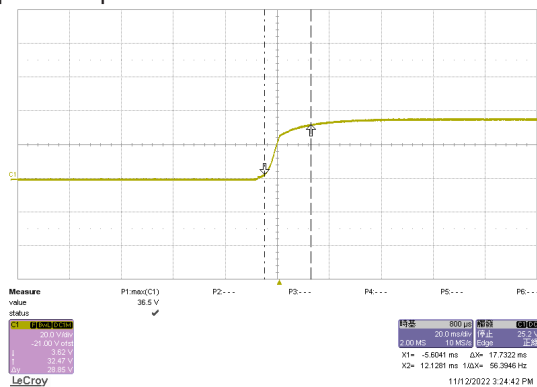


Typical Output Rise Characteristic at 230 Vin

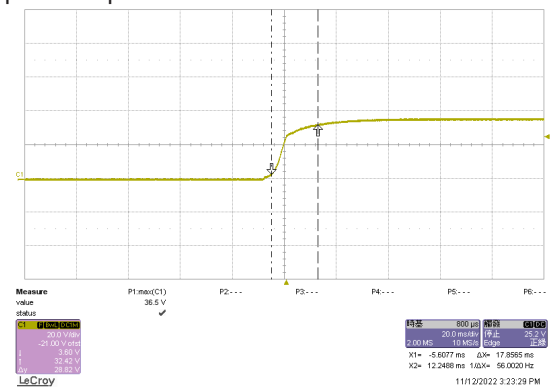

Typical Hold-Up Characteristic at 115 Vin

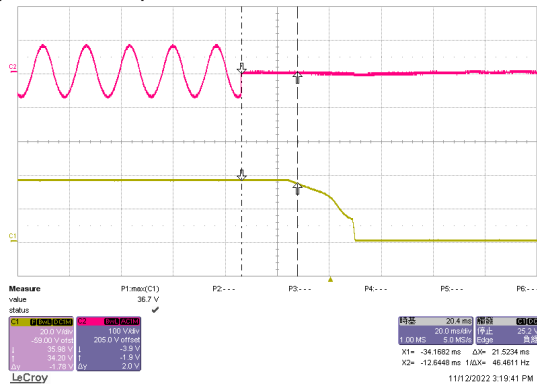


Typical Hold-Up Characteristic at 230 Vin

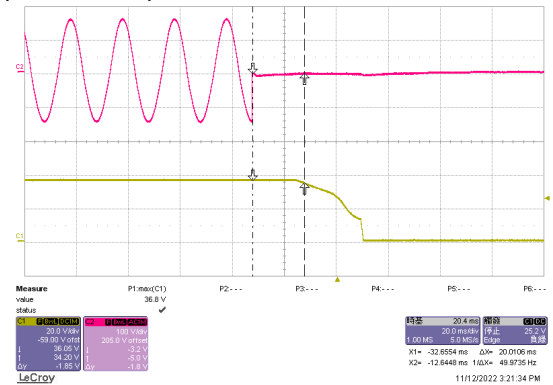


TXLN 200-148


Efficiency versus Output Load

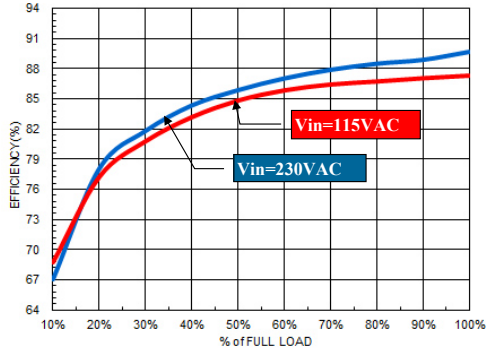


Efficiency versus Input Voltage

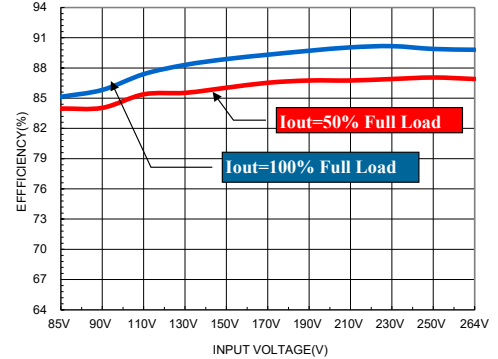


Derating Output Load versus Ambient Temperature

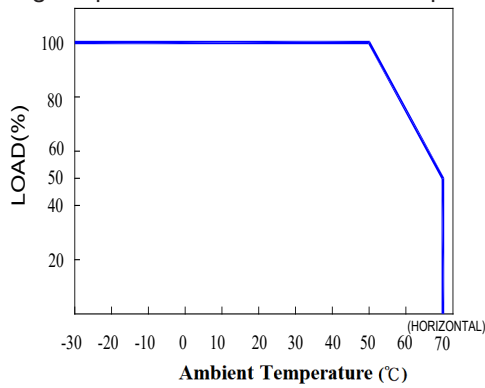


Derating Output Load versus Input Voltage

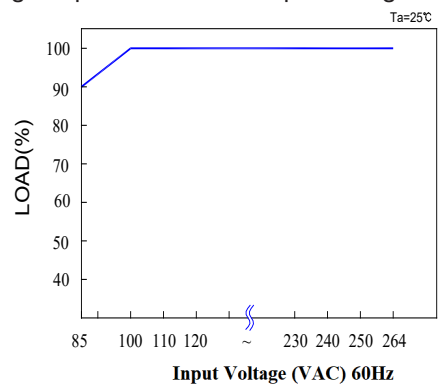


Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

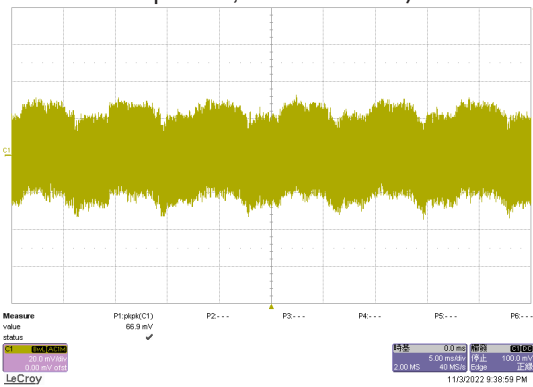


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

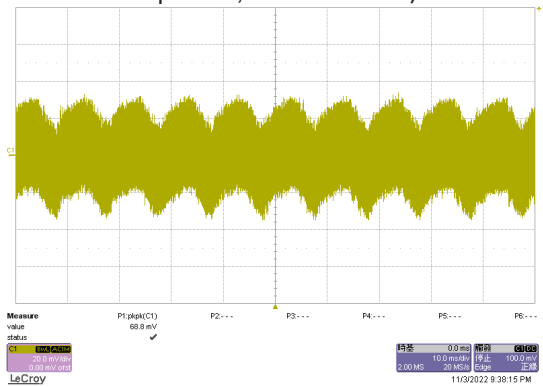

Transient Response to Dynamic Load Change (25%) at 115 Vin

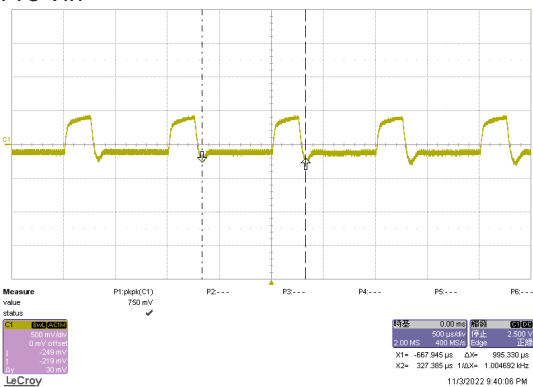


Transient Response to Dynamic Load Change (25%) at 230 Vin

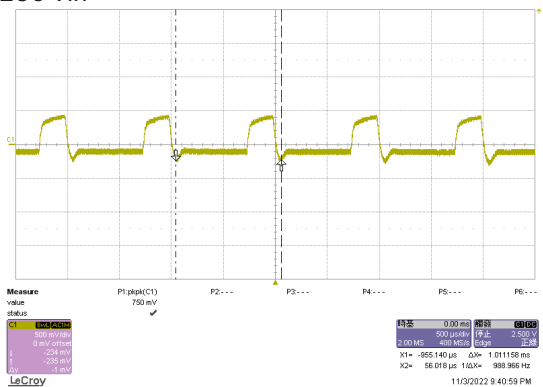


TXLN 200-148

Typical Start-Up Characteristic at 115 Vin

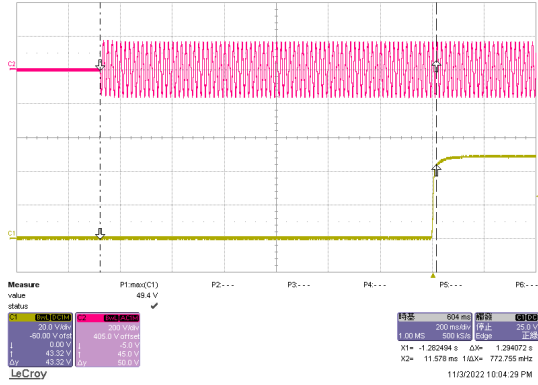

Typical Start-Up Characteristic at 230 Vin

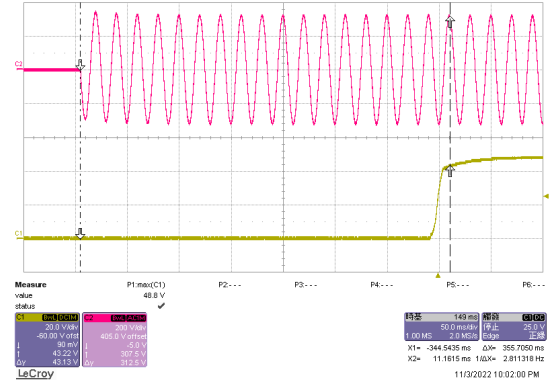

Typical Output Rise Characteristic at 115 Vin

