

- Compact SIP-8 package
- I/O-isolation voltage 1'600 VDC
- Fully regulated outputs
- Operating temp range  $-40^{\circ}\text{C}$  to  $+95^{\circ}\text{C}$
- Continuous short circuit protection
- Remote On/Off
- Designed to meet IEC/EN/UL 62368-1 (not certified)
- 3-year product warranty



TEC 2 is a new series with the design purpose to improve the prevalent 2 Watt SIP-8 DC/DC converters in terms of cost, efficiency and performance. The latest technology and components enable an increase in efficiency by more than 20%. With the reduction of thermal loss, the operating temperature range can be expanded from  $-40^{\circ}\text{C}$  to  $+95^{\circ}\text{C}$ . The converters are fully regulated over 0 - 100% load (no minimum load is required). The low input range is extended from 4.5 to 13.2 VDC while models are also available with the standard 2:1 input ranges (see TEC 2WI series for 4:1 input ranges). The functional isolation system is designed to meet IEC/EN/UL 62368-1 (not certified) with 1600 VDC test voltage.

Models						
Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
TEC 2-0910	4.5 - 13.2 VDC (9 VDC nom.)	3.3 VDC	500 mA			78 %
TEC 2-0911		5 VDC	400 mA			81 %
TEC 2-0919		9 VDC	222 mA			84 %
TEC 2-0912		12 VDC	167 mA			84 %
TEC 2-0913		15 VDC	134 mA			84 %
TEC 2-0915		24 VDC	83 mA			85 %
TEC 2-0921		+5 VDC	200 mA	-5 VDC	200 mA	81 %
TEC 2-0922		+12 VDC	83 mA	-12 VDC	83 mA	85 %
TEC 2-0923		+15 VDC	67 mA	-15 VDC	67 mA	84 %
TEC 2-1210	9 - 18 VDC (12 VDC nom.)	3.3 VDC	500 mA			78 %
TEC 2-1211		5 VDC	400 mA			82 %
TEC 2-1219		9 VDC	222 mA			84 %
TEC 2-1212		12 VDC	167 mA			85 %
TEC 2-1213		15 VDC	134 mA			85 %
TEC 2-1215		24 VDC	83 mA			85 %
TEC 2-1221		+5 VDC	200 mA	-5 VDC	200 mA	82 %
TEC 2-1222		+12 VDC	83 mA	-12 VDC	83 mA	85 %
TEC 2-1223		+15 VDC	67 mA	-15 VDC	67 mA	84 %
TEC 2-2410	18 - 36 VDC (24 VDC nom.)	3.3 VDC	500 mA			78 %
TEC 2-2411		5 VDC	400 mA			83 %
TEC 2-2419		9 VDC	222 mA			85 %
TEC 2-2412		12 VDC	167 mA			86 %
TEC 2-2413		15 VDC	134 mA			85 %
TEC 2-2415		24 VDC	83 mA			85 %
TEC 2-2421		+5 VDC	200 mA	-5 VDC	200 mA	83 %
TEC 2-2422		+12 VDC	83 mA	-12 VDC	83 mA	85 %
TEC 2-2423		+15 VDC	67 mA	-15 VDC	67 mA	86 %
TEC 2-4810	36 - 75 VDC (48 VDC nom.)	3.3 VDC	500 mA			76 %
TEC 2-4811		5 VDC	400 mA			80 %
TEC 2-4819		9 VDC	222 mA			82 %
TEC 2-4812		12 VDC	167 mA			84 %
TEC 2-4813		15 VDC	134 mA			85 %
TEC 2-4815		24 VDC	83 mA			85 %
TEC 2-4821		+5 VDC	200 mA	-5 VDC	200 mA	80 %
TEC 2-4822		+12 VDC	83 mA	-12 VDC	83 mA	85 %
TEC 2-4823		+15 VDC	67 mA	-15 VDC	67 mA	83 %

### Input Specifications

Input Current	- At no load	9 Vin models: <b>45 mA typ.</b> 12 Vin models: <b>25 mA typ.</b> 24 Vin models: <b>10 mA typ.</b> 48 Vin models: <b>8 mA typ.</b>
Surge Voltage		9 Vin models: <b>15 VDC max.</b> (1 s max.) 12 Vin models: <b>25 VDC max.</b> (1 s max.) 24 Vin models: <b>50 VDC max.</b> (1 s max.) 48 Vin models: <b>100 VDC max.</b> (1 s max.)
Under Voltage Lockout		9 Vin models: <b>2 VDC min. / 3 VDC typ. / 4 VDC max.</b> 12 Vin models: <b>6 VDC min. / 7 VDC typ. / 8 VDC max.</b> 24 Vin models: <b>13 VDC min. / 15 VDC typ. / 17 VDC max.</b> 48 Vin models: <b>29 VDC min. / 32 VDC typ. / 35 VDC max.</b>
Recommended Input Fuse		9 Vin models: <b>1'000 mA</b> (slow blow) 12 Vin models: <b>500 mA</b> (slow blow) 24 Vin models: <b>315 mA</b> (slow blow) 48 Vin models: <b>160 mA</b> (slow blow)  (The need of an external fuse has to be assessed in the final application.)
Input Filter		<b>Internal Capacitor</b>

### Output Specifications

Voltage Set Accuracy		<b>±1% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>0.2% max.</b> dual output models: <b>0.2% max.</b>
	- Load Variation (0 - 100%)	single output models: <b>1% max.</b> dual output models: <b>1% max.</b> (Output 1) <b>1% max.</b> (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: <b>5% max.</b>
Ripple and Noise	- 20 MHz Bandwidth	<b>75 mVp-p typ.</b>
Capacitive Load	- single output	3.3 Vout models: <b>3'300 µF max.</b> 5 Vout models: <b>1'680 µF max.</b> 9 Vout models: <b>1'000 µF max.</b> 12 Vout models: <b>820 µF max.</b> 15 Vout models: <b>680 µF max.</b> 24 Vout models: <b>220 µF max.</b>
	- dual output	5 / -5 Vout models: <b>1'000 / 1'000 µF max.</b> 12 / -12 Vout models: <b>470 / 470 µF max.</b> 15 / -15 Vout models: <b>330 / 330 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±0.02 %/K max.</b>
Start-up Time		<b>10 ms typ. / 20 ms max.</b>
Short Circuit Protection		<b>Continuous, Automatic recovery</b>
Output Current Limitation		<b>140 - 240% of Iout max.</b> <b>180% typ. of Iout max.</b>
Transient Response	- Response Time	<b>500 µs typ.</b> (25% Load Step)

### Safety Specifications

Standards	- IT / Multimedia Equipment	<b>Designed for IEC/EN/UL 62368-1 (not certified)</b>
-----------	-----------------------------	---

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

### EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
		External filter proposal: <a href="http://www.tracopower.com/overview/tec2">www.tracopower.com/overview/tec2</a>
EMS (Immunity)	- Electrostatic Discharge	Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 10 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 1$ kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: KY 220 $\mu$ F / 100 V EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A

### General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +95°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	5.9 %/K above 88°C
		See application note: <a href="http://www.tracopower.com/overview/tec2">www.tracopower.com/overview/tec2</a>
Cooling System		Natural convection (20 LFM)
Remote Control	- Current Controlled Remote (passive = on)	On: open circuit Off: 2 to 4 mA current (internal 1 k $\Omega$ resistor) Refers to 'Remote' and '-Vin' Pin
	- Off Idle Input Current	External circuit proposal: <a href="http://www.tracopower.com/info/current-remote.pdf">www.tracopower.com/info/current-remote.pdf</a> 2.5 mA typ.
Regulator Topology		RCC Converter
Switching Frequency		100 kHz min. (PFM)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s	1'600 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 M $\Omega$ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	50 pF max.
Reliability	- Calculated MTBF	6'620'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline <a href="http://www.tracopower.com/info/cleaning.pdf">www.tracopower.com/info/cleaning.pdf</a>
Environment	- Vibration	MIL-STD-810F
	- Mechanical Shock	MIL-STD-810F
	- Thermal Shock	MIL-STD-810F
Housing Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (1 - 2 $\mu$ m)
Pin Surface Plating		Tin (3 - 5 $\mu$ m), matte
Housing Type		Plastic Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		SIP8
Soldering Profile		Lead-Free Wave Soldering
		260°C / 10 s max.
Weight		4.5 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

[www.tracopower.com/info/reach-declaration.pdf](http://www.tracopower.com/info/reach-declaration.pdf)

- RoHS Declaration

REACH SVHC list compliant

REACH Annex XVII compliant

[www.tracopower.com/info/rohs-declaration.pdf](http://www.tracopower.com/info/rohs-declaration.pdf)

Exemptions: 7a, 7c-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule))

- SCIP Reference Number



da94c2df-8904-4ee5-be5d-0f554899272b

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/tec2](http://www.tracopower.com/overview/tec2)

### Outline Dimensions

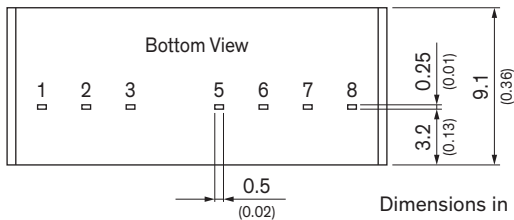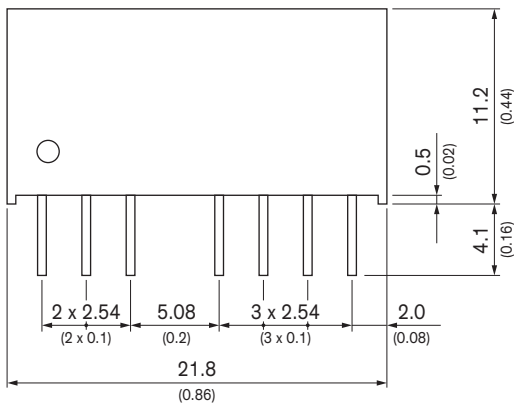

Dimensions in mm (inch)  
 Tolerances:  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin dimension tolerance  $\pm 0.1$  (0.004)

### Pinout

Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	NC	NC
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

NC: Not connected