


Features

- ◆ Ultra-wide 4:1 input range
9 – 36 VDC or 18 – 75 VDC
- ◆ Full SMD design
- ◆ High efficiency up to 85 %
- ◆ Indefinite short circuit protection
- ◆ I/O isolation 1'500 VDC
- ◆ Input filter meets EN 55022, Class A and FCC, Level A without external components
- ◆ Shielded metal case with insulated baseplate
- ◆ 24-pin DIP with industry standard pinout
- ◆ MTTF >1 Mio. h
- ◆ 3-year product warranty

not recommended for new designs

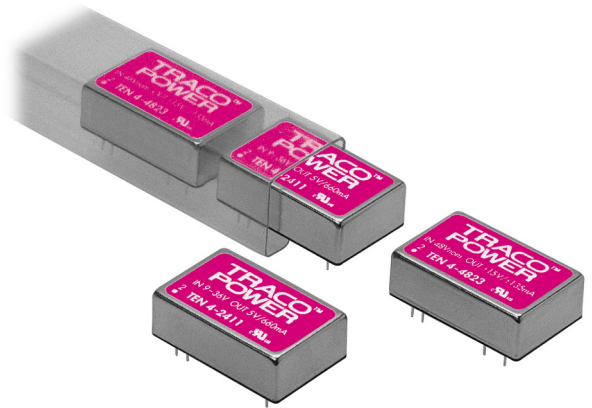

The TEN 4 series DC/DC converter is designed for applications requiring very wide operating voltage range. Typical applications are tele- and data communication systems, mobile battery powered equipments and industrial process control systems with operation from different input voltages i.e. 12/24 VDC or 24/48 VDC battery voltages. High efficiency allows operation up to +75°C at full load. Input filtering according to EN 55022-A and FCC, level A. Low output ripple minimise design-in time and cost.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 4-2410	9 – 36 VDC (24 VDC nominal)	3.3 VDC	900 mA	77 %
TEN 4-2411		5 VDC	660 mA	81 %
TEN 4-2412		12 VDC	330 mA	83 %
TEN 4-2413		15 VDC	265 mA	83 %
TEN 4-2421		±5 VDC	±300 mA	80 %
TEN 4-2422		±12 VDC	±165 mA	83 %
TEN 4-2423		±15 VDC	±130 mA	83 %
TEN 4-4810	18 – 75 VDC (48 VDC nominal)	3.3 VDC	900 mA	78 %
TEN 4-4811		5 VDC	660 mA	82 %
TEN 4-4812		12 VDC	330 mA	85 %
TEN 4-4813		15 VDC	265 mA	85 %
TEN 4-4821		±5 VDC	±300 mA	82 %
TEN 4-4822		±12 VDC	±165 mA	85 %
TEN 4-4823		±15 VDC	±130 mA	85 %

Input Specifications

Input current no load / full load	24 Vin models	20 mA typ. / 400 mA typ. (at 12 VDC Vin) 20 mA typ. / 200 mA typ. (at 24 VDC Vin)
	48 Vin models	6 mA typ. / 200 mA typ. (at 24 VDC Vin) 6 mA typ. / 100 mA typ. (at 48 VDC Vin)
Start-up voltage / under voltage shut down	24 Vin models	8.5 VDC / 8.0 VDC typ.
	48 Vin models	17 VDC / 16 VDC typ.
Surge voltage (1 sec. max.)	24 Vin models	50 V max.
	48 Vin models	100 V max.
Conducted noise (input)	EN 55022 level A, FCC part 15, level A	

Output Specifications

Voltage set accuracy		±1.0 %	
Regulation	<ul style="list-style-type: none"> - Input variation Vin min. to Vin max. - Load variation 10 – 100 % 	0.3 % max.	
		single output models	1.0 % max.
		dual output models	1.0 % max. balanced load 3.0 % max. unbalanced load
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max.	
Temperature coefficient		±0.02 %/K	
Current limitation		>110 % of Iout max., constant current	
Short circuit protection		Hiccup mode, indefinite (automatic recovery)	
Capacitive load	- Single output models	3000 µF max.	
	- Dual output models	680 µF max.	

General Specifications


Temperature ranges	- Operating	-40°C to +75°C
	- Casing temperature	+95°C max.
	- Storage	-40°C to +125°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTTF (MIL-HDBK-217F @ +25°C, ground benign)		>1 Mio. h
Isolation voltage (60 sec.)	- Input/Output	1'500 VDC
Isolation capacity	- Input/Output	380 pF typ.
Isolation resistance	- Input/Output (500 VDC)	>1'000 M Ohm
Switching frequency		350 kHz typ. (Pulse frequency modulation PFM)
Safety standards		UL 1950 , IEC/EN 60950 Compliance up to 60 VDC input voltage (SELV limit)
Safety approvals	- UL/cUL	www.ul.com > UL File no.: E188913

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	Steel chrome-nickel plated
Baseplate material	Epoxy
Potting material	Epoxy (UL 94 V-0 rated)
Weight	16.2 g (0.57 oz)
Soldering temperature	max. 265°C / 10 sec.

Outline Dimensions

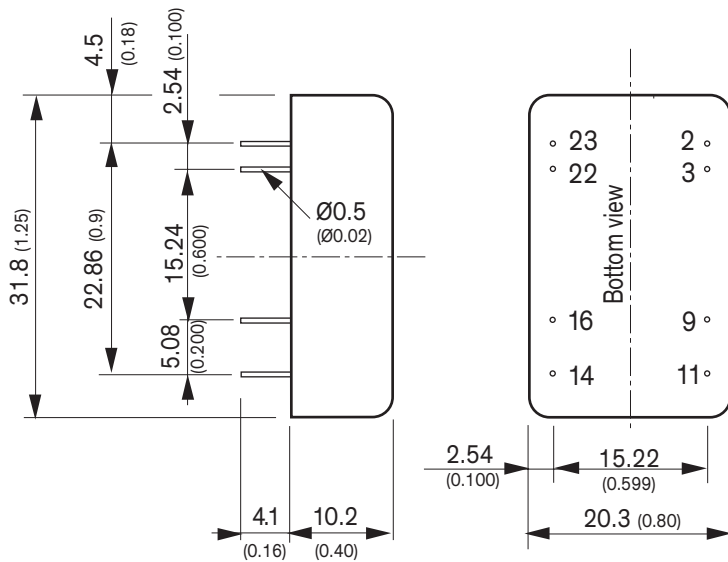

Pin-Out		
Pin	Single	Dual
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No pin	Common
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

NC = Not connected

Dimensions in mm (inch)

Tolerances: x.x ±0.25 (x.xx ±0.01)

x.xx ±0.13 (x.xxx ±0.005)

Pin diameter tolerances: x.x ±0.5 (x.xx ±0.002)