


- Chassis mount with screw terminal block
- Ultra wide 4:1 input voltage ranges 9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Very high efficiency up to 91%
- No minimum load
- Soft start
- Under voltage lock-out circuit
- Adjustable output voltage +10 / -20%
- Sense line
- Optional DIN-rail mounting kit
- 3-year product warranty

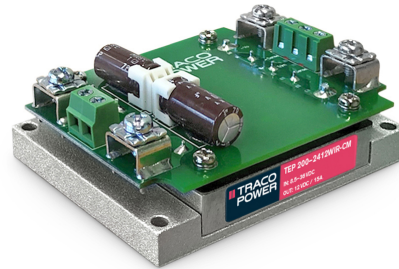

The TEP 200WIRCM Series is a family of isolated high performance DC/DC converter modules with ultra-wide 4:1 input voltage ranges. They come in chassis mount version with screw terminal block. A very high efficiency allows full power operation at 25°C with only 100 LFM air flow cooling and operation at 60°C with only 40% power derating. The very wide input voltage range makes these converters interesting solution for battery operated systems. Typical applications are in telecom/datacom, industry control and railway systems for onboard power distribution.

### Options

TEP-MK1	- Optional DIN-Rail Mounting Kit: <a href="http://www.tracopower.com/overview/tep-mk1">www.tracopower.com/overview/tep-mk1</a>
<p><b>on demand</b> (backorder with MOQ non stocking item)</p>	<ul style="list-style-type: none"> <li>- Optional model with 3.3 VDC and 50'000 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 5 VDC and 36'000 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 12 VDC and 15'000 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 15 VDC and 12'000 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 24 VDC and 7'500 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 28 VDC and 6'500 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 48 VDC and 3'700 mA Output, and 9 - 36 VDC Input</li> <li>- Optional model with 3.3 VDC and 50'000 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 5 VDC and 40'000 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 12 VDC and 18'000 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 15 VDC and 14'000 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 24 VDC and 9'000 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 28 VDC and 7'500 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 48 VDC and 4'500 mA Output, and 18 - 75 VDC Input</li> <li>- Optional model with 3.3 VDC and 57'000 mA Output, and 43 - 160 VDC Input</li> <li>- Optional model with 5 VDC and 44'000 mA Output, and 43 - 160 VDC Input</li> <li>- Optional model with 12 VDC and 20'000 mA Output, and 43 - 160 VDC Input</li> <li>- Optional model with 15 VDC and 16'000 mA Output, and 43 - 160 VDC Input</li> <li>- Optional model with 24 VDC and 10'000 mA Output, and 43 - 160 VDC Input</li> <li>- Optional model with 28 VDC and 8'500 mA Output, and 43 - 160 VDC Input</li> <li>- Optional model with 48 VDC and 5'000 mA Output, and 43 - 160 VDC Input</li> <li>- Optional models with 2:1 Input</li> <li>- Optional models with inverse Remote On/Off function (passive = off)</li> </ul>

### Input Specifications

Input Current	- At no load	24 Vin models: <b>35 mA typ.</b> 48 Vin models: <b>20 mA typ.</b> 110 Vin models: <b>10 mA typ.</b>
Surge Voltage		24 Vin models: <b>50 VDC max.</b> (1 s max.) 48 Vin models: <b>100 VDC max.</b> (1 s max.) 110 Vin models: <b>185 VDC max.</b> (1 s max.)
Under Voltage Lockout		24 Vin models: <b>7.3 VDC min. / 7.7 VDC typ. / 8.1 VDC max.</b> 48 Vin models: <b>15.5 VDC min. / 16 VDC typ. / 16.3 VDC max.</b> 110 Vin models: <b>33 VDC min. / 34.5 VDC typ. / 36 VDC max.</b>
Recommended Input Fuse		24 Vin models: <b>32'000 mA</b> (fast acting) 48 Vin models: <b>20'000 mA</b> (fast acting) 110 Vin models: <b>10'000 mA</b> (fast acting) (The need of an external fuse has to be assessed in the final application.)
Input Filter		<b>Internal Pi-Type</b>

### Output Specifications

Output Voltage Adjustment		-20% to +10% (By external trim resistor) See application note: <a href="http://www.tracopower.com/overview/tep200wircm">www.tracopower.com/overview/tep200wircm</a> Output power must not exceed rated power!
Voltage Set Accuracy		<b>±1% max.</b>
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%)	<b>0.1% max.</b> <b>0.1% max.</b>
Ripple and Noise (20 MHz Bandwidth)		3.3 Vout models: <b>75 mVp-p max.</b> (w/ 1 µF X7R    25 µF poscap) 5 Vout models: <b>75 mVp-p max.</b> (w/ 1 µF X7R    25 µF poscap) 12 Vout models: <b>100 mVp-p max.</b> (w/ 1 µF X7R    25 µF poscap) 15 Vout models: <b>100 mVp-p max.</b> (w/ 1 µF X7R    25 µF poscap) 24 Vout models: <b>200 mVp-p max.</b> (w/ 4.7 µF X7R) 28 Vout models: <b>200 mVp-p max.</b> (w/ 4.7 µF X7R) 48 Vout models: <b>300 mVp-p max.</b> (w/ 2.2 µF X7R)
Capacitive Load	- 24 Vin input	3.3 Vout models: <b>151'000 µF max.</b> 5 Vout models: <b>72'000 µF max.</b> 12 Vout models: <b>12'500 µF max.</b> 15 Vout models: <b>8'000 µF max.</b> 24 Vout models: <b>3'100 µF max.</b> 28 Vout models: <b>2'300 µF max.</b> 48 Vout models: <b>770 µF max.</b>
	- 48 Vin input	3.3 Vout models: <b>151'000 µF max.</b> 5 Vout models: <b>80'000 µF max.</b> 12 Vout models: <b>15'000 µF max.</b> 15 Vout models: <b>9'300 µF max.</b> 24 Vout models: <b>3'700 µF max.</b> 28 Vout models: <b>2'600 µF max.</b> 48 Vout models: <b>930 µF max.</b>
	- 110 Vin input	3.3 Vout models: <b>172'000 µF max.</b> 5 Vout models: <b>88'000 µF max.</b> 12 Vout models: <b>16'600 µF max.</b> 15 Vout models: <b>10'600 µF max.</b> 24 Vout models: <b>4'100 µF max.</b> 28 Vout models: <b>3'000 µF max.</b> 48 Vout models: <b>1'000 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±0.02 %/K max.</b>

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Hold-up Time		10 ms min. (acc. to EN 50155 Class S2, see application note for ext. capacitor calculation: <a href="http://www.tracopower.com/info/holdup_en50155.pdf">www.tracopower.com/info/holdup_en50155.pdf</a> )
Start-up Time		75 ms typ.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		120 - 150% of I <sub>out</sub> max.
Oversoltage Protection		115 - 130% of V <sub>out</sub> nom.
Transient Response	- Response Time	200 µs typ. / 250 µs max. (25% Load Step)

### Safety Specifications

Standards	- IT / Multimedia Equipment	EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1
	- Railway Applications - Certification Documents	EN 50155 <a href="http://www.tracopower.com/overview/tep200wircm">www.tracopower.com/overview/tep200wircm</a>
Pollution Degree		PD 2
Over Voltage Category		OVC II

### EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 50121-3-2 (EMC for Rolling Stock) EN 55011 class B (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55011 class B (with external filter) EN 55032 class B (with external filter)
		External filter proposal: <a href="http://www.tracopower.com/overview/tep200wircm">www.tracopower.com/overview/tep200wircm</a>
EMS (Immunity)	- Electrostatic Discharge	EN 50121-3-2 (EMC for Rolling Stock) Air: EN 61000-4-2, ±8 kV, perf. criteria A Contact: EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV, perf. criteria A
		Ext. input component: 24 & 48 V <sub>in</sub> models: 2 x KY 220 µF 110 V <sub>in</sub> models: 2 x KXJ 150 µF
	- Conducted RF Disturbances	EN 61000-4-6, 10 V <sub>rms</sub> , perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
EMC / Environmental	- Certification Documents	<a href="http://www.tracopower.com/overview/tep200wircm">www.tracopower.com/overview/tep200wircm</a>

### General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +75°C
	- Case Temperature	+115°C max.
	- Storage Temperature	-40°C to +105°C
Power Derating	- High Temperature	Depending on model
		See application note: <a href="http://www.tracopower.com/overview/tep200wircm">www.tracopower.com/overview/tep200wircm</a>
Over Temperature Protection Switch Off	- Protection Mode	120°C typ. (Automatic recovery at 105°C typ.)
	- Measurement Point	Base-Plate
Cooling System		Natural convection (20 LFM)
Sense Function		10% max. of V <sub>out</sub> nom. (If sense function is not used, sense pins must be connected to corresponding polarity output pins.)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Remote Control	<ul style="list-style-type: none"> <li>- Voltage Controlled Remote (passive = on)</li> <li>- Off Idle Input Current</li> <li>- Remote Pin Input Current</li> </ul>	<p>On: 3.0 to 12 VDC or open circuit  Off: 0 to 1.2 VDC or short circuit  Refers to 'Remote' and '-Vin' Pin  3 mA typ.  -0.5 to 1.0 mA  (Optional models with inverse Remote On/Off function (passive = off))</p>
Altitude During Operation		<p>2'000 m max. (for reinforced insulation)  5'000 m max. (for functional insulation)</p>
Regulator Topology		<b>Forward Converter</b>
Switching Frequency		<p>225 - 275 kHz (PWM)  250 kHz typ. (PWM)</p>
Insulation System		<b>Reinforced Insulation</b>
Working Voltage (rated)		<p>145 VAC (3.3 and 5 Vout models)  185 VAC (48 Vout models)  172 VAC (other output models)</p>
Isolation Test Voltage	<ul style="list-style-type: none"> <li>- Input to Output, 60 s</li> <li>- Input to Case, 60 s</li> <li>- Output to Case, 60 s</li> </ul>	<p>3'000 VAC  1'500 VAC  1'500 VAC</p>
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'500 pF max.
Reliability	- Calculated MTBF	300'000 h (MIL-HDBK-217F, ground benign)
Environment	<ul style="list-style-type: none"> <li>- Vibration</li> <li>- Mechanical Shock</li> <li>- Thermal Shock</li> <li>- Flammability</li> </ul>	<p>MIL-STD-810F  EN 61373  MIL-STD-810F  EN 61373  MIL-STD-810F  EN 45545-2  <a href="http://www.tracopower.com/info/en45545-declaration.pdf">www.tracopower.com/info/en45545-declaration.pdf</a></p>
Housing Material		<p>Alu base-plate w. metal case (24 and 48 Vin models)  Alu base-plate w. plastic case (110 Vin models)</p>
Base Material		Non-conductive FR4 (UL 94 V-0 rated) (24 and 48 Vin models only)
Potting Material		Silicone (UL 94 V-0 rated)
Housing Type		<p>Metal Case (24 and 48 Vin models)  Plastic Case (110 Vin models)</p>
Mounting Type		<b>Chassis Mount</b>
Connection Type		<b>Screw Terminal</b>
Weight		235 g
Thermal Impedance	- Case to Ambient	6.1 K/W typ.
Environmental Compliance	<ul style="list-style-type: none"> <li>- REACH Declaration</li> <li>- RoHS Declaration</li> <li>- SCIP Reference Number</li> </ul>	<p><a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a>  REACH SVHC list compliant  REACH Annex XVII compliant  <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>  Exemptions: 7a, 7c-I  (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule))  30fb4cdc-3429-4c17-8e8b-1ebbb46980b9</p>


## Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/tep200wircm](http://www.tracopower.com/overview/tep200wircm)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

**Outline Dimensions**

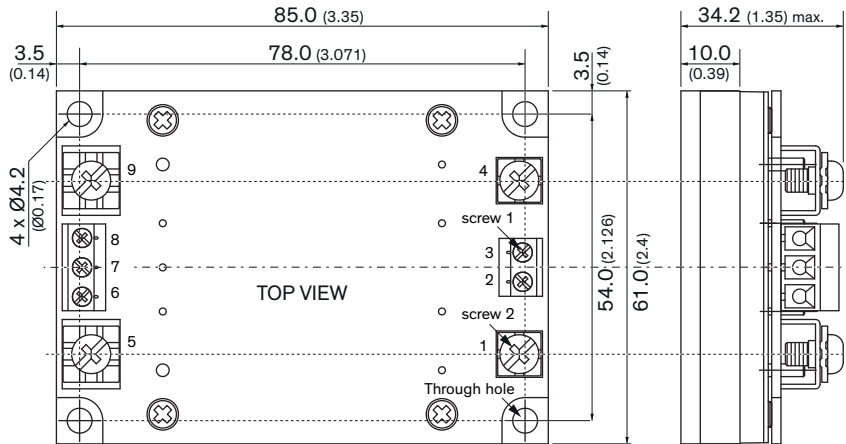

Pinout	
Pin	Single
1	-Vin (GND)
2	NC
3	Remote On/Off
4	+Vin (Vcc)
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

NC: Not connected

Wire gauge range:  
AWG 14 - 26

Dimensions in mm (inch)  
Tolerances x.x ±0.5 (x.xx ±0.02)  
                  x.xx ±0.25 (x.xxx ±0.01)  
Mounting hole pitch tolerances ±0.25 (±0.01)

Screw 2:  
Type M5  
Head diameter 8.9 (0.350)  
Rated current: 65 A

The screw 1 locked torque: max. 5.2 kgfcm / 0.51 Nm  
The screw 2 locked torque: max. 16.8 kgfcm / 1.65 Nm

Mounting screw locked torque: max. 11.2 kgfcm / 1.10 Nm