

- Compact metal case with screw terminal block
- Universal input 88-264 VAC
- Convection cooled (no-fan)
- High efficiency up to 86%
- Compliance to EN 61000-3-2
- Short circuit, overvoltage and overload protection
- IEC/EN/UL 62368-1 safety approvals
- 3-year product warranty



The TXLN series is a family of encased power supplies designed for a wide range of cost critical applications. With a low profile metal case and screw terminal block connection, they are easy to install in any equipment. These power supplies have universal input and comply with European EMC standards and the Low Voltage Directive (LVD).

Models						
Order Code	Output Power	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
TXLN 035-103	30 W	3.3 VDC	9'000 mA			74 %
TXLN 035-105	35 W	5 VDC	7'000 mA			79 %
TXLN 035-112		12 VDC	3'000 mA			82 %
TXLN 035-115		15 VDC	2'400 mA			84 %
TXLN 035-124		24 VDC	1'500 mA			85 %
TXLN 035-148	38 W	48 VDC	800 mA			86 %
TXLN 035-212	35 W	+5 VDC	4'000 mA	+12 VDC	2'500 mA	79 %
TXLN 035-215		+5 VDC	4'000 mA	+24 VDC	1'300 mA	79 %
TXLN 035-22M2		+12 VDC	3'000 mA	-12 VDC	1'500 mA	83 %
TXLN 035-23M3		+15 VDC	2'400 mA	-15 VDC	1'500 mA	84 %

Options	
on demand (backorder with MOQ non stocking item)	- Optional model with 7.5 VDC and 4'700 mA - Optional model with 30 VDC and 1'200 mA

Note - Total output power must not exceed rated power.

### Input Specifications

Input Voltage	- AC Range	Operational Range: <b>88 - 264 VAC</b> (Full Range) Rated Range: <b>100 - 240 VAC</b> (Full Range)
	- DC Range	Operational Range: <b>125 - 375 VDC</b> (Designed for, no certification) Polarity: <b>irrelevant</b>
Input Frequency		Operational Range: <b>47 - 63 Hz</b> Certified: <b>50/60 Hz</b>
Power Consumption	- No load & Vin = 230 VAC	<b>500 mW max.</b>
Input Current	- Full load & Vin = 115 VAC	<b>1'000 mA max.</b>
Input Inrush Current	- At 230 VAC	<b>50 A max.</b>
	- At 115 VAC	<b>30 A max.</b>
Input Protection		<b>T 2 A / 250 VAC</b> (Internal Fuse)
Recommended Input Fuse		<b>2'000 mA</b> (slow blow) (The need of an external fuse has to be assessed in the final application.)

### Output Specifications

Output Voltage Adjustment		<b>±10%</b> (single output models only) (By trim potentiometer) Output power must not exceed rated power!
Voltage Set Accuracy		<b>±3% max.</b> (3.3 Vout model)
		<b>±2% max.</b> (5 Vout model)
		<b>±1% max.</b> (other single output models)
		<b>±2% / ±5% max.</b> (5/12 and 5/24 Vout models)
		<b>±1% / ±5% max.</b> (other dual output models)
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>1.5% max.</b> (3.3 Vout model) <b>1.0% max.</b> (5 Vout model) <b>0.5% max.</b> (other single output models)
		dual output models: <b>0.5% max.</b> (Output 1, 12/-12 and 15/-15 Vout) <b>1.0% max.</b> (Output 1, 5/12 and 5/24 Vout) <b>2.5% max.</b> (Output 2)
	- Load Variation (0 - 100%)	single output models: <b>3% max.</b> (3.3 Vout model) <b>2% max.</b> (5 Vout model) <b>1% max.</b> (other single output models)
		dual output models: <b>2% max.</b> (Output 1) <b>5% max.</b> (Output 2)
Ripple and Noise (20 MHz Bandwidth)	- single output	3.3 VDC model: <b>70 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		5 VDC model: <b>70 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		7.5 VDC model: <b>80 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		12 VDC model: <b>120 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		15 VDC model: <b>150 mVp-p max.</b> (w/ 0.1 µF    47 µF)
	- dual output	24 VDC model: <b>150 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		30 VDC model: <b>200 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		48 VDC model: <b>200 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		5 / 12 VDC model: <b>70 / 120 mVp-p max.</b> (w/ 0.1 µF    47 µF)
		5 / 24 VDC model: <b>70 / 240 mVp-p max.</b> (w/ 0.1 µF    47 µF)
	12 / -12 VDC model: <b>120 / 120 mVp-p max.</b> (w/ 0.1 µF    47 µF)	
	15 / -15 VDC model: <b>150 / 150 mVp-p max.</b> (w/ 0.1 µF    47 µF)	

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Capacitive Load	- single output	3.3 VDC model: 108'000 µF max. 5 VDC model: 108'000 µF max. 7.5 VDC model: 108'000 µF max. 12 VDC model: 45'000 µF max. 15 VDC model: 27'000 µF max. 24 VDC model: 90'000 µF max. 30 VDC model: 7'200 µF max. 48 VDC model: 3'000 µF max.
	- dual output	5 / 12 VDC model: 108'000 / 63'000 µF max. 5 / 24 VDC model: 108'000 / 13'500 µF max. 12 / -12 VDC model: 36'000 / 45'000 µF max. 15 / -15 VDC model: 18'000 / 27'000 µF max.
Minimum Load	- single output	3.3 VDC model: 0 % of I <sub>out</sub> max. 5 VDC model: 0 % of I <sub>out</sub> max. 7.5 VDC model: 0 % of I <sub>out</sub> max. 12 VDC model: 0 % of I <sub>out</sub> max. 15 VDC model: 0 % of I <sub>out</sub> max. 24 VDC model: 0 % of I <sub>out</sub> max. 30 VDC model: 0 % of I <sub>out</sub> max. 48 VDC model: 0 % of I <sub>out</sub> max.
	- dual output	5 / 12 VDC model: 7.5 % of I <sub>out</sub> max. 5 / 24 VDC model: 7.5 % of I <sub>out</sub> max. 12 / -12 VDC model: 10 % of I <sub>out</sub> max. 15 / -15 VDC model: 12.5 % of I <sub>out</sub> max.  (dual output models: minimum load is required only on Output 1)
Temperature Coefficient		±0.03 %/K max.
Hold-up Time	- At 230 VAC	40 ms min.
	- At 115 VAC	20 ms min.
Start-up Time	- At 230 VAC	1'000 ms max.
	- At 115 VAC	1'000 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		105 - 150% of I <sub>out</sub> max.
Overvoltage Protection		115 - 140% of V <sub>out</sub> nom. (only Output 1)

## Safety Specifications

Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	<a href="http://www.tracopower.com/overview/txln035">www.tracopower.com/overview/txln035</a>
Protection Class		Class I (Prepared): Connection to PE
Pollution Degree		PD 2
Over Voltage Category		OVC II

## EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 55032 class B (internal filter)
	- Radiated Emissions	EN 55032 class B (internal filter)
	- Harmonic Current Emissions	EN 61000-3-2, class A
	- Voltage Fluctuations & Flicker	EN 61000-3-3

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

<b>EMS (Immunity)</b>		EN 55024 (IT Equipment) EN 55035 (Multimedia)
	- Electrostatic Discharge	Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 4$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 3 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 1$ kV, perf. criteria A
		L to L: EN 61000-4-5, $\pm 1$ kV, perf. criteria A L to PE: EN 61000-4-5, $\pm 2$ kV, perf. criteria A
	- Conducted RF Disturbances	EN 61000-4-6, 3 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 3 A/m, perf. criteria A
	- Voltage Dips & Interruptions	230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 250 periods, perf. criteria C

## General Specifications

<b>Relative Humidity</b>		90% max. (non condensing)
<b>Temperature Ranges</b>	- Operating Temperature	-20°C to +70°C
	- Storage Temperature	-40°C to +85°C
<b>Power Derating</b>	- High Temperature	2.5 %/K above 50°C
	- Low Input Voltage	0.83 %/V below 100 VAC
		See application note: <a href="http://www.tracopower.com/overview/txln035">www.tracopower.com/overview/txln035</a>
<b>Cooling System</b>		Natural convection (20 LFM)
<b>Altitude During Operation</b>		2'000 m max.
<b>Regulator Topology</b>		Flyback Converter
<b>Switching Frequency</b>		58 - 72 kHz (PWM)
<b>Insulation System</b>		Reinforced Insulation
<b>Working Voltage (rated)</b>		275 VAC
<b>Isolation Test Voltage</b>	- Input to Output, 60 s	3'000 VAC
	- Input to Case or PE, 60 s	1'800 VAC
	- Output to Case or PE, 60 s	500 VAC
<b>Isolation Resistance</b>	- Input to Output, 500 VDC	100 M $\Omega$ min.
<b>Isolation Capacitance</b>	- Input to Output, 100 kHz, 1 V	20'000 pF max.
<b>Leakage Current (at 264 VAC)</b>	- Earth Leakage Current	1000 $\mu$ A max.
<b>Distance Through Isolation</b>		6 mm
<b>Reliability</b>	- Calculated MTBF	400'000 h (single output models) 340'000 h (dual output models) (MIL-HDBK-217F, ground benign)
<b>Housing Material</b>		Aluminum
<b>Housing Type</b>		Metal Case
<b>Mounting Type</b>		Chassis Mount
<b>Connection Type</b>		Screw Terminal
<b>Weight</b>	- single output	340 g
	- dual output	350 g
<b>Status Indicator</b>		Indicated by green LED
<b>Environmental Compliance</b>	- REACH Declaration	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	<a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> Exemptions: 7a, 7c-1 (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).)
	- SCIP Reference Number	985553c3-9871-445e-b500-dfd7fefb12eb

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.


### Supporting Documents

[Overview Link](#) (for additional Documents)

[www.tracopower.com/overview/txln035](http://www.tracopower.com/overview/txln035)

### Outline Dimensions

#### Single Output Models

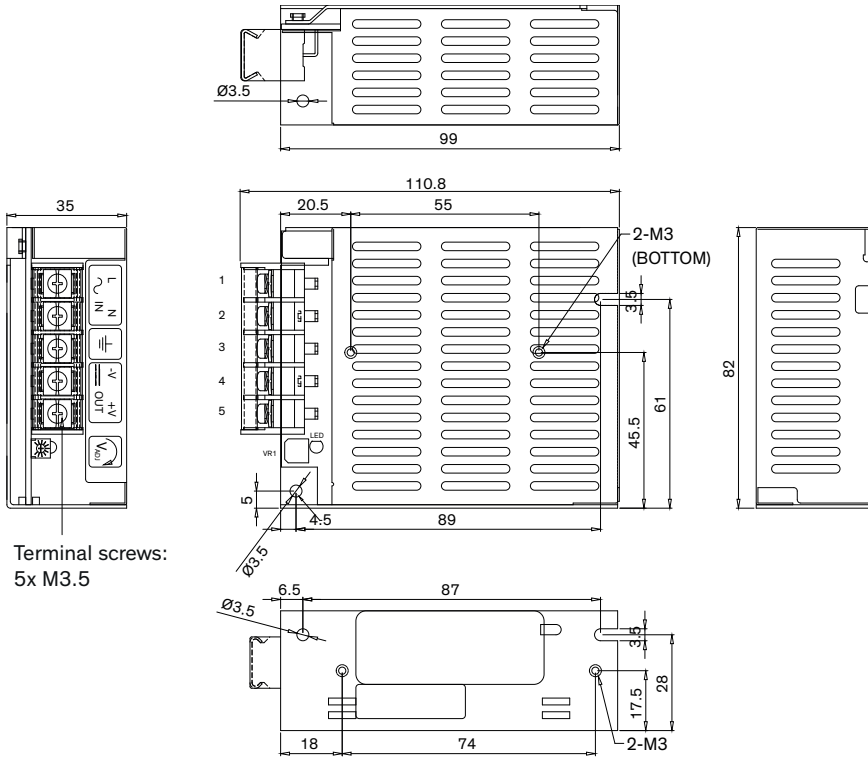

Terminal screws:  
5x M3.5

Dimensions in mm  
Tolerances:  
0-8: ±0.2  
8-25: ±0.3  
25-80: ±0.5  
80-250: ±0.8


Mounting screws  
Max. screw penetration depth: 4.5  
Max. screw locked torque: 0.8 Nm

Screw Terminal	
Pin	Function
1	AC (L)
2	AC (N)
3	FG
4	-Vout
5	+Vout

Max. terminal screw locked torque: 0.7 Nm

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

### Dual Output Models

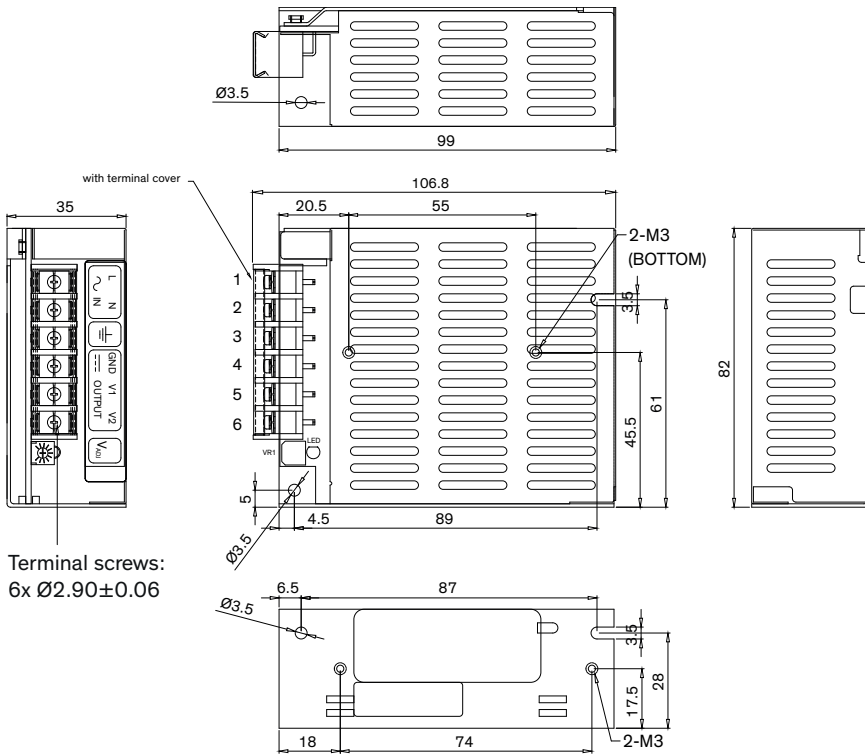

Dimensions in mm  
Tolerances:  
0-8: ±0.2  
8-25: ±0.3  
25-80: ±0.5  
80-250: ±0.8

Mounting screws  
Max. screw penetration depth: 4.5  
Max. screw locked torque: 0.8 Nm

Screw Terminal	
Pin	Function
1	AC (L)
2	AC (N)
3	PE
4	GND
5	Output 1
6	Output 2

Max. terminal screw locked torque: 0.7 Nm